


35B 系列 SERIES 重型抗冲击 Heavy Duty (Shock Resistant)

安装尺寸 Installation Drawing

平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




4-8"
380-800 Kg

		性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN		
PUCB		运行省力 Rollability	良好 Good	轮面硬度 Hardness 95±3A	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	4"	45	380	35B27-0128	8	35B26-0128	8	35B28-0128	8
		耐磨耐用 Durability					5"	48	480	35B03-0129	7	35B01-0129	7	35B02-0129	7
		运行静音 Quiet Operation					6"	50	580	35B06-0130	6	35B04-0130	6	35B05-0130	6
		地面保护 Floor Protection					8"	50	720	35B09-0131	5	35B07-0131	5	35B08-0131	5
PUCB		运行省力 Rollability	良好 Good	轮面硬度 Hardness 95±3A	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	430	35B03-1136	7	35B01-1136	7	35B02-1136	7
		耐磨耐用 Durability					6"	48	530	35B06-1137	6	35B04-1137	6	35B05-1137	6
		运行静音 Quiet Operation					8"	48	650	35B09-1138	5	35B07-1138	5	35B08-1138	5
		地面保护 Floor Protection													
PUAB		运行省力 Rollability	良好 Good	轮面硬度 Hardness 95±3A	铝芯聚氨酯 Aluminum core polyurethane	双滚珠 Ball bearing	4"	45	400	35B27-1424	8	35B26-1424	8	35B28-1424	8
		耐磨耐用 Durability					5"	48	500	35B03-1425	7	35B01-1425	7	35B02-1425	7
		运行静音 Quiet Operation					6"	50	630	35B06-1426	6	35B04-1426	6	35B05-1426	6
		地面保护 Floor Protection					8"	50	800	35B09-1427	5	35B07-1427	5	35B08-1427	5
PUAB		运行省力 Rollability	良好 Good	轮面硬度 Hardness 95±3A	铝芯聚氨酯 Aluminum core polyurethane	双滚珠 Ball bearing	4"	48	380	35B27-1428	8	35B26-1428	8	35B28-1428	8
		耐磨耐用 Durability					5"	48	460	35B03-1429	7	35B01-1429	7	35B02-1429	7
		运行静音 Quiet Operation					6"	48	600	35B06-1430	6	35B04-1430	6	35B05-1430	6
		地面保护 Floor Protection					8"	48	760	35B09-1431	5	35B07-1431	5	35B08-1431	5
NRCB		运行省力 Rollability	良好 Good	轮面硬度 Hardness 85±3A	铁芯橡胶 Rubber on cast iron core	双滚珠 Ball bearing	5"	48	300	35B03-1146	7	35B01-1146	7	35B02-1146	7
		耐磨耐用 Durability					6"	48	350	35B06-1147	6	35B04-1147	6	35B05-1147	6
		运行静音 Quiet Operation					8"	48	400	35B09-1148	5	35B07-1148	5	35B08-1148	5
		地面保护 Floor Protection													

外形尺寸 Overall Dimensions


尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
4"	100	150	34	85.5	147.5
5"	125	175	34	97	147.5
6"	150	200	38	113.5	147.5
8"	200	248	47	148	172.5

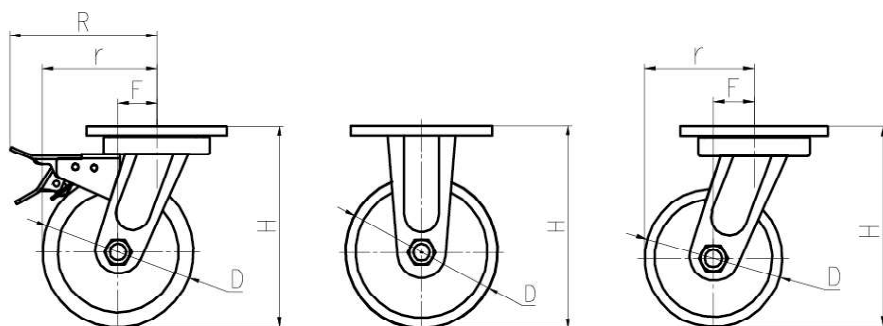

产品特点 Product Features

- 喷塑支架
- 4-8寸底板10mm
- 支架8mm
- 底板采用平面压力轴承
- 性能优良
- 抗冲击
- Powder bracket
- 4"-8" thickness of top plate 10mm
- Thickness of bracket 8mm
- Tapered bearing
- Excellent performance
- Anti shock

可选拉环刹 Optional Pull Ring Brake

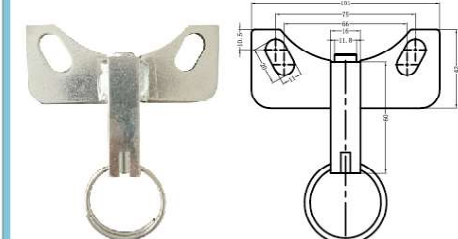



选配轮片 Optional Wheels



35B 系列 SERIES 重型抗冲击 Heavy Duty (Shock Resistant)

安装尺寸 Installation Drawing

平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




4-12"
450-1400 Kg

性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN
PACB 运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	铁芯尼龙 Nylon on cast iron core	双滚珠 Ball bearing	5"	48	700	35B03-1149	7	35B01-1149	7	35B02-1149	7
			6"	50	900	35B06-1150	6	35B04-1150	6	35B05-1150	6
			8"	50	1100	35B09-1151	5	35B07-1151	5	35B08-1151	5
			10"	62	1200	35B12-1209	2	35B10-1209	2	35B11-1209	2
			12"	62	1400	35B15-1210	2	35B13-1210	2	35B14-1210	2
PUCB 运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	50	600	35B03-0206	7	35B01-0206	7	35B02-0206	7
			6"	50	800	35B06-0207	6	35B04-0207	6	35B05-0207	6
			8"	50	1000	35B09-0208	5	35B07-0208	5	35B08-0208	5
			10"	62	1100	35B12-0203	2	35B10-0203	2	35B11-0203	2
			12"	62	1300	35B15-0204	2	35B13-0204	2	35B14-0204	2
PA-B 运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	超级尼龙 Nylon	双滚珠 Ball bearing	4"	46	450	35B27-1645	7	35B26-1645	7	35B28-1645	7
			5"	46	650	35B03-1646	7	35B01-1646	7	35B02-1646	7
			6"	48	850	35B06-1647	6	35B04-1647	6	35B05-1647	6
			8"	48	1050	35B09-1648	5	35B07-1648	5	35B08-1648	5
MP-B 运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	改性PP Modified polypropylene	双滚珠 Ball bearing	5"	50	500	35B03-1394	7	35B01-1394	7	35B02-1394	7
			6"	50	600	35B06-1395	6	35B04-1395	6	35B05-1395	6
			8"	50	700	35B09-1396	5	35B07-1396	5	35B08-1396	5
CICB 运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	铸铁 Cast iron	双滚珠 Ball bearing	5"	50	600	35B03-1125	7	35B01-1125	7	-	-
			6"	50	700	35B06-1126	6	35B04-1126	6	-	-
			8"	50	800	35B09-1127	5	35B07-1127	5	-	-

外形尺寸 Overall Dimensions


尺寸 D	轮径 D	平底 全高 H	偏心距 F	旋转 半径 r	旋转 半径 R
4"	100	150	34	85.5	147.5
5"	125	175	34	97	147.5
6"	150	200	38	113.5	147.5
8"	200	248	47	148	172.5
10"	250	305	60	186	186
12"	300	355	60	210.5	210.5

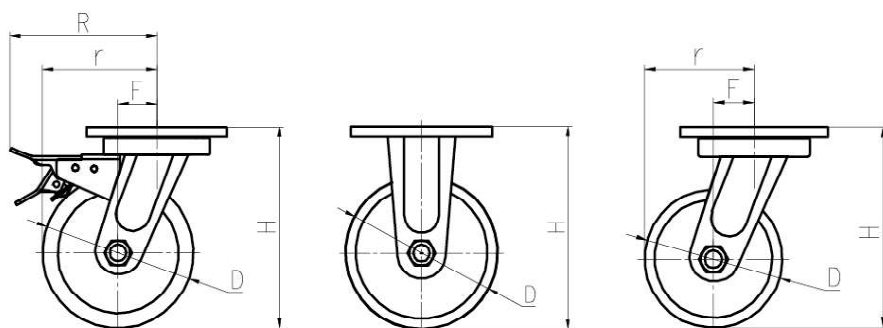

产品特点 Product Features

- 喷塑支架
· 4-8寸底板10mm
· 10-12寸底板12mm
· 支架8mm
· 底板采用平面压力轴承
· 性能优良
· 抗冲击
- Powder bracket
· 4"-8"Thickness of top plate 10mm
· 10"-12"Thickness of top plate 12mm
· Thickness of bracket 8mm
· Tapered bearing
· Excellent performance
· Anti shock


可选拉环刹 Optional Pull Ring Brake

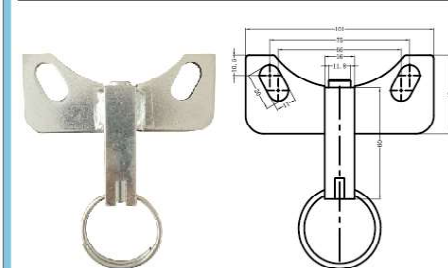

10-12"产品刹车为拉环刹车结构，轮片无防缠盖。
The 10-12" product brake is of pull ring brake structure, and the wheel plate has no anti wrapping cover.

36A 系列 SERIES 重型抗冲击 Heavy Duty (Shock Resistant)

安装尺寸 Installation Drawing



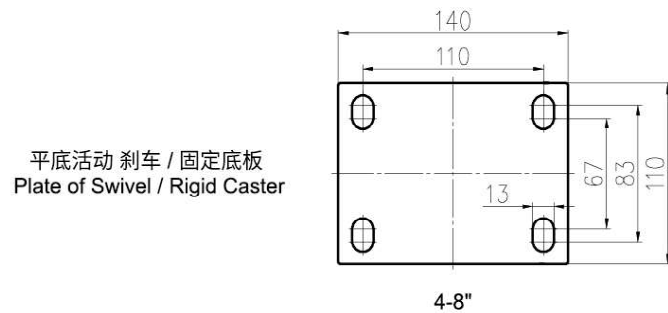


4-8"
380-800 Kg

性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN
 PUCB	 铁芯聚氨酯 Polyurethane on cast iron core	 双滚珠 Ball bearing	4"	45	380	36A03-0128	8	36A01-0128	8	36A02-0128	8
			5"	48	480	36A06-0129	7	36A04-0129	7	36A05-0129	7
			6"	50	580	36A09-0130	6	36A07-0130	6	36A08-0130	6
			8"	50	720	36A12-0131	5	36A10-0131	5	36A11-0131	5
 PUCB	 铁芯聚氨酯 Polyurethane on cast iron core	 双滚珠 Ball bearing	5"	48	430	36A06-1136	7	36A04-1136	7	36A05-1136	7
			6"	48	530	36A09-1137	6	36A07-1137	6	36A08-1137	6
			8"	48	650	36A12-1138	5	36A10-1138	5	36A11-1138	5
 PUAB	 铝芯聚氨酯 Aluminum core polyurethane	 双滚珠 Ball bearing	4"	50	400	36A03-1424	8	36A01-1424	8	36A02-1424	8
			5"	50	500	36A06-1425	7	36A04-1425	7	36A05-1425	7
			6"	50	630	36A09-1426	6	36A07-1426	6	36A08-1426	6
			8"	50	800	36A12-1427	5	36A10-1427	5	36A11-1427	5
 PUAB	 铝芯聚氨酯 Aluminum core polyurethane	 双滚珠 Ball bearing	4"	50	380	36A03-1428	8	36A01-1428	8	36A02-1428	8
			5"	50	460	36A06-1429	7	36A04-1429	7	36A05-1429	7
			6"	50	600	36A09-1430	6	36A07-1430	6	36A08-1430	6
			8"	50	760	36A12-1431	5	36A10-1431	5	36A11-1431	5

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
4"	100	155	34	86	140.5
5"	125	176	38	101.5	147
6"	150	201	44	120	150
8"	200	252	54	155	173




产品特点 Product Features

- 镀锌支架
- 底板7.5mm
- 支架6mm
- 底板采用平面压力轴承
- 性能优良
- 抗冲击
- Galvanized bracket
- Thickness of top plate 7.5mm
- Thickness of bracket 6mm
- Tapered bearing
- Excellent performance
- Anti shock

选配轮片 Optional Wheels




选配底板 Optional Plate



36A 系列 SERIES 重型抗冲击 Heavy Duty (Shock Resistant)

安装尺寸 Installation Drawing



平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




4-8"
300-800 Kg

	性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN
CICB	运行省力 Rollability	铸铁 Cast iron	双滚珠 Ball bearing	5"	50	600	36A06-1125	7	36A04-1125	7	-	-
	耐磨耐用 Durability			6"	50	700	36A09-1126	6	36A07-1126	6	-	-
	运行静音 Quiet Operation			8"	50	800	36A12-1127	5	36A10-1127	5	-	-
	地面保护 Floor Protection											
NRCB	运行省力 Rollability	铁芯橡胶 Rubber on cast iron core	双滚珠 Ball bearing	5"	48	300	36A06-1146	7	36A04-1146	7	36A05-1146	7
	耐磨耐用 Durability			6"	48	350	36A09-1147	6	36A07-1147	6	36A08-1147	6
	运行静音 Quiet Operation			8"	48	400	36A12-1148	5	36A10-1148	5	36A11-1148	5
	地面保护 Floor Protection											
MP-B	运行省力 Rollability	改性PP Modified polypropylene	双滚珠 Ball bearing	5"	50	500	36A06-1394	7	36A04-1394	7	36A05-1394	7
	耐磨耐用 Durability			6"	50	600	36A09-1395	6	36A07-1395	6	36A08-1395	6
	运行静音 Quiet Operation			8"	50	700	36A12-1396	5	36A10-1396	5	36A11-1396	5
	地面保护 Floor Protection											

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
4"	100	155	34	86	140.5
5"	125	176	38	101.5	147
6"	150	201	44	120	150
8"	200	252	54	155	173

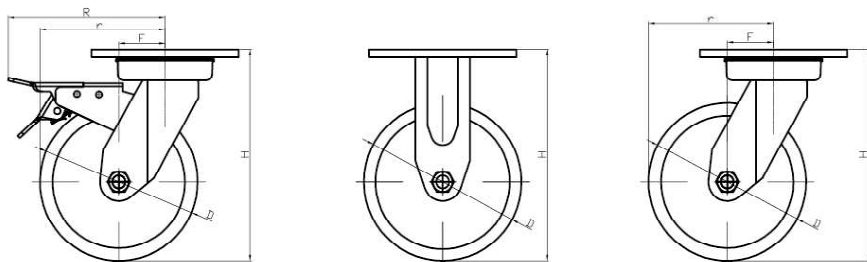

产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 底板7.5mm Thickness of top plate 7.5mm
- 支架6mm Thickness of bracket 6mm
- 底板采用平面压力轴承 Tapered bearing
- 性能优良 Excellent performance
- 抗冲击 Anti shock

选配底板 Optional Plate

