



申牌万向轮
SHENPAI Caster®

医疗行业用轮 Caster for Medical Industry



3"-6"

30-150 Kg

- 常用医用脚轮, 覆盖全塑主架轮, 双轮, 电驱辅助轮。适用于医用设备及病床。产品通过SGS, TUV等认证, 外观, 结构均有自主知识产权。


融合标准



- Commonly used medical casters, covering all plastic main frame wheels, double wheels, electric drive auxiliary wheels. Suitable for medical equipment and hospital beds. The products are certified by SGS, TUV, etc. The appearance and structure have independent intellectual property rights.

25D 系列 S SERIES 中重型(折叠急救病床用) Foldable Ambulance Bed

安装尺寸
Installation Drawing

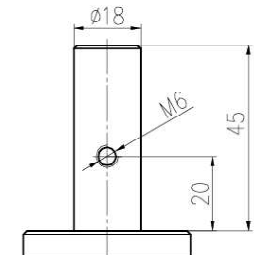

插杆活动/刹车
Stem of Swivel Caster




5-6"
120-150 Kg

	 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	 轮片直径 (inch) Wheel diameter	 轮面宽度 (mm) Tire width	 载重 (kg) Capacity	 插杆固定 Stem rigid caster	 装箱数 PCs /CTN	 插杆活动 Stem swivel caster	 装箱数 PCs /CTN	 插杆刹车 Stem swivel with brake	 装箱数 PCs /CTN
NRNB  运行省力 Rollability 良好 Good 耐磨耐用 Durability 良好 Good 运行静音 Quiet Operation 优秀 Excellent 地面保护 Floor Protection 优秀 Excellent	轮面硬度 Hardness 75±3A	橡胶 Rubber on nylon core	双滚珠 Ball bearing	5"	38	120	25D03-1317	14	25D01-1317	14	25D02-1317	14	
				6"	38	140	25D06-1318	14	25D04-1318	14	25D05-1318	14	
PUPB  运行省力 Rollability 良好 Good 耐磨耐用 Durability 优秀 Excellent 运行静音 Quiet Operation 良好 Good 地面保护 Floor Protection 良好 Good	轮面硬度 Hardness 95±3A	聚氨酯 Polyurethane on plastic core	双滚珠 Ball bearing	5"	38	130	25D03-1373	14	25D01-1373	14	25D02-1373	14	
				6"	38	150	25D06-1374	14	25D04-1374	14	25D05-1374	14	

外形尺寸
Overall Dimensions

尺寸	轮径	插杆全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
5"	125	168	35	98	128
6"	150	195	35	110.5	128

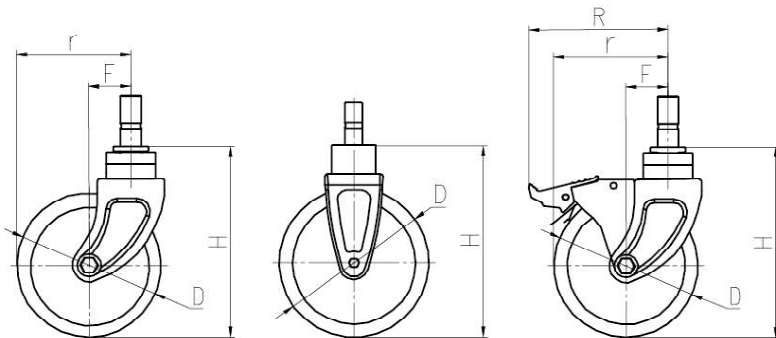

产品特点
Product Features

- 适用于折叠病床
- 脚轮横置后立即停止晃动
- 静音减震
- 电泳支架
- 支架2.5mm
- 可选配φ30插杆
- Suitable for foldable hospital bed
- Anti-waggle design while caster is put down
- Silent running
- Electrophoretic coating
- Thickness of bracket 2.5mm
- Optional stem:φ30

新型插杆设计 自动定位直行



具有自动定位直行功能
It has the function of automatic positioning and straight line


80C

SERIES


塑罩医用轮
Covered Hospital Caster

III
80C


安装尺寸
Installation Drawing



平底活动/刹车底板
Plate of Swivel Caster



丝杆
Threaded Stem



插杆
Stem of Swivel Caster

ABS原料注塑外壳; 冲压钢制主架, 表面蓝白钝化; 精密轴承承载万向。

ABS Injection Molded Shell; Stamping Steel Main Frame, Blue-White Zinc Passivation Surface; Precision Bearing Bearing Universal Bearing.




III
80C

外观、结构均为自主研发, 专利保护
Appearance and structure are researched & developed independently, patented by SHENPAI.

	 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	 轮片直径 (mm) Wheel diameter	 轮面宽度 (mm) Tire width	 载重 (kg) Capacity	 平底活动 Swivel	 平底单功能刹车 Swivel with single function brake	 平底双功能刹车 Swivel with double function brake	 丝杆活动 Threaded stem swivel	 丝杆单功能刹车 Threaded stem swivel with single function brake	 丝杆双功能刹车 Threaded stem swivel with double function brake	 插杆活动 Stem swivel	 插杆单功能刹车 Stem swivel with single function brake	 插杆双功能刹车 Stem swivel with double function brake	
 	运行省力 Rollability	优秀 Excellent	轮面硬度 Hardness 95±3A	聚氨酯 Polyurethane on plastic core	6202zz	100	32	100	80C04-1704	80C05-1704	80C06-1704	80C13-1704	80C14-1704	80C15-1704	80C22-1704	80C23-1704	80C24-1704
耐磨耐用 Durability	优秀 Excellent	125				32	125	80C07-1705	80C08-1705	80C09-1705	80C16-1705	80C17-1705	80C18-1705	80C25-1705	80C26-1705	80C27-1705	
运行静音 Quiet Operation	优秀 Excellent																
地面保护 Floor Protection	优秀 Excellent																
 	运行省力 Rollability	良好 Good	轮面硬度 Hardness 80A	人造胶 Thermoplastic elastomer on plastic core	6202zz	100	32	100	80C04-1594	80C05-1594	80C06-1594	80C13-1594	80C14-1594	80C15-1594	80C22-1594	80C23-1594	80C24-1594
耐磨耐用 Durability	一般 Average	125				32	125	80C07-1595	80C08-1595	80C09-1595	80C16-1595	80C17-1595	80C18-1595	80C25-1595	80C26-1595	80C27-1595	
运行静音 Quiet Operation	优秀 Excellent																
地面保护 Floor Protection	优秀 Excellent																

外形尺寸
Overall Dimensions

轮径 Wheel diameter	平底全高 Height	丝杆全高 Threaded stem height	插杆全高 Insert stem height	偏心距 Eccentricity	旋转半径 Turning radius	刹车 旋转半径 Brake turing radius
100	144	142	134	30	80	105
125	180	188	167	38	100	132

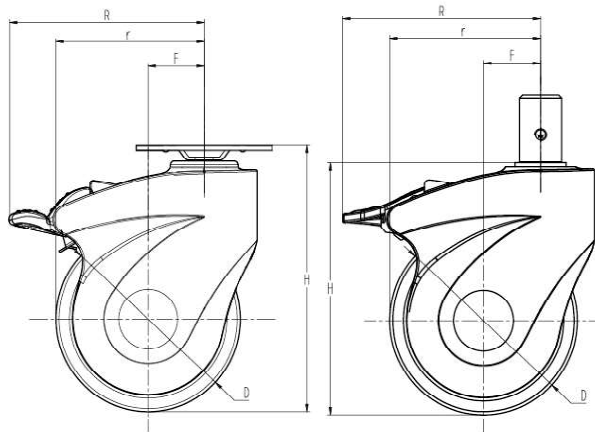

I
80C

80T 系列 SERIES 医用双轮 Twin-wheel Medical Caster

III
80T

高强尼龙加长玻纤合成主架, TPR、TPU轮面适用于设备、病床装配, 主轴承确保万向灵活、高承载, 双轮采用软、硬双刹, 确保运行与静止状态下安全效果。


With high-strength nylon lengthened glass fiber synthetic main frame, TPR or TPU wheel surface is suitable for equipment and hospital bed assembly, spindle double bearings ensure universal flexibility and high load-bearing, double wheels use soft and hard double brakes to ensure safe operation and static state.




外观、结构均为自主研发, 专利保护




安装尺寸 Installation Drawing



平底活动/ 刹车底板
Plate of Swivel Caster



丝杆
Threaded Stem




插杆
Stem of Swivel Caster

轮面材质 Wheel material	轮面硬度 Tire hardness	轴承 Bearing	轮径 (mm) Wheel diameter	轮宽 (mm) Tire width	载重 (kg) Capacity	平底活动 Swivel	平底刹车 Swivel with brake	丝杆活动 Threaded stem swivel	丝杆刹车 Threaded stem swivel with brake	插杆活动 Grip ring stem swivel	插杆刹车 Grip ring stem swivel with brake
聚氨酯 Polyurethane on plastic core	95A°	6201zz	100	18	100	80T03-1695	80T04-1695	80T21-1695	80T22-1695	80T15-1695	80T16-1695
			125	18	130	80T05-1696	80T06-1696	80T23-1696	80T24-1696	80T17-1696	80T18-1696
人造胶 Thermoplastic elastomer on plastic core	80A°	6201zz	100	18	50	80T03-1747	80T04-1747	80T21-1747	80T22-1747	80T15-1747	80T16-1747
			125	18	80	80T05-1748	80T06-1748	80T23-1748	80T24-1748	80T17-1748	80T18-1748

外形尺寸 Overall Dimensions

轮径 Wheel diameter	平底全高 Height	丝杆全高 Threaded stem height	插杆全高 Insert stem height	偏心距 Eccentricity	旋转半径 Turning radius	刹车 旋转半径 Brake turning radius
100	125.5	123	115	30	80	108
125	155.5	155	145	37.5	100	135

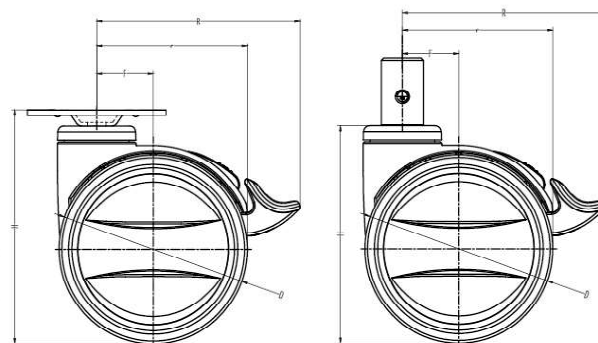

80N 系列 SERIES 尼龙主架轮 Nylon Body Caster


III
80N

高强尼龙加长玻纤合成主架, TPR轮面软硬适中、静音运行, 主轴承配置精密轴承承载万向。


Main frame is made of high strength nylon lengthened glass fiber and TPR wheel is neither too hard nor too soft. It runs silently, the spindle is equipped with precision bearing for universal loading.



安装尺寸 Installation Drawing



平底活动/ 刹车底板
Plate of Swivel Caster



丝杆
Threaded Stem



可选配
灰色支架产品
Optional
grey support
products

轮面材质 Wheel material	轮面硬度 Tire hardness	轴承 Bearing	轮径 (mm) Wheel diameter	轮宽 (mm) Tire width	载重 (kg) Capacity	平底活动 Swivel	平底刹车 Swivel with brake	丝杆活动 Threaded stem swivel	丝杆刹车 Threaded stem swivel with brake
聚氨酯 Polyurethane on plastic core	95A°	6202zz	75	25	30	80N01-1703	80N02-1703	80N10-1703	80N11-1703
			100	32	80	80N04-1704	80N05-1704	80N13-1704	80N14-1704
人造胶 Thermoplastic elastomer on plastic core	80A°	6202zz	75	25	30	80N01-1698	80N02-1698	80N10-1698	80N11-1698
			100	32	80	80N04-1594	80N05-1594	80N13-1594	80N14-1594

外形尺寸 Overall Dimensions

轮径 Wheel diameter	平底全高 Height	丝杆全高 Threaded stem height	偏心距 Eccentricity	旋转半径 Turning radius	刹车 旋转半径 Brake turning radius
75	114	114	24	61.5	84
100	152	152	32	82	112

