

全国质量投诉电话 : 8008287707

江阴市申牌万向轮有限公司

JIANGYIN CITY SHENPAI CASTER CO., LTD.

地址: 江苏省江阴市璜土工业园区
Add: Huangtu Development area,
Jiangyin, Jiangsu, China
电话(Tel): 0510-6651617 6650803
传真(Fax): 0510-6656653
邮编(P.C.): 214445
Http: www.shenpai.com
E-mail: shenpai@shenpai.com

申® 万向轮
CASTER



中国·江苏
JIANGSU CHINA

Jiangyin city Shenpai Caster co.,ltd.

公司简介

江阴申牌万向轮有限公司是专业生产“申牌”脚轮的制造商，位于江阴璜土工业园内，紧邻江苏常州港和沪宁高速公路。公司创建于1993年，经过十余年的积累，已形成一整套生产、研发、销售和服务体系。

公司占地面积26000平方米，现有员工150多人，主要产品为美式、日式脚轮，欧式脚轮正在研发过程中。公司已通过ISO9001:2000国际质量体系认证。产品畅销国内外市场。在国内大部分城市都拥有代理销售处，能为客户提供便捷、全面的服务，在国际市场上，公司于2003年开发出的高耐磨压铸聚氨脂轮，优质弹力橡胶轮受到了美国与日本客户的青睐。现已与丰田通商、雅马哈等公司配套，并与日本脚轮制造商协作，现已正常运行。

公司技术不断改进，近年设备基础大量投入，扩大生产规模，提高生产率，满足国内市场的同时，积极开拓国际市场。公司本着质优价廉的原则服务于客户，竭诚欢迎国内外朋友莅临公司参观、商洽，共创美好前程！

Brief Introduction

Jiangyin city Shenpai caster CO.,LTD. is specializing in production of all kinds of casters. It is situated in Huangtu Development area. It lies to Jiangsu Changzhou Port and the Shanghai-Nanjing Expressway. The company founded in 1993, with accumulating more than ten years' experience. It has formed a complete system in production, development, sales and service.

The company covers an area of 26000 square meters and possesses more than 150 workers. The main types of caster are American type and Japanese type. The European type is developing. The company has passed through authentication of ISO9001:2000 Quality Assurance System. The product has been sold in the market at home and abroad. The company has set up the sales agents in many cities in China, providing a rapid and overall services. In international market, we have developed Ammonia fat wheel of high wear-resisting die casting and Rubber wheel of high-quality elasticity in 2003. They are received favourable comments from clients in American and Japanese. At present, the company has been established cooperative relation with YAMAHA and TOYOTA Tsusho, cooperated with Japanese caster maker now.

Company's technology is updated, foundations of equipment to put one's back into in a large amount this years, expand the scale, boost productivity, meet domestic market demand, explore world market.

In conformity with the principle of super-quality and low price, we insist on serving for clients. Welcome all friends to our company for visiting and negotiation. We would like to create a brilliant future with you!

brilliant future

Caster


favourable




申牌万向轮




所选的轴承 Selective bearing

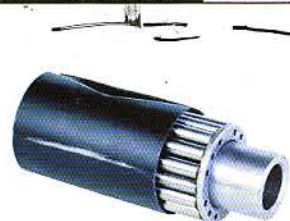

滚针轴承
needle bearing



滚针轴承
needle bearing



滚珠轴承
Ball bearing



封闭式滚珠轴承
enclosed type
ball bearing

各种单轮 Various wheels



尼龙叉车轮
Nylon Forklift



聚氨酯轮
Polyurethane



橡塑轮
Polythene



尼龙轮
Nylon



人造胶轮
Artificial rubber




聚氨酯轮
Polyurethane



聚氨酯轮
Polyurethane



尼龙轮
Nylon

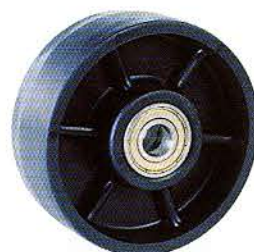

尼龙叉车轮
Nylon Forklift



聚氨酯轮
Polyurethane



铁芯聚氨酯轮
Iron-core
polyurethane



钢板芯聚氨酯轮
Steel plate-core
polyurethane



钢板芯橡胶轮
Steel plate-core
rubber



铝芯橡胶轮
Aluminium-
core rubber




铝芯聚氨酯轮
Aluminium-core
Polyurethane



铁芯聚氨酯轮
Iron-core
polyurethane

各种刹车脚轮 Various brake casters


Casters

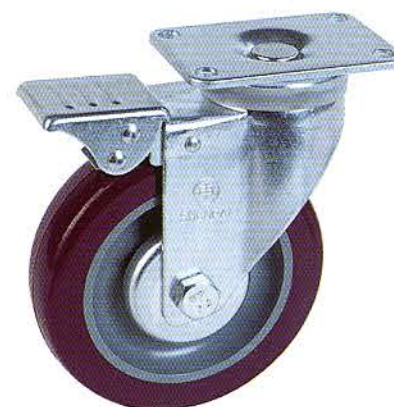

11-***-01B



11-***-01BA

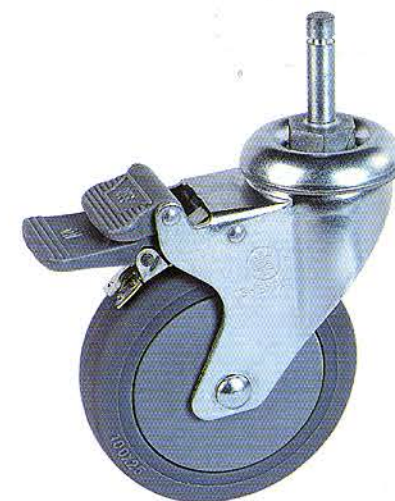

14-***-07BU




21-***-06B



22-***-08B



31-***-01B

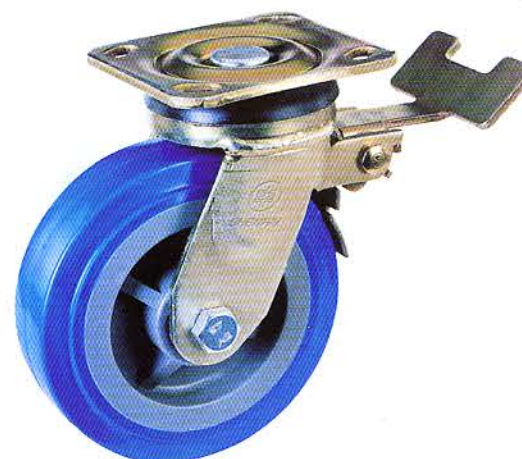

31-***-01BA



23-***-06B



T31-***-01B



轻型 平板 - 万向 / 万向刹车 - 尼龙 / 聚氨脂
Light flat-universal/universal brake-Nylon / Polyurethane



11-***-01B

11-***-02

● 载重范围 20-150kg ● load range 20-150kg

单轮材料 material	mm diameter	mm width	kg load	型号 Model Number		轴承 bearing	mm height	mm partial	mm baseplate	mm bore hole diameter	mm bore hole spacing aperture
				万向式 universal	万向刹制式 universal brake						
聚氨脂 Polyurethane	38	20	20	11-038-01	4.6	滑动 glide	55	20	55x38	44x27	M5
	53	25	50	11-053-01	8.1	滚针 needle	72	26	70x59	54x42	7
	63	25	60	11-063-01	9.3		85	28			
	76	30	80	11-076-01	14.1		108	36			
	88	32	100	11-088-01	14.3	滚针 / 滚珠 needle/ball	120	38	92x64	75x45	9
	102	32	125	11-102-01	15.7		135	40			
	127	32	125	11-127-01	18.1		160	42			
尼龙 Nylon	38	20	20	11-038-02	4.9	滑动 glide	55	20	55x38	44x27	M5
	53	25	60	11-053-02	7.8	滚针 needle	72	26	70x59	54x42	7
	63	25	80	11-063-02	9		85	28			
	76	30	100	11-076-02	12.5		108	36			
	88	32	120	11-088-02	13.6	滚针 / 滚珠 needle/ball	120	38	92x64	75x45	9
	102	32	140	11-102-02	15		135	40			
	127	32	150	11-127-02	17.1		160	42			



轻型 平板 - 万向 / 万向刹车 - 橡塑 / 人造胶
Light flat-universal/universal brake-Polythene/Artificial rubber



11-***-03B


11-***-03

● 载重范围 30-95kg ● load range 30-95kg


单轮材料 material	mm diameter	mm width	kg load	型号 Model Number		轴承 bearing	mm height	mm partial	mm baseplate	mm bore hole diameter	mm bore hole spacing aperture
				万向式 universal	万向刹制式 universal brake						
橡塑 Polythene	53	25	30	11-053-03	7.8	滚针 needle	72	26	70x59	54x42	7
	63	25	40	11-063-03	10		85	28			
	76	30	55	11-076-03	10.8		108	36			
	88	32	70	11-088-03	12.2	滚针 / 滚珠 needle/ball	120	38	92x64	75x45	9
	102	32	85	11-102-03	13.8		135	40			
	127	32	95	11-127-03	15.8		160	42			
	53	25	30	11-053-07	8.5	滚针 needle	72	26	70x59	54x42	7
人造胶 Artificial rubber	63	25	40	11-063-07	10.8		85	28			
	76	30	55	11-076-07	12.2		108	36			
	88	32	70	11-088-07	14.7	滚针 / 滚珠 needle/ball	120	38	92x64	75x45	9
	102	32	85	11-102-07	15.8		135	40			
	127	32	95	11-127-07	19		160	42			



轻型 平板 - 定向 - 尼龙 / 聚氨脂 / 橡塑 / 人造胶
Light flat-directional- Nylon/Polyurethane/Polythene/Artificial rubber

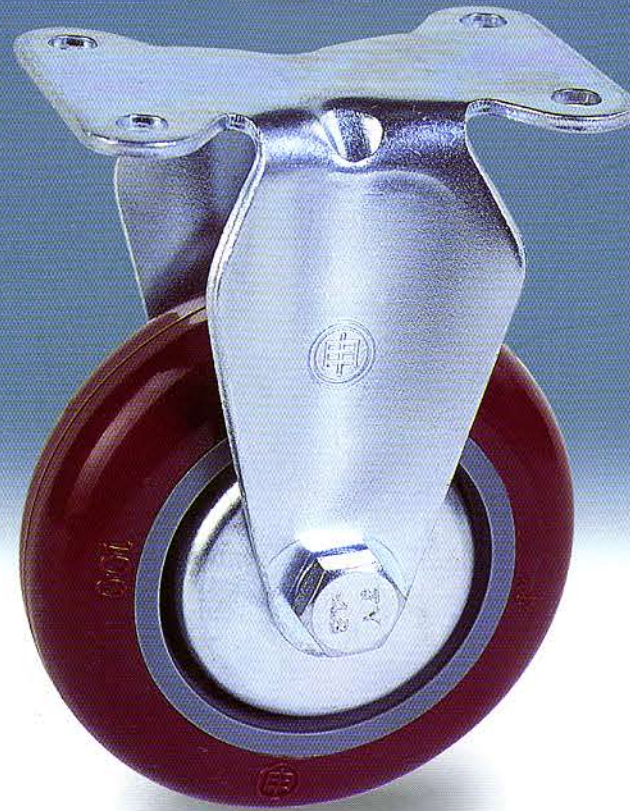

12-***-01

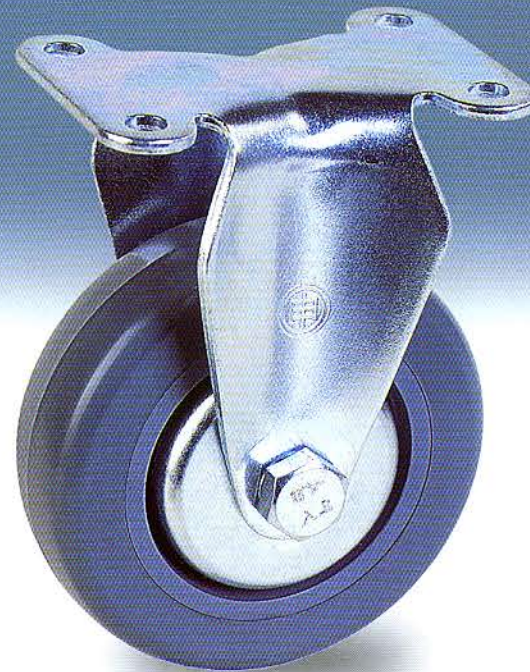

12-***-03

● 载重范围 40-150kg ● load range 40-150kg


单轮材料 material	mm diameter	mm width	kg load	型号 Model Number	轴承 bearing	mm 全高 height	mm 底板 baseplate	mm 孔径 bore hole diameter	mm 孔径 bore hole spacing aperture
				定向式 directional					
聚氨脂 Polyurethane	63	25	60	12-063-01	滚针 needle	85	86x53	71x38	7
	76	30	80	12-076-01		108			
	88	32	100	12-088-01		120			
	102	32	125	12-102-01		135			
尼龙 Nylon	63	25	80	12-063-02	滚针 / 滚珠 needle / ball	85	86x53	71x38	7
	76	30	100	12-076-02		108			
	88	32	120	12-088-02		120			
	102	32	140	12-102-02		135			
人造胶 Artificial rubber	63	25	40	12-063-07	滚针 needle	85	86x53	71x38	7
	76	30	55	12-076-07		108			
	88	32	70	12-088-07		120			
	102	32	85	12-102-07		135			
橡塑 Polythene	63	25	40	12-063-03	滚针 / 滚珠 needle / ball	85	86x53	71x38	7
	76	30	55	12-076-03		108			
	88	32	70	12-088-03		120			
	102	32	85	12-102-03		135			



轻型 丝杆 - 万向 / 万向刹车 - 尼龙 / 聚氨脂
Light silk pole-universal/universal brake-Nylon/Polyurethane



13-***-01B

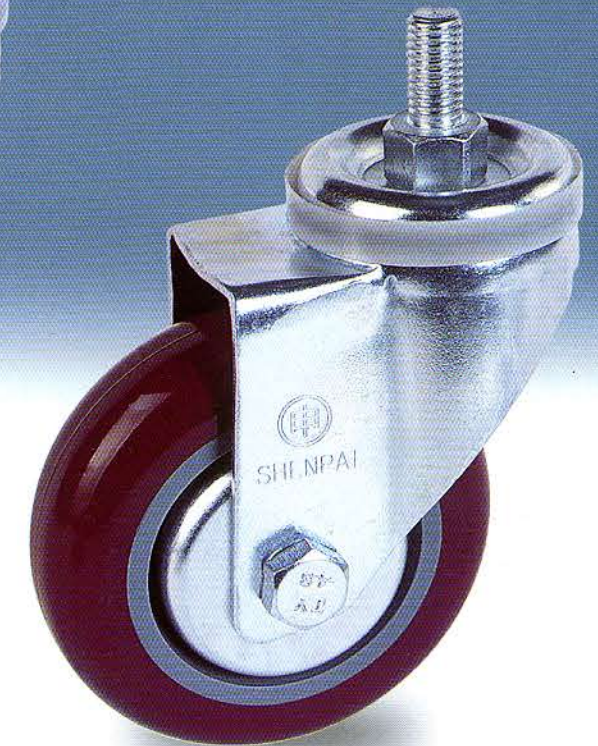


13-***-02

● 载重范围 50-125kg ● load range 50-125kg

单轮材料 material	mm diameter	mm width	kg load	型号 Model Number	轴承 bearing	mm 全高 height	mm 偏心 partial	mm 螺杆长 screw length	mm 螺纹直径 screw thread diameter
				万向式 universal					
聚氨脂 Polyurethane	53	25	50	13-053-01	滚针 needle	78	26	22	M12 (M16)
	63	25	60	13-063-01		88			
	76	30	80	13-076-01		111			
	88	32	100	13-088-01		122			
尼龙 Nylon	102	32	125	13-102-01	滚针 / 滚珠 needle / ball	138	40	25	M12 (M16)
	127	32	125	13-127-01		163			
	53	25	50	13-053-02		78			
	63	25	60	13-063-02		88			
	76	30	80	13-076-02	滚针 needle	111	36	25	M12 (M16)
	88	32	100	13-088-02		122			
	102	32	125	13-102-02		138			
	127	32	125	13-127-02		163			



轻型 丝杆 - 万向 / 万向刹车 - 橡胶 / 人造胶
Light silk pole-universal/universal brake-Rubber/Artificial rubber

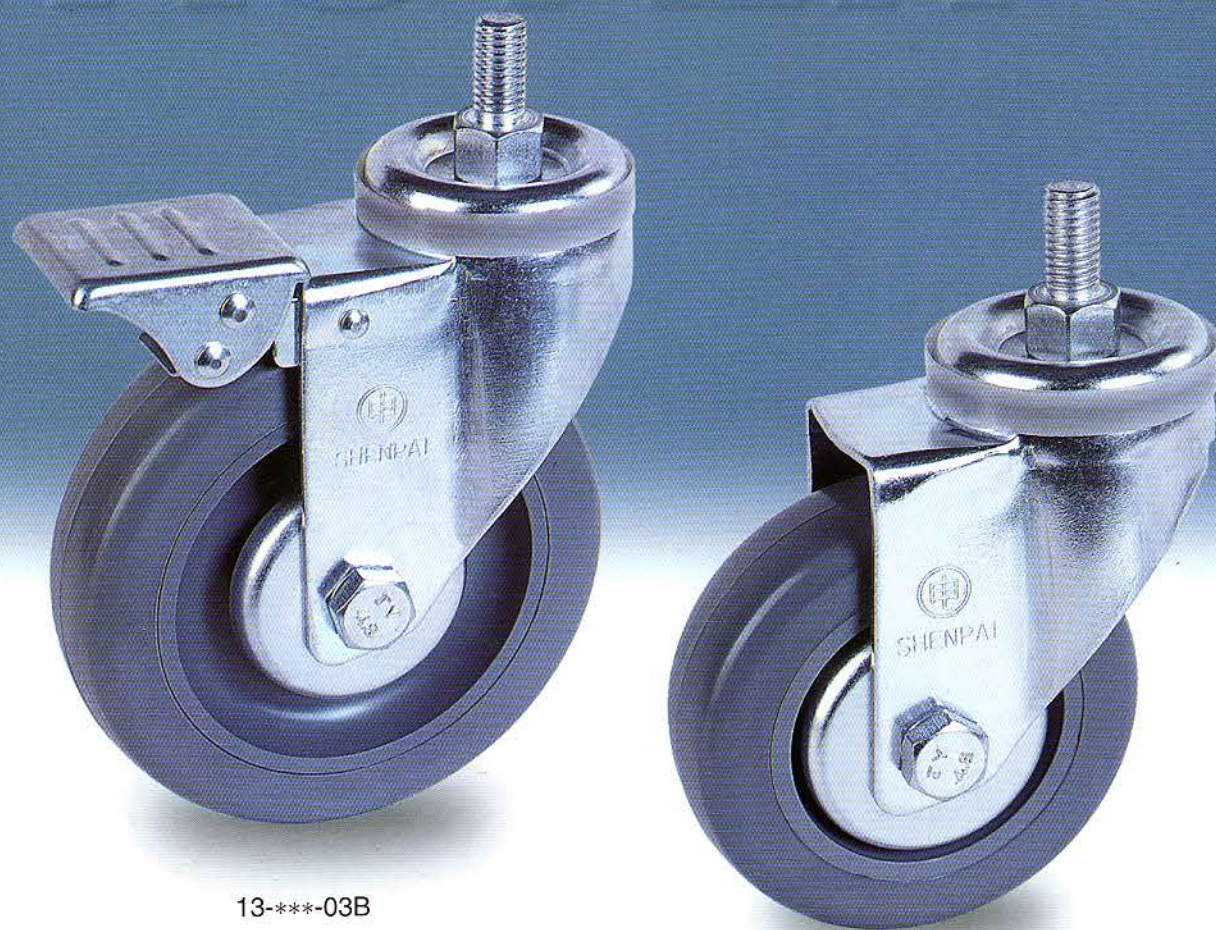


13-***-03B

● 载重范围 30-95kg ● load range 30-95kg

				型号							
	mm	mm	kg	Model	Number		mm	mm	mm	mm	
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	螺杆长 screw length	螺纹直径 screw thread diameter	
橡塑 Polythene	53	25	30	13-053-03	13-053-03B	滚针 needle	78	26	22	M12 (M16)	
	63	25	40	13-063-03	13-063-03B		88	28			
	76	30	55	13-076-03	13-076-03B		111	36			
	88	32	70	13-088-03	13-088-03B		122	38			
	102	32	85	13-102-03	13-102-03B	滚针 / 滚珠 needle / ball	138	40	25		
	127	32	95	13-127-03	13-127-03B		163	42			
人造胶 Artificial rubber	53	25	30	13-053-07	13-053-07B	滚针 needle	78	26	22		M12 (M16)
	63	25	40	13-063-07	13-063-07B		88	28			
	76	30	55	13-076-07	13-076-07B		111	36			
	88	32	70	13-088-07	13-088-07B		122	38			
	102	32	85	13-102-07	13-102-07B	滚针 / 滚珠 needle / ball	138	40	25		
	127	32	95	13-127-07	13-127-07B		163	42			



轻型 插杆 - 万向 / 万向刹车 - 聚氨脂 / 尼龙 / 橡胶 / 人造胶
Light insert pole-universal/universal brake- Polyurethane/Nylon/Rubber/Artificial rubber

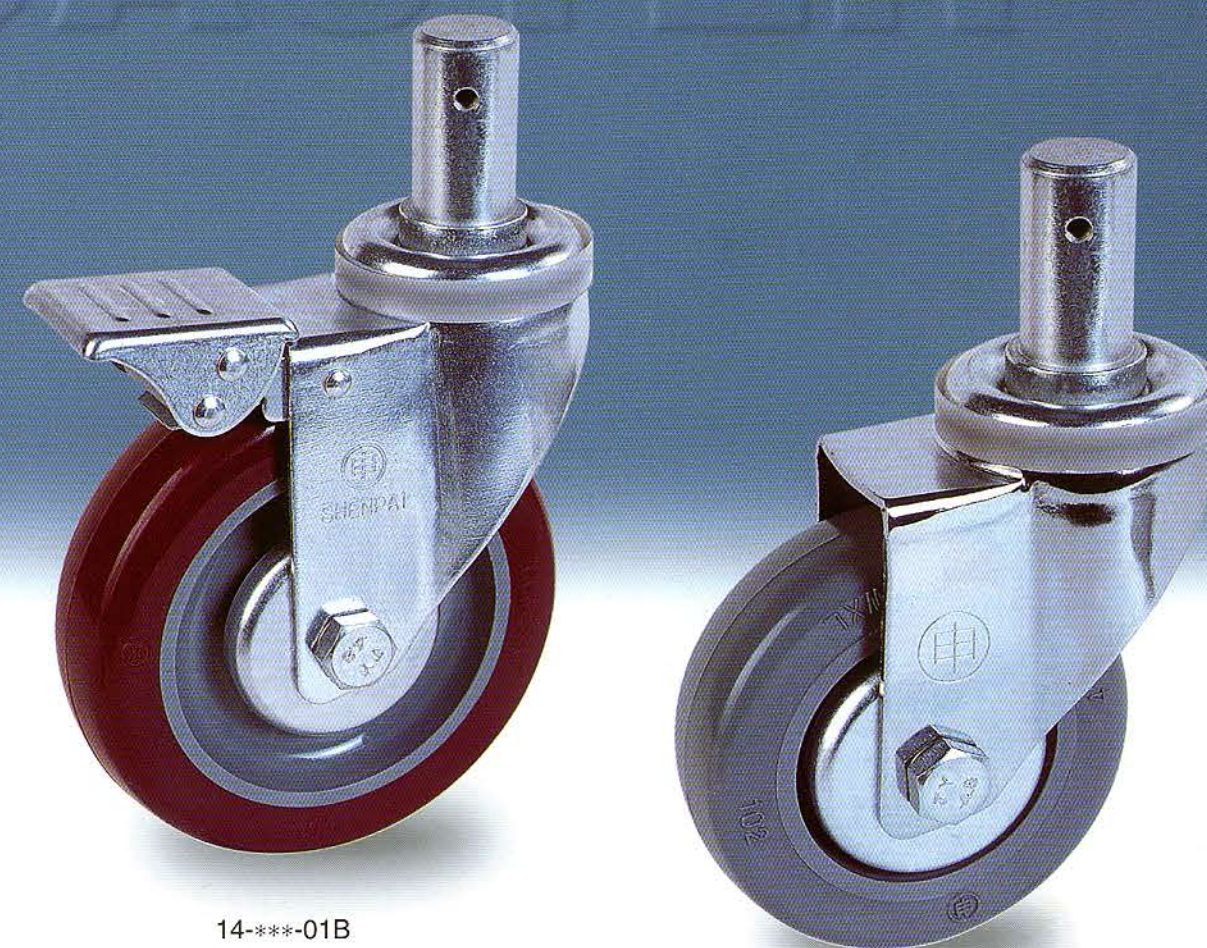


14-***-01B

● 载重范围 70-125kg ● load range 70-125kg

				型号						
				Model	Number					
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	轴高 bearing height	轴径 bearing diameter
聚氨脂 Polyurethane	88	32	100	14-088-01	14-088-01B	滚针 needle	120	38	40	20
	102	32	125	14-102-01	14-102-01B		135	40		
	127	32	125	14-127-01	14-127-01B		160	42		
	127	32	125	14-127-02	14-127-02B		160	42		
尼龙 Nylon	88	32	100	14-088-02	14-088-02B	滚针 / 滚珠 needle / ball	120	38	40	20
	102	32	125	14-102-02	14-102-02B		135	40		
	127	32	125	14-127-02	14-127-02B		160	42		
	127	32	125	14-127-03	14-127-03B		160	42		
橡塑 Polythene	88	32	70	14-088-03	14-088-03B	滚针 needle	120	38	40	20
	102	32	85	14-102-03	14-102-03B		135	40		
	127	32	95	14-127-03	14-127-03B		160	42		
	127	32	95	14-127-07	14-127-07B		160	42		
人造胶 Artificial rubber	88	32	70	14-088-07	14-088-07B	滚针 needle	120	38	40	20
	102	32	85	14-102-07	14-102-07B		135	40		
	127	32	95	14-127-07	14-127-07B		160	42		
	127	32	95	14-127-07	14-127-07B		160	42		



轻型 平板 - 定向 / 万向刹车 - 聚氨脂 / 人造胶 (A 式)
Light flat-directional/universal brake- Polyurethane/Artificial rubber(A type)

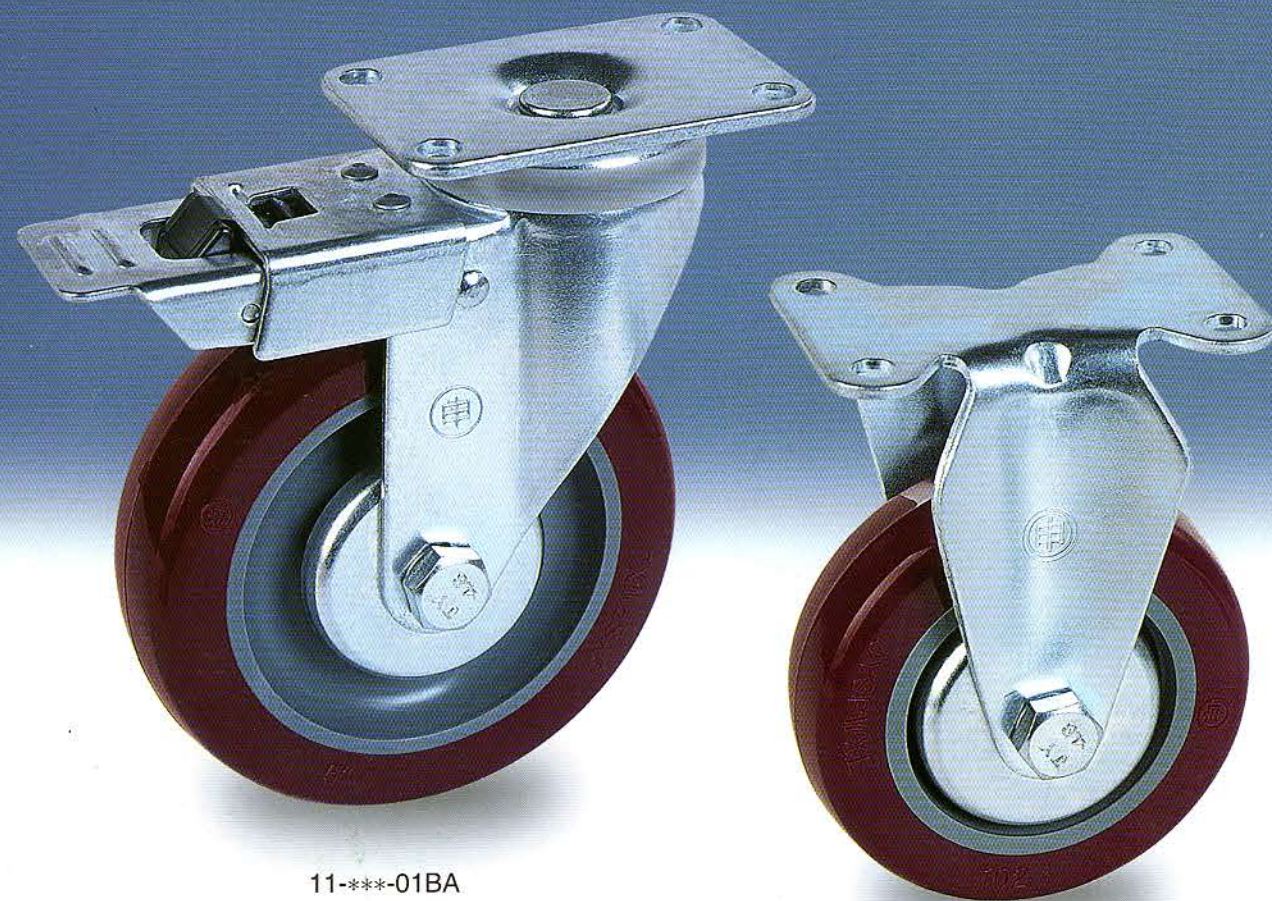

11-***-01BA


12-***-01A

● 载重范围 55-125kg ● load range 55-125kg

				型号							
				Model	Number						
单轮材料 material	轮径 diameter	轮宽 width	载重 load	定向式 directional	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔径 bore hole diameter	孔径 bore hole spacing aperture
聚氨脂 Polyurethane	76	30	80	12-076-01A 12.4	11-076-01BA 16.5	滚针 needle	112	36	定向底板尺寸: directional baseplate size: 95x65	75x45	9
	88	32	100	12-088-01A 12.9	11-088-01BA 17.0	滚针 / 滚珠 needle / ball	122	38			
	102	32	125	12-102-01A 13.7	11-102-01BA 18.5		138	40			
	127	32	125	12-127-01A 16	11-127-01BA 20.9		163	42			
人造胶 Artificial rubber	76	30	55	12-076-07A 13.6	11-076-07BA 18	滚针 needle	112	36	万向底板尺寸: universal baseplate size: 92x64		
	88	32	70	12-088-07A 14.2	11-088-07BA 18.5	滚针 / 滚珠 needle / ball	122	38			
	102	32	85	12-102-07A 14.9	11-102-07BA 20		138	40			
	127	32	95	12-127-07A 17.4	11-127-07BA 22.5		163	42			



轻型 丝杆 / 插杆 - 万向 / 万向刹车 - 人造胶 / 聚氨脂 (A 式)
Light silk pole/insert pole-universal/universal brake- Artificial rubber/Polyurethane(A type)

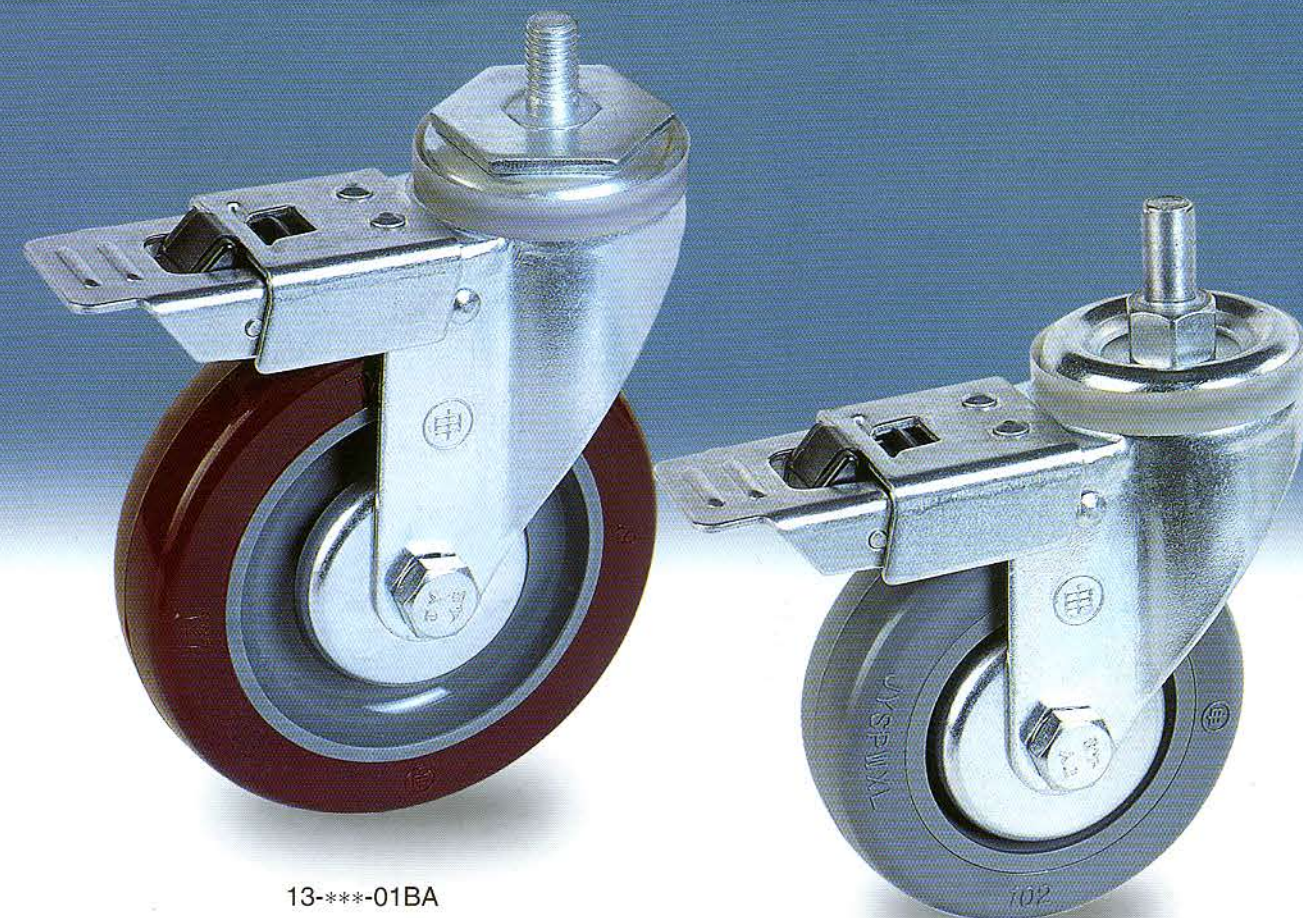

13-***-01BA


14-***-07BA

● 载重范围 55-125kg ● load range 55-125kg

				型号						
				Model	Number					
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	轴高 bearing height	轴径 bearing diameter
聚氨脂 Polyurethane	76	30	80	13-076-01A 14.3	13-076-01BA 17	滚针 needle	112	36	M12X25	(φ 24X45)
	88	32	100	13-088-01A 14.4	13-088-01BA 17.7	滚针 / 滚珠 needle / ball	122	38		
	102	32	125	13-102-01A 15.9	13-102-01BA 19.1		138	40		
	127	32	125	13-127-01A 18.2	13-127-01BA 21.5		163	42		
人造胶 Artificial rubber	76	30	55	13-076-07A 15.6	13-076-07BA 18	滚针 needle	112	36		
	88	32	70	13-088-07A 15.8	13-088-07BA 18.5	滚针 / 滚珠 needle / ball	122	38		
	102	32	85	13-102-07A 17.3	13-102-07BA 20		138	40		
	127	32	95	13-127-07A 19.8	13-127-07BA 22.5		163	42		



轻型 丝杆 / 插杆 - 万向 / 万向刹车 - 人造胶 / 聚氨脂 (U 式)
Light silk pole/insert pole-universal/universal brake- Artificial rubber / Polyurethane (U type)

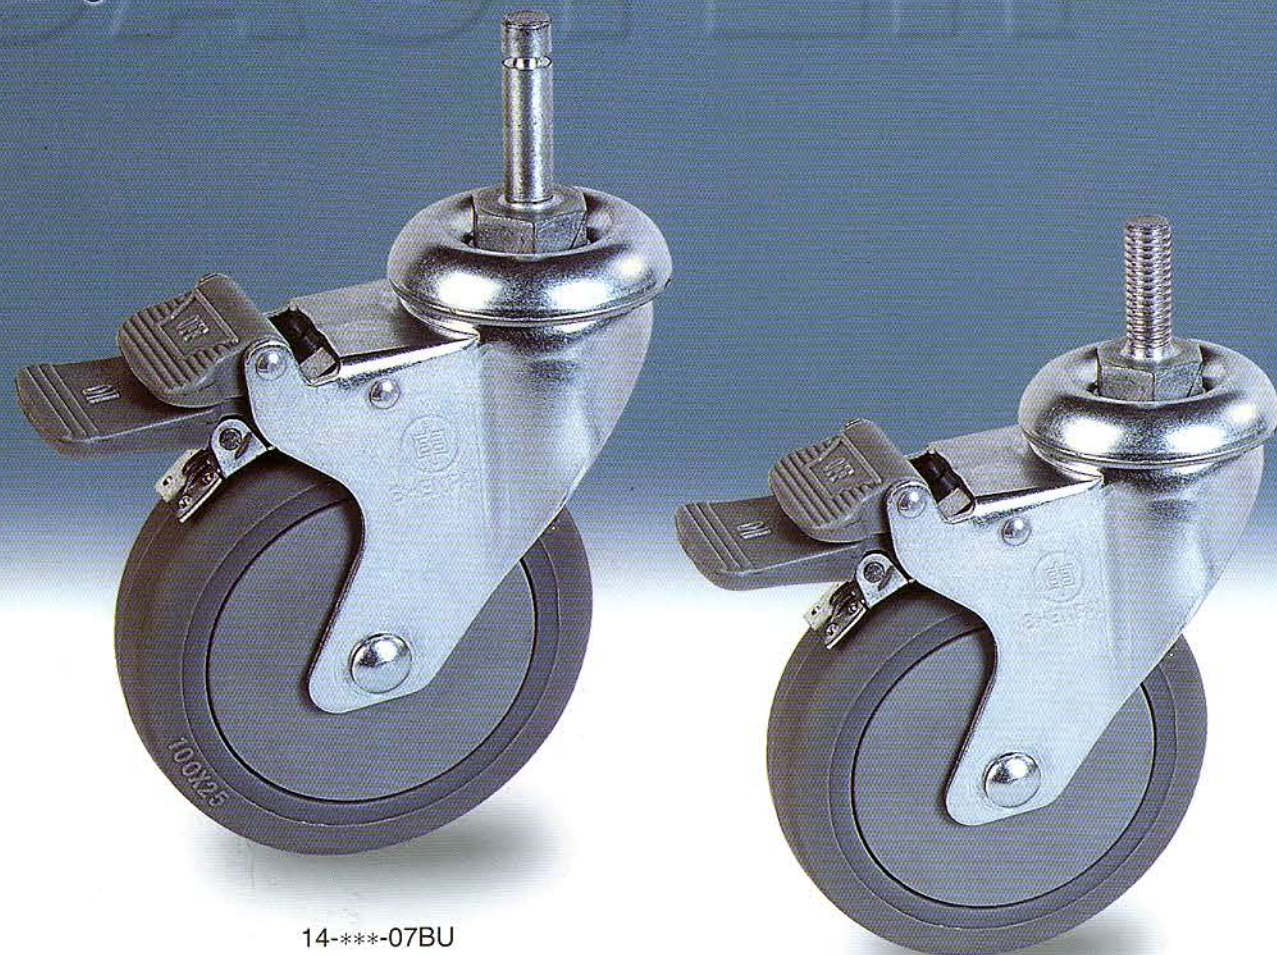

14-***-07BU


13-***-07BU

● 载重范围 30-50kg ● load range 30-50kg

				型号						
	mm	mm	kg	Model Number			mm	mm	mm	mm
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	轴高 bearing height	轴径 bearing diameter
人造胶 Artificial rubber	50	20	30	13-050-07U 15.6		滚珠 ball	72	21	M12X25	
	75	25	35	13-075-07U 15.8	13-075-07BU 18		110	38		
	100	25	40	13-100-07U 17.3	13-100-07BU 20		135	40		
	125	25	45	13-125-07U 19.8	13-125-07BU 22.5		160	42		
聚氨脂 Polyurethane	50	20	30	13-050-01U 14.8			72	21	(ϕ 11X20)	(M12X15)
	75	25	35	13-075-01U 15	13-075-01BU 17.1		110	38	(ϕ 12X25)	
	100	25	45	13-100-01U 15.7	13-100-01BU 19.1		135	40		
	125	25	50	13-125-01U 18.2	13-125-01BU 21.5		160	42		



轻型 顶孔 - 万向 / 万向刹车 - 聚氨脂 / 尼龙 / 橡塑 / 人造胶
Light tophole-universal / universal brake-polyurethane / Nylon / polythene / Artificial rubber

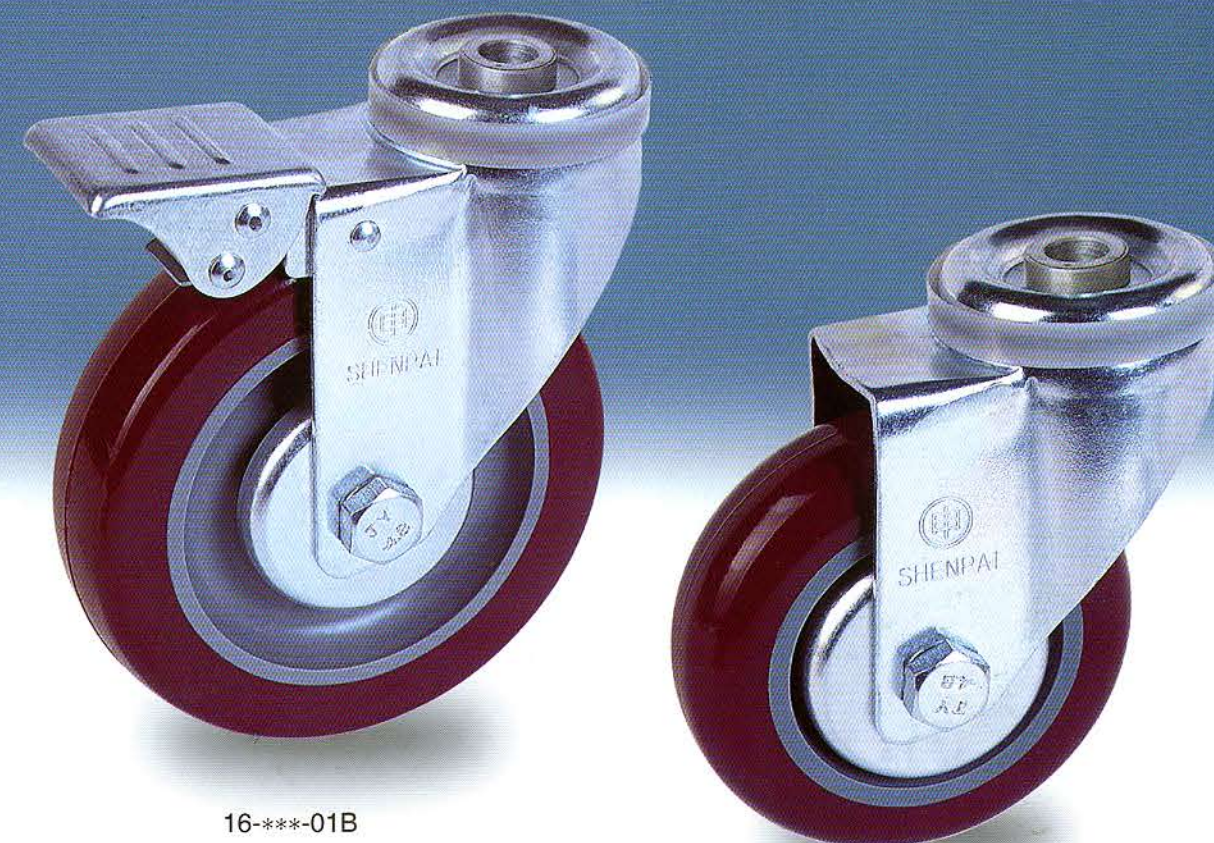

16-***-01B

16-***-02

● 载重范围 55-150kg ● load range 55-150kg

单轮材料 material	轮径 diameter mm	轮宽 width mm	载重 load kg	型号 Model Number		轴承 bearing	全高 height mm	偏心 partial mm	孔径 bore hole spacing aperture mm
				万向式 universal	万向刹制式 universal brake				
聚氨脂 Polyurethane	76	30	80	16-076-01	16-076-01B 16.5	滚针 / 滚珠 needle/ball	104	36	ϕ 12.5
	88	32	100	16-088-01	16-088-01B 17.1		115	38	
	102	32	125	16-102-01	16-102-01B 18.5		130	40	
	127	32	125	16-127-01	16-127-01B 20.9		155	42	
尼龙 Nylon	76	30	100	16-076-02	16-076-02B 16.2		104	36	
	88	32	120	16-088-02	16-088-02B 17.1		115	38	
	102	32	140	16-102-02	16-102-02B 18.4		130	40	
	127	32	150	16-127-02	16-127-02B 20.9		155	42	
橡塑 Polythene	76	30	55	16-076-03	16-076-03B 14.1		104	36	
	88	32	70	16-088-03	16-088-03B 15.8		115	38	
	102	32	85	16-102-03	16-102-03B 17.7		130	40	
	127	32	95	16-127-03	16-127-03B 20		155	42	
人造胶 Artificial rubber	76	30	55	16-076-07	16-076-07B 18		104	36	
	88	32	70	16-088-07	16-088-07B 18.5		115	38	
	102	32	85	16-102-07	16-102-07B 20		130	40	
	127	32	95	16-127-07	16-127-07B 22.5		155	42	



中型 平板 - 万向 / 万向刹车 - 橡胶
Medium-sized flat-universal/universal brake-Rubber




21-***-06

21-***-06B

- 轮辐用钢板冲压成型，轮胎采用优质橡胶，弹性好，行走轻便安静
- 支架采用大直径空心铆接，强度高
- 载重范围 80-250kg

- The spoke of a wheel pressess but shaping with the stencil plate, the tire adopts the high-quality rubber, the elasticity is good, walk lightly quietly.
- The support adopts the large diameter to river hollowly, the intensity is good.
- load range 80-250kg

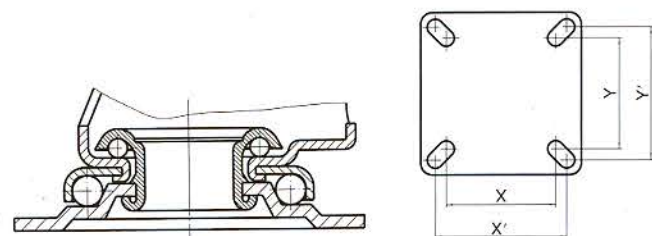

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter		孔径 bore hole spacing aperture
				万向式 universal	万向刹制式 universal brake					XxY	X' xY'	
优质橡胶 Quality Rubber	75	32	80	21-075-06	21-075-06B	滚珠 ball	101	30	82x82	63x63	63x63	9.5
	100	38	130	21-100-06	21-100-06B		144	35	97x97	67x67	74x74	
	130	40	180	21-130-06	21-130-06B		172	38	110x110	75x75	90x90	11
	150	43	200	21-150-06	21-150-06B		197	40	120x120	75x75	90x90	
	200	45	250	21-200-06	21-200-06B		250	58	140x140	100x100	115x115	12



中型 平板 - 定向 / 定向刹车 - 橡胶
Medium-sized flat-directional / directional brake-rubber




22-***-06

22-***-06B

- 轮辐用钢板冲压成型，轮胎采用优质橡胶，弹性好，行走轻便安静
- 载重范围 80-250kg

- The spoke of a wheel pressess but shaping with the stencil plate, the tire adopts the high-quality rubber, the elasticity is good, walk lightly quietly.
- load range 80-250kg

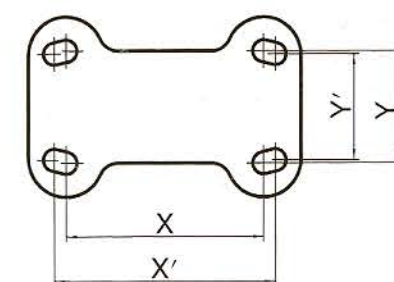

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	底板 baseplate	孔距 bore hole diameter		孔径 bore hole spacing aperture
				定向式 directional	定向刹制式 directional brake				XxY	X' xY'	
优质橡胶 Quality Rubber	75	32	80	22-075-06	22-075-06B	滚珠 ball	101	95x72	63x40	63x40	9.5
	100	38	130	22-100-06	22-100-06B		144	120x82	80x45	90x50	
	130	40	180	22-130-06	22-130-06B		172	138x90	100x56	112x53	11
	150	43	200	22-150-06	22-150-06B		197	138x90	100x56	112x53	
	200	45	250	22-200-06	22-200-06B		250	152x103	112x63	119x56	11.5



中型 平板 - 万向 / 万向刹车 - 聚氨酯
Medium-sized flat-universal / universal brake- Polyurethane




21-***-08B

- 轮辐用钢板冲压成型，轮胎采用优质聚氨酯浇铸，高耐磨，行走轻便安静
- 支架采用大直径空心铆接，强度高
- 载重范围 100-350kg

- The spoke of a wheel pressess but shaping with the stencil plate, the tire adopts the high-quality polyurethane, it is high wear-resisting, walk lightly quietly.
- The support adopts the large diameter to river hollowly, the intensity is good.
- load range 100-350kg

21-***-08

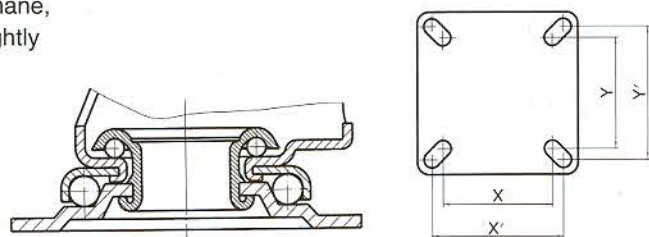

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔径 bore hole diameter		孔径 bore hole spacing aperture
				万向式 universal	万向刹制式 universal brake					XxY	X' xY'	
优质聚氨酯 Quality Polyurethane	75	32	100	21-075-08	21-075-08B	滚珠 ball	101	30	82x82	63x63	63x63	9.5
	100	32	200	21-100-08	21-100-08B		144	35	97x97	67x67	74x74	
	130	35	280	21-130-08	21-130-08B		172	38	110x110	75x75	90x90	11
	150	38	320	21-150-08	21-150-08B		197	40	120x120	75x75	90x90	
	200	42	350	21-200-08	21-200-08B		250	58	140x140	100x100	115x115	12



中型 平板 - 定向 / 定向刹车 - 聚氨酯
Medium-sized flat-directional / directional brake- Polyurethane




22-***-08

- 轮辐用钢板冲压成型，轮胎采用优质聚氨酯浇铸，高耐磨，行走轻便安静
- 载重范围 100-350kg

- The spoke of a wheel pressess but shaping with the stencil plate, the tire adopts the high-quality polyurethane, it is high wear-resisting, walk lightly quietly.
- load range 100-350kg


22-***-08B

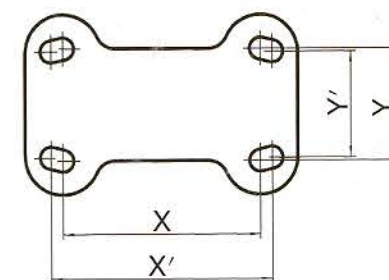

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	底板 baseplate	孔径 bore hole diameter		孔径 bore hole spacing aperture
				定向式 directional	定向刹制式 directional brake				XxY	X' xY'	
优质聚氨酯 Quality Polyurethane	75	32	100	22-075-08	22-075-08B	滚珠 ball	101	95x72	63x40	63x40	9.5
	100	32	200	22-100-08	22-100-08B		144	120x82	80x45	90x50	
	130	35	280	22-130-08	22-130-08B		172	138x90	100x56	112x53	11
	150	38	320	22-150-08	22-150-08B		197	138x90	100x56	112x53	
	200	42	350	22-200-08	22-200-08B		250	152x103	112x63	119x56	11.5




中型 平板 - 万向 / 万向刹车 - 尼龙 / 聚氨脂
Medium-sized flat- universal/universal brake-Nylon/Polyurethane

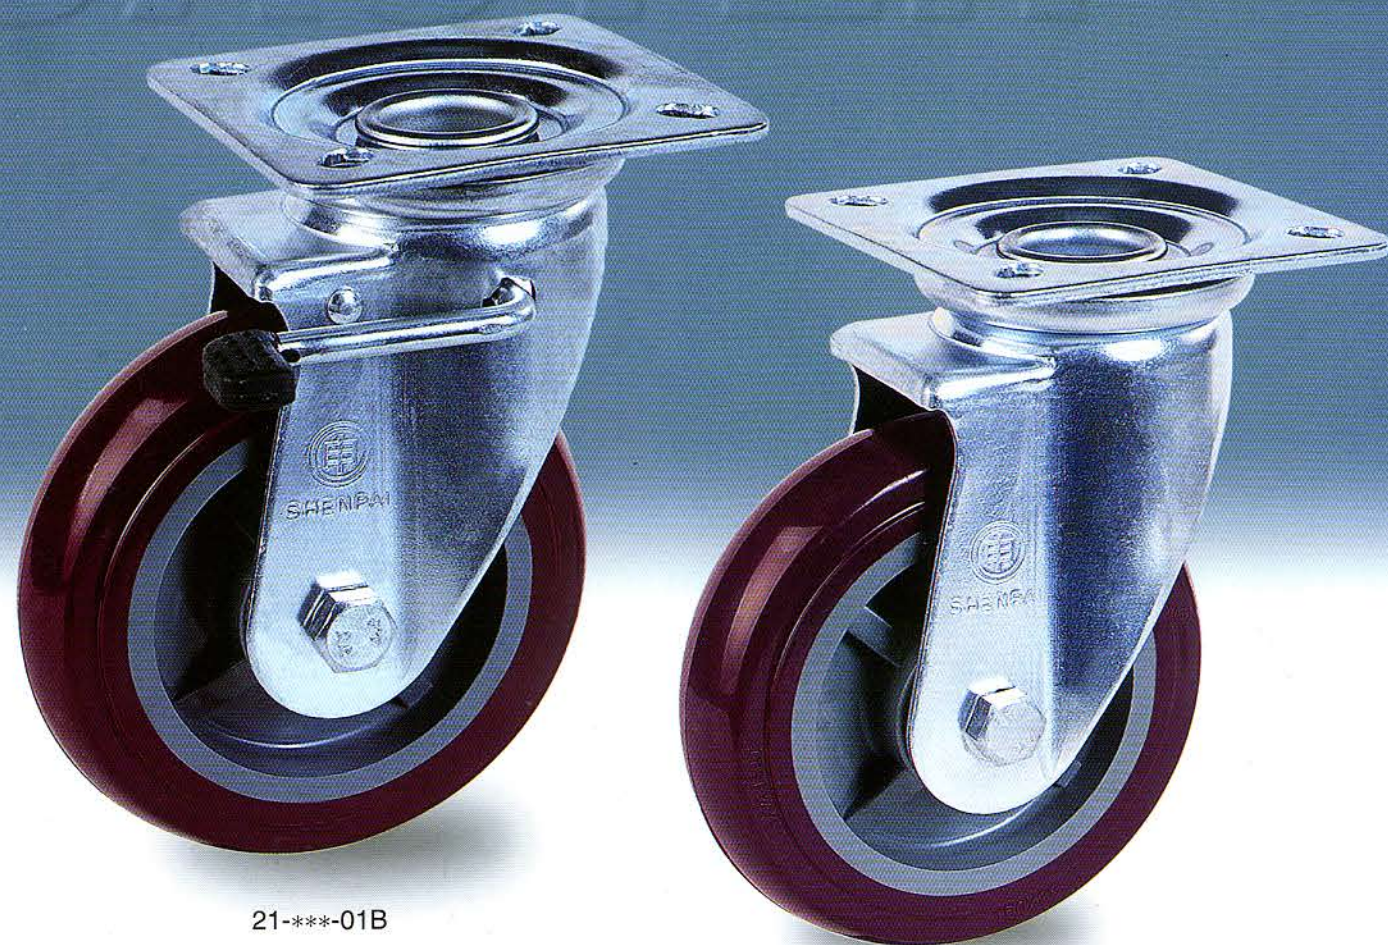

21-***-01B

21-***-01

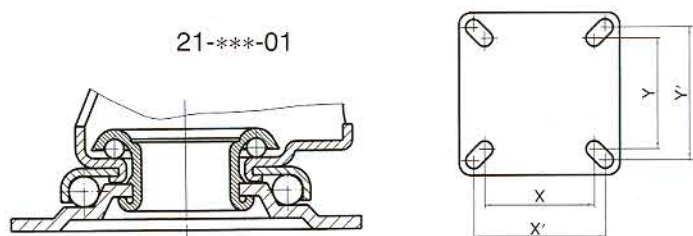

● 载重范围 110-250kg ● load range 110-250kg

单轮材料 material	轮径 diameter mm	轮宽 width mm	载重 load kg	型号 Model Number		轴承 bearing	全高 height mm	偏心 partial mm	底板 baseplate mm	孔径 bore hole diameter mm		孔径 bore hole spacing aperture mm
				万向式 universal	万向刹制式 universal brake					XxY	X' xY'	
聚氨脂 Polyurethane	100	32	110	21-100-01	21-100-01B	滚珠 ball	144	35	97x97	67x67	74x74	11
	130	35	140	21-130-01	21-130-01B		172	38	110x110	75x75	90x90	
	150	38	165	21-150-01	21-150-01B		197	40	120x120	75x75	90x90	
	200	40	200	21-200-01	21-200-01B		250	58	140x140	100x100	115x115	
尼龙 Nylon	100	32	130	21-100-02	21-100-02B		144	35	97x97	67x67	74x74	11
	130	35	180	21-130-02	21-130-02B		172	38	110x110	75x75	90x90	
	150	38	200	21-150-02	21-150-02B		197	40	120x120	75x75	90x90	
	200	40	250	21-200-02	21-200-02B		250	58	140x140	100x100	115x115	




中型 平板 - 定向 / 定向刹车 - 尼龙 / 聚氨脂
Medium-sized flat-directional / directional brake-Nylon/Polyurethane



22-***-01B

22-***-01



● 载重范围 110-250kg ● load range 110-250kg


单轮材料 material	轮径 diameter mm	轮宽 width mm	载重 load kg	型号 Model Number		轴承 bearing	全高 height mm	底板 baseplate mm	孔径 bore hole diameter mm		孔径 bore hole spacing aperture mm
				定向式 directional	定向刹制式 directional brake				XxY	X' xY'	
聚氨脂 Polyurethane	100	32	110	22-100-01	22-100-01B	滚珠 ball	144	120x82	80x45	90x50	11
	130	35	140	22-130-01	22-130-01B		172	138x90	100x56	112x53	
	150	38	165	22-150-01	22-150-01B		197	138x90	100x56	112x53	
	200	40	200	22-200-01	22-200-01B		250	152x103	112x63	119x56	
尼龙 Nylon	100	32	130	22-100-02	22-100-02B		144	120x82	80x45	90x50	11
	130	35	180	22-130-02	22-130-02B		172	138x90	100x56	112x53	
	150	38	200	22-150-02	22-150-02B		197	138x90	100x56	112x53	
	200	40	250	22-200-02	22-200-02B		250	152x103	112x63	119x56	



中型 丝杆-万向/万向刹车-橡胶/聚氨脂
Medium-sized silk pole-universal/universal brake-Rubber/Polyurethane



23-***-08

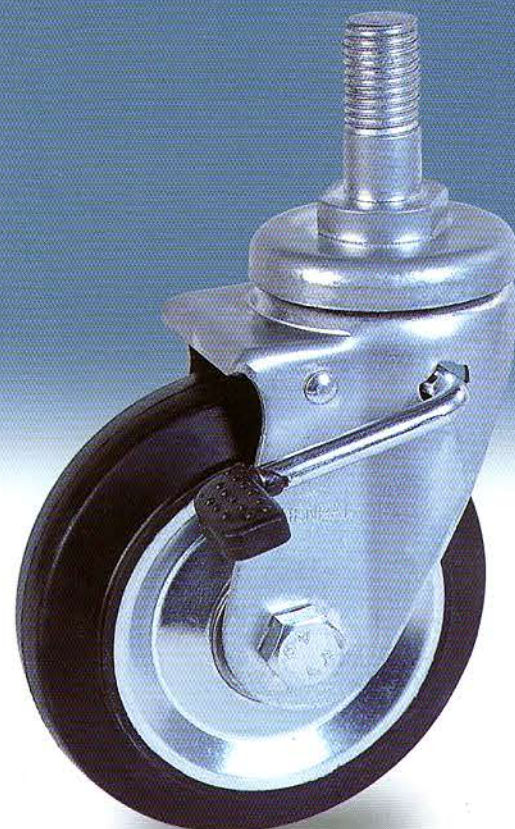

23-***-06B

● 载重范围 140-300kg ● load range 140-300kg


				型号						
				Model	Number					
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	丝杆长 silk pole length	丝杆直径 link pin diameter
优质橡胶 Quality Rubber	130	40	180	23-130-06 37.3	23-130-06B 43.9	滚珠 ball	172	38	40	M16 (M20)
	150	43	200	23-150-06 47.5	23-150-06B 55.3		197	40		
	200	45	250	23-200-06 60.5	23-200-06B 73.6		250	58		
优质聚氨脂 Quality Polyurethane	130	35	200	23-130-08 43.4	23-130-08B 50.7		172	38		
	150	38	250	23-150-08 57.4	23-150-08B 66.6		197	40		
	200	42	300	23-200-08 70	23-200-08B 85.1		250	58		
塑芯聚氨脂 Plastic core Polyurethane	130	35	140	23-130-01 24.5	23-130-01B 27.9		172	38		
	150	38	165	23-150-01 31.5	23-150-01B 36.0		197	40		
	200	40	200	23-200-01 42	23-200-01B 46.0		250	58		



中型 插杆-万向/万向刹车-橡胶/聚氨脂
Medium-sized insert pole-universal/universal brake-Rubber/Polyurethane



24-***-06

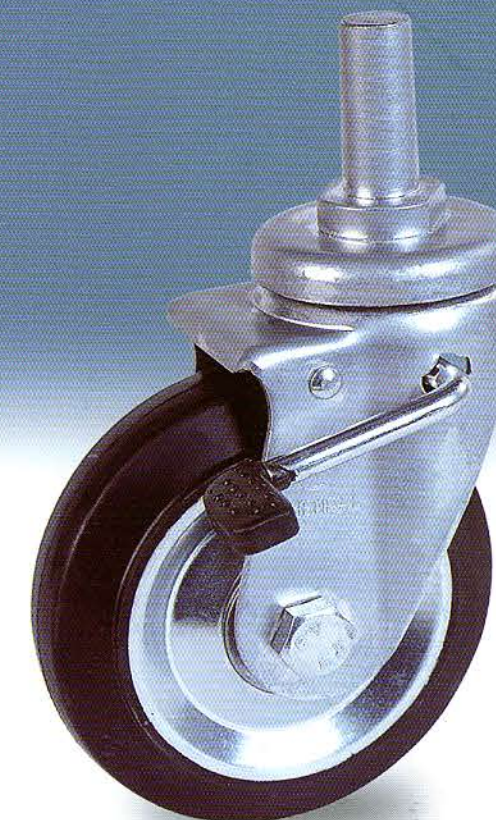


24-***-06B

● 载重范围 140-300kg ● load range 140-300kg


				型号						
				Model	Number					
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	轴高 bearing height	轴径 bearing diameter
优质橡胶 Quality Rubber	130	40	180	24-130-06 37.3	24-130-06B 43.9	滚珠 ball	172	38	50	φ 29
	150	43	200	24-150-06 47.5	24-150-06B 55.3		197	40		
	200	45	250	24-200-06 60.5	24-200-06B 73.6		250	58		
优质聚氨脂 Quality Polyurethane	130	35	200	24-130-08 43.4	24-130-08B 50.7		172	38		
	150	38	250	24-150-08 57.4	24-150-08B 66.6		197	40		
	200	42	300	24-200-08 70	24-200-08B 85.1		250	58		
塑芯聚氨脂 Plastic core Polyurethane	130	35	140	24-130-01 24.5	24-130-01B 27.9		172	38		
	150	38	165	24-150-01 31.5	24-150-01B 36.0		197	40		
	200	40	200	24-200-01 42	24-200-01B 46.0		250	58		



中型 插杆 - 定向 / 定向刹车 - 橡胶 / 聚氨脂
Medium-sized insert pole- directional/directional brake-Rubber/Polyurethane

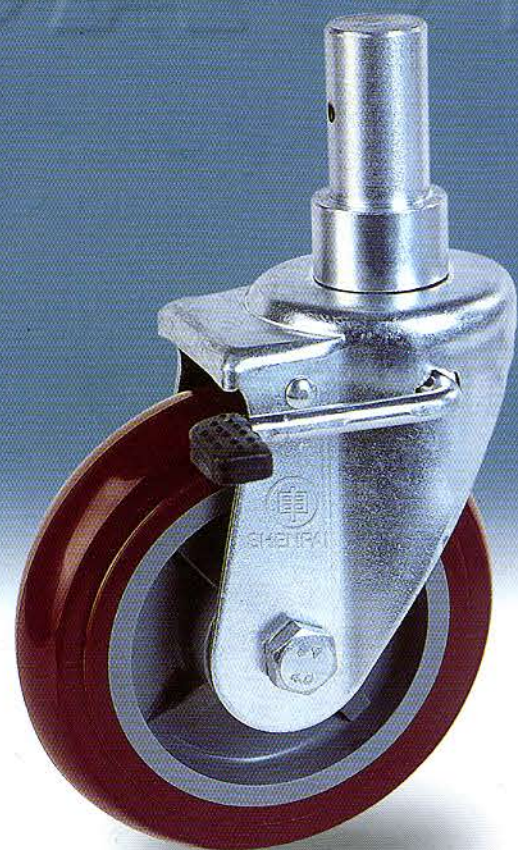

25-***-01B

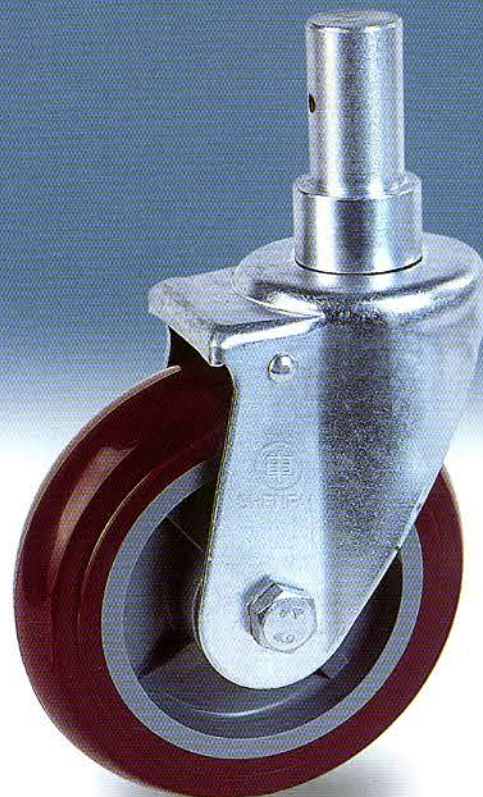


25-***-01

● 载重范围 140-300kg ● load range 140-300kg

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	轴高 bearing height	轴径 bearing diameter
				定向式 directional	定向刹制式 directional brake					
优质橡胶 Quality Rubber	130	40	180	25-130-06 28.2	25-130-06B 31.7	滚珠 ball	172	38	50	φ 29
	150	43	200	25-150-06 41.1	25-150-06B 43.1		197	40		
	200	45	250	25-200-06 54	25-200-06B 56.5		250	58		
优质聚氨脂 Quality Polyurethane	130	35	200	25-130-08 34.5	25-130-08B 36.5		172	38		
	150	38	250	25-150-08 50	25-150-08B 52.5		197	40		
	200	42	300	25-200-08 62.3	25-200-08B 64.8		250	58		
塑芯聚氨脂 Plastic core Polyurethane	130	35	140	25-130-01 18.9	25-130-01B 21		172	38		
	150	38	165	25-150-01 25	25-150-01B 27.3		197	40		
	200	40	200	25-200-01 35	25-200-01B 37.5		250	58		



重型 平板 - 万向 / 万向刹车 - 尼龙 / 聚氨脂
Heavy flat-universal/universal brake-Nylon/Polyurethane

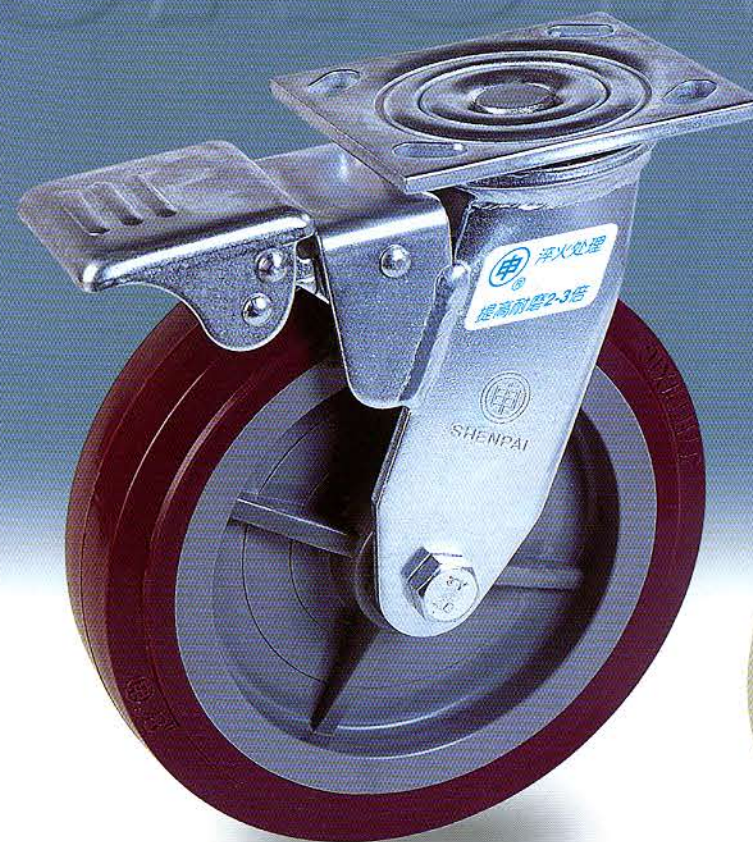


31-***-01B



31-***-02


- 支架表面喷丸镀锌处理
- 滚珠跑道渗碳淬火处理
- 载重范围 200-380kg
- the support surface gushes out pills to deal with zinc-platedly.
- carburize and quench dealing with in the ball runway.
- load range 200-380kg



单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
				万向式 universal	万向刹制式 universal brake						
聚氨脂 Polyurethane	102	45	200	31-102-01 26.8	31-102-01B 34	滚珠 / 滚针 ball/needle	140	39	115x102	84x70	11
	127	50	240	31-127-01 30	31-127-01B 35.3		165	40			
	152	50	280	31-152-01 33.7	31-152-01B 35.7		190	45			
	203	50	300	31-203-01 38.4	31-203-01B 44.5		240	52			
尼龙 Nylon	102	45	300	31-102-02 26.6	31-102-02B 32.4		140	39			
	127	50	330	31-127-02 30	31-127-02B 35.5		165	40			
	152	50	350	31-152-02 33.5	31-152-02B 39.10		190	45			
	203	50	380	31-203-02 38	31-203-02B 43.70		240	52			



重型 平板 - 万向 / 万向刹车 - 铁芯聚氨酯 / 铸铁
Heavy flat-universal/universal brake- Iron-core polyurethane/cast-iron

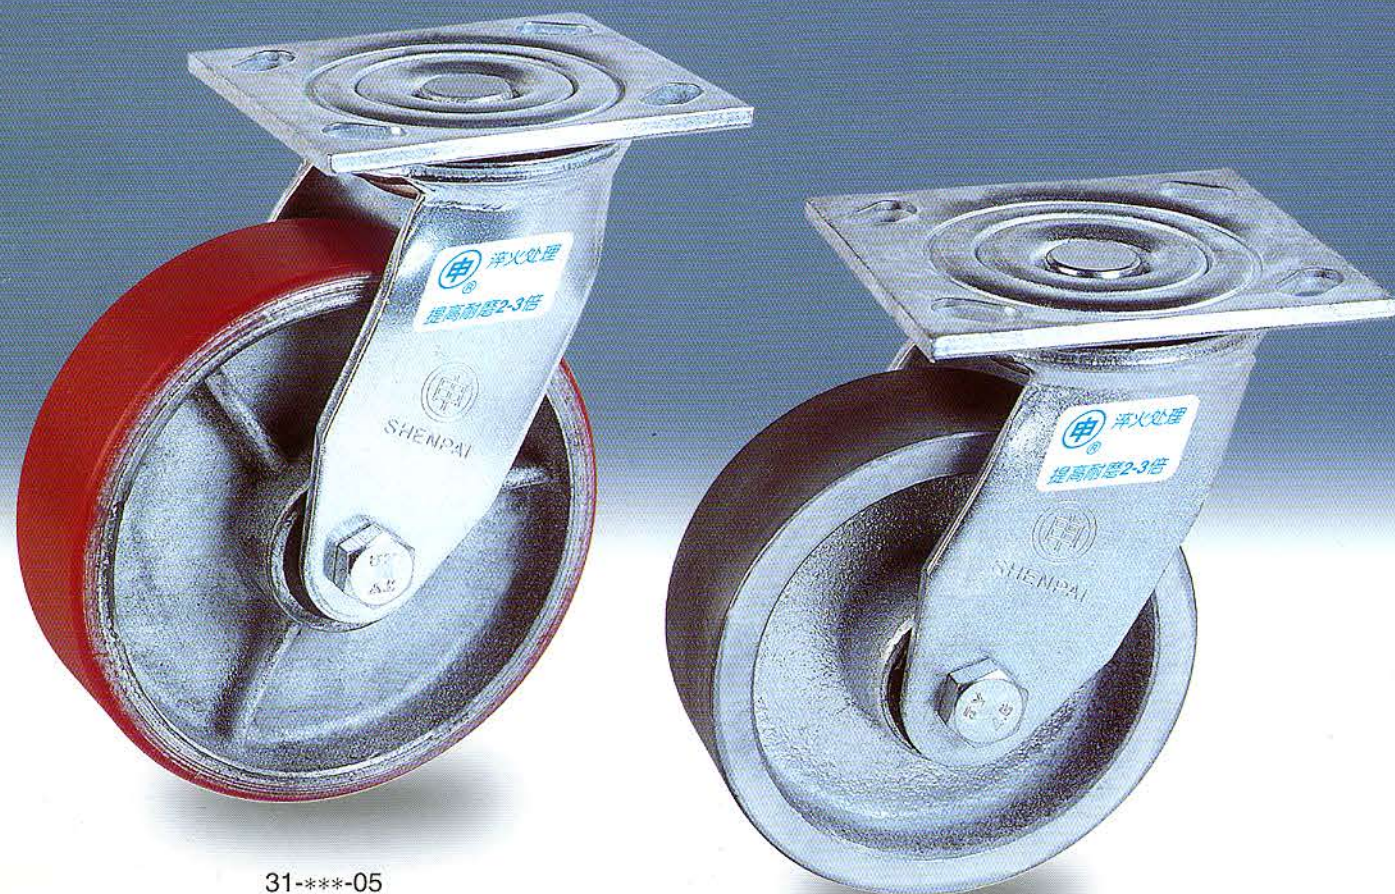


31-***-05

31-***-04

- 支架表面喷丸镀锌处理
- 滚珠跑道渗碳淬火处理
- 载重范围 300-400kg


- the support surface gushes out pills to deal with zinc-platedly.
- carburize and quench dealing with in the ball runway.
- load range 300-400kg



				型号										
	mm	mm	kg	Model Number			mm	mm	mm	mm	mm			
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture			
铁芯聚氨酯 Iron-core polyurethane	102	45	300	31-102-05		滚珠 / 滚针 ball/needle	140	39	115x102	84x70	11			
	127	50	350	31-127-05	31-127-05B		165	40						
	152	50	380	31-152-05	31-152-05B		190	45						
	203	50	400	31-203-05	31-203-05B		240	52						
铸铁 cast-iron	100	45	300	31-100-04			140	39						
	125	48	350	31-125-04			165	40						
	150	48	380	31-150-04			190	45						
	200	50	400	31-200-04			240	52						




重型 平板 - 定向 - 聚氨酯 / 尼龙 / 铸铁
Heavy flat-directional- polyurethane / Nylon / cast-iron

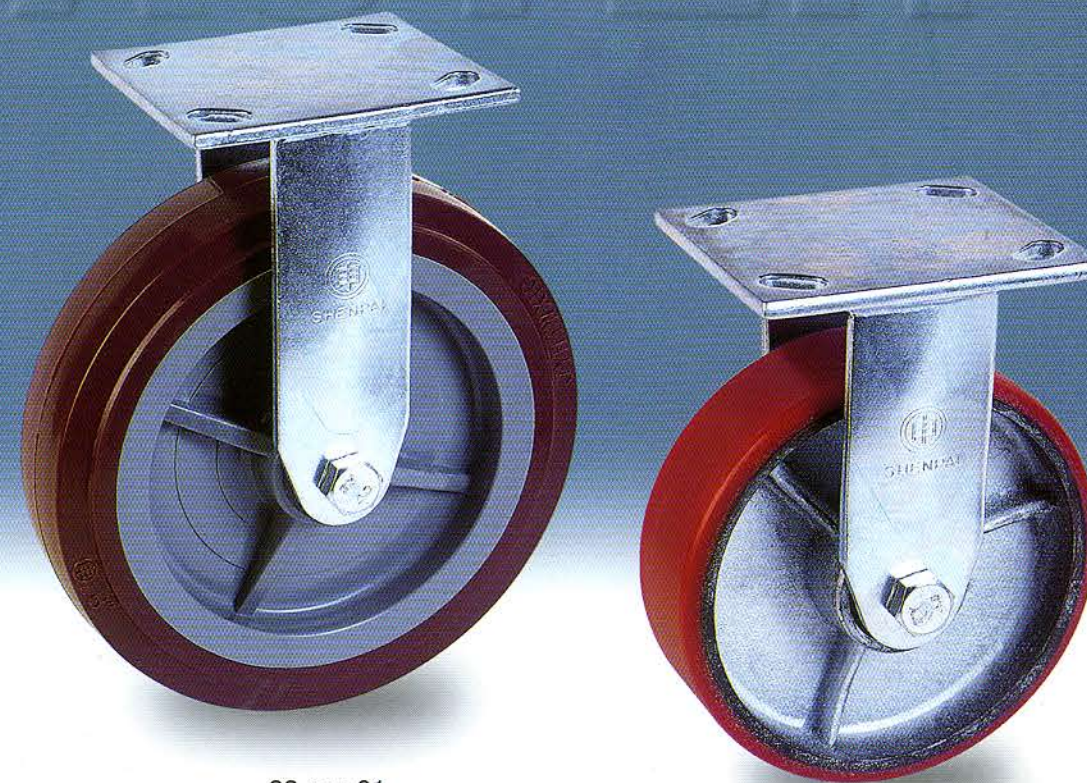

32-***-01

32-***-05




- 载重范围 200-400kg
- load range 200-400kg

				型号					
	mm	mm	kg	Model Number		mm	mm	mm	mm
单轮材料 material	轮径 diameter	轮宽 width	载重 load	定向式 directional	轴承 bearing	全高 height	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
聚氨酯 Polyurethane	102	45	200	32-102-01	滚珠 / 滚针 ball/needle	140	115x102	84x70	11
	127	50	240	32-127-01		165			
	152	50	280	32-152-01		190			
	203	50	300	32-203-01		240			
尼龙 Nylon	102	45	300	32-102-02		140			
	127	50	330	32-127-02		165			
	152	50	350	32-152-02		190			
	203	50	380	32-203-02		240			
铁芯聚氨酯 Iron-core polyurethane	102	45	300	32-102-05		140			
	127	50	350	32-127-05		165			
	152	50	380	32-152-05		190			
	203	50	400	32-203-05		240			
铸铁 cast-iron	100	45	300	32-100-04		140			
	125	48	350	32-125-04		165			
	150	48	380	32-150-04		190			
	200	50	400	32-200-04		240			



重型 丝杆 - 万向 / 万向刹车 - 聚氨脂 / 尼龙
Heavy silk pole-universal/universal brake- Polyurethane/Nylon

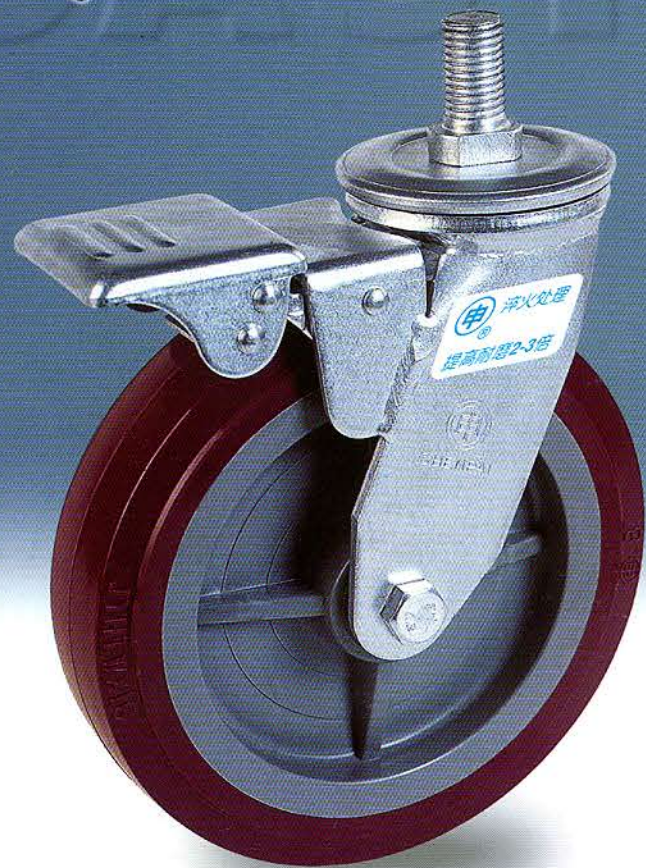

33-***-01B




33-***-02

● 载重范围 200-350kg ● load range 200-350kg


单轮材料 material	mm diameter	mm width	kg load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	丝杆长 silk pole length	丝杆直径 link pin diameter
				万向式 universal	万向刹制式 universal brake					
聚氨脂 Polyurethane	102	45	200	33-102-01	33-102-01B	滚珠 / 滚针 ball/needle	150	39	35	M20
	127	50	230	33-127-01	33-127-01B		175	40		
	152	50	260	33-152-01	33-152-01B		200	45		
	203	50	270	33-203-01	33-203-01B		250	52		
尼龙 Nylon	102	45	230	33-102-02	33-102-02B		150	39		
	127	50	250	33-127-02	33-127-02B		175	40		
	152	50	320	33-152-02	33-152-02B		200	45		
	203	50	350	33-203-02	33-203-02B		250	52		




重型 平板 - 万向 / 定向 - 尼龙
Heavy flat-universal/directional- Nylon

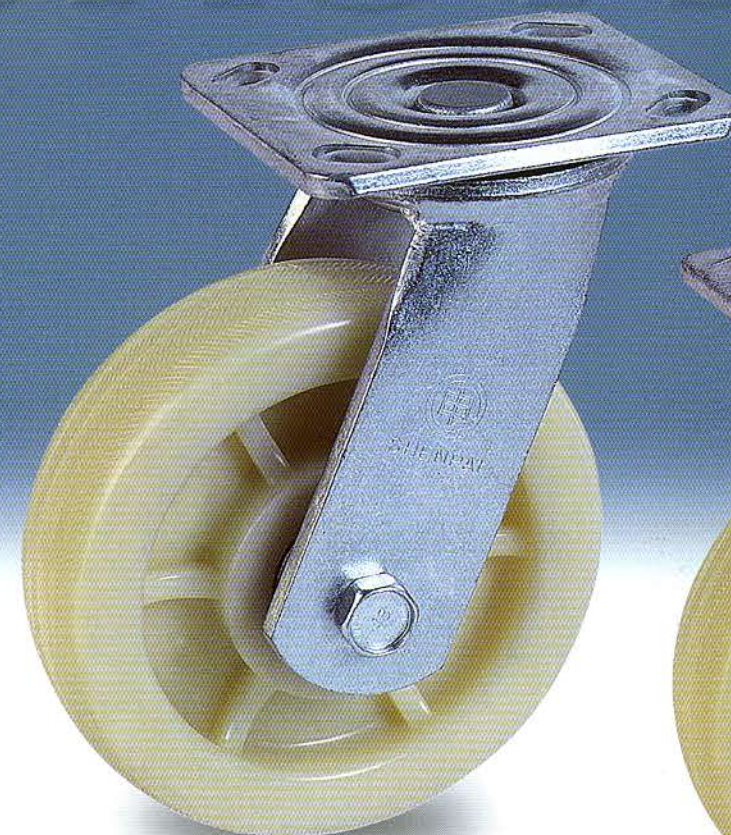

31-***-09

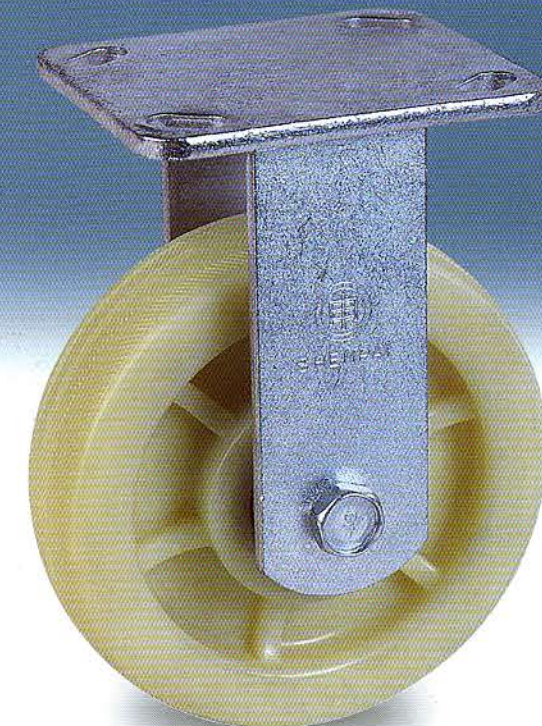

32-***-09

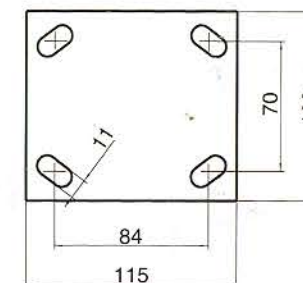


● 载重范围 250-380kg ● load range 250-380kg

单轮材料 material	mm diameter	mm width	kg load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
				万向式 universal	定向式 directional						
全尼龙 All the Nylon	100	42	250	31-100-09	32-100-09	滚珠 ball	140	29	115x102	84x70	11
	125	45	280	31-125-09	32-125-09		165	35			
	150	45	350	31-150-09	32-150-09		190	40			
	200	45	380	31-200-09	32-200-09		240	50			




重型 平板 - 万向刹车 / 定向 - 聚氨酯(A式)
Heavy flat- universal brake/directional- Polyurethane(A type)

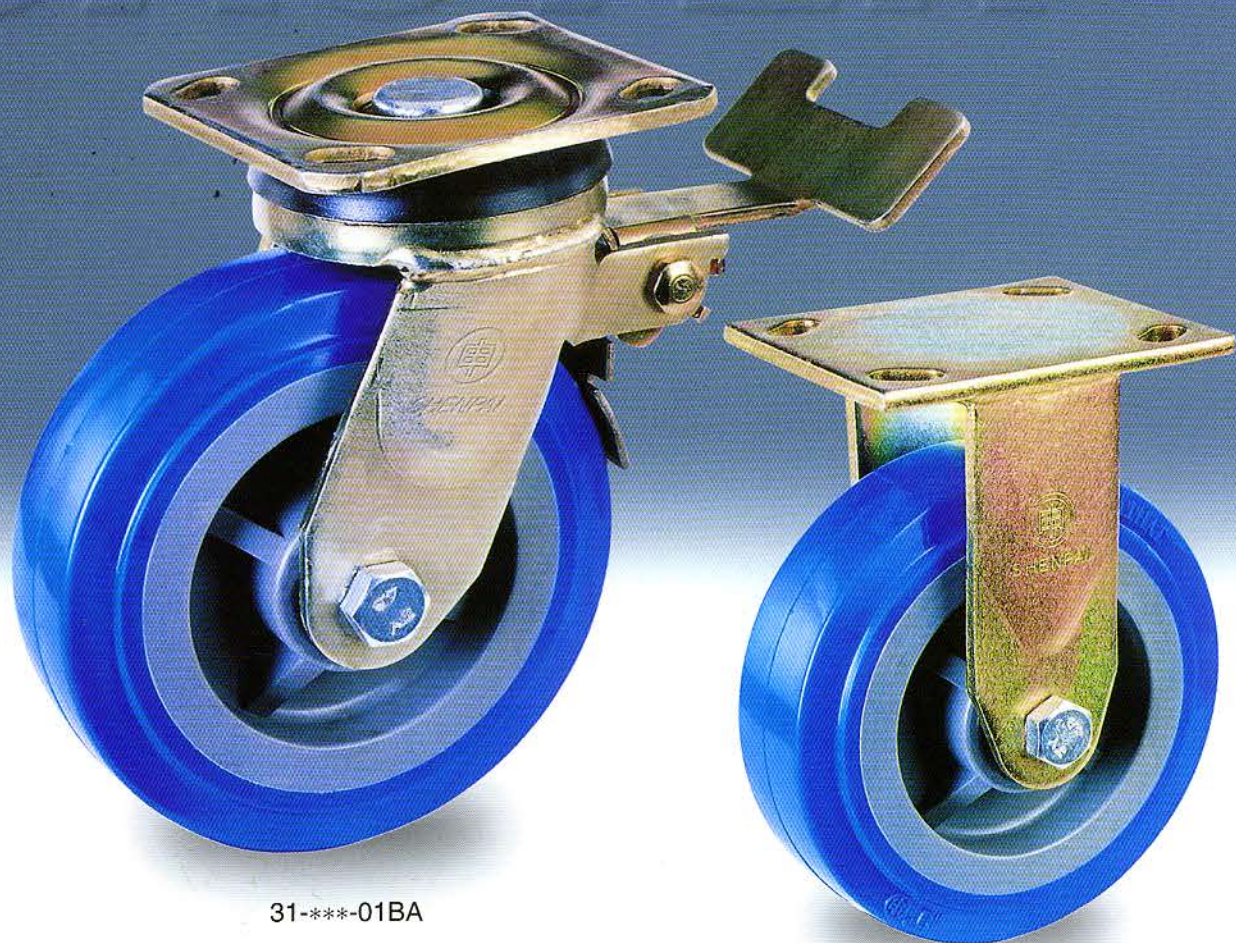

31-***-01BA

32-***-01A

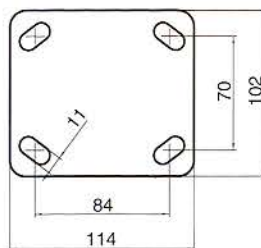

- 支架表面喷丸镀锌处理
- 滚珠跑道渗碳淬火处理
- 载重范围 240-450kg
- the support surface gushes out pills to deal with zinc-platedly.
- carburize and quench dealing with in the ball runway.
- load range 240-450kg

				型号							
				Model	Number						
单轮材料 material	轮径 diameter	轮宽 width	载重 load	定向式 directional	万向刹制式 universal brake	轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
塑芯聚氨酯 plastic core Polyurethane	127	50	240	32-127-01A 28.8	31-127-01BA 44.3	滚珠 / 滚针 ball/needle	165	30	114x102	84x70	11
	152	50	280	32-152-01A 33.5	31-152-01BA 49.7		190	35			
	203	50	300	32-203-01A 40.2	31-203-01BA 56.5		240	47			
铁芯聚氨酯 iron core Polyurethane	127	50	350	32-127-05A 34.3	31-127-05BA 50.7		165	30			
	152	50	400	32-152-05A 41.2	31-152-05BA 60		190	35			
	203	50	450	32-203-05A 52.8	31-203-05BA 71.3		240	47			



重型(低重心) 平板 - 万向 / 定向 - 尼龙
Heavy(low barycenter) flat- universal/directional-Nylon



31-***-09


32-***-09

- 载重范围 150-200kg
- load range 150-200kg

				型号							
				Model	Number						
单轮材料 material	轮径 diameter	轮宽 width	载重 load	万向式 universal	定向式 directional	轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
全尼龙 All the Nylon	65	46	150	31-065-09	32-065-09	滚针 needle	92	24	105x80	81x59	9
	75	46	200	31-075-09	32-075-09		102				




超重型 平板 - 万向 / 定向 - 铁芯聚氨酯(U 式)
overweight flat- universal/directional- iron core Polyurethane(U type)

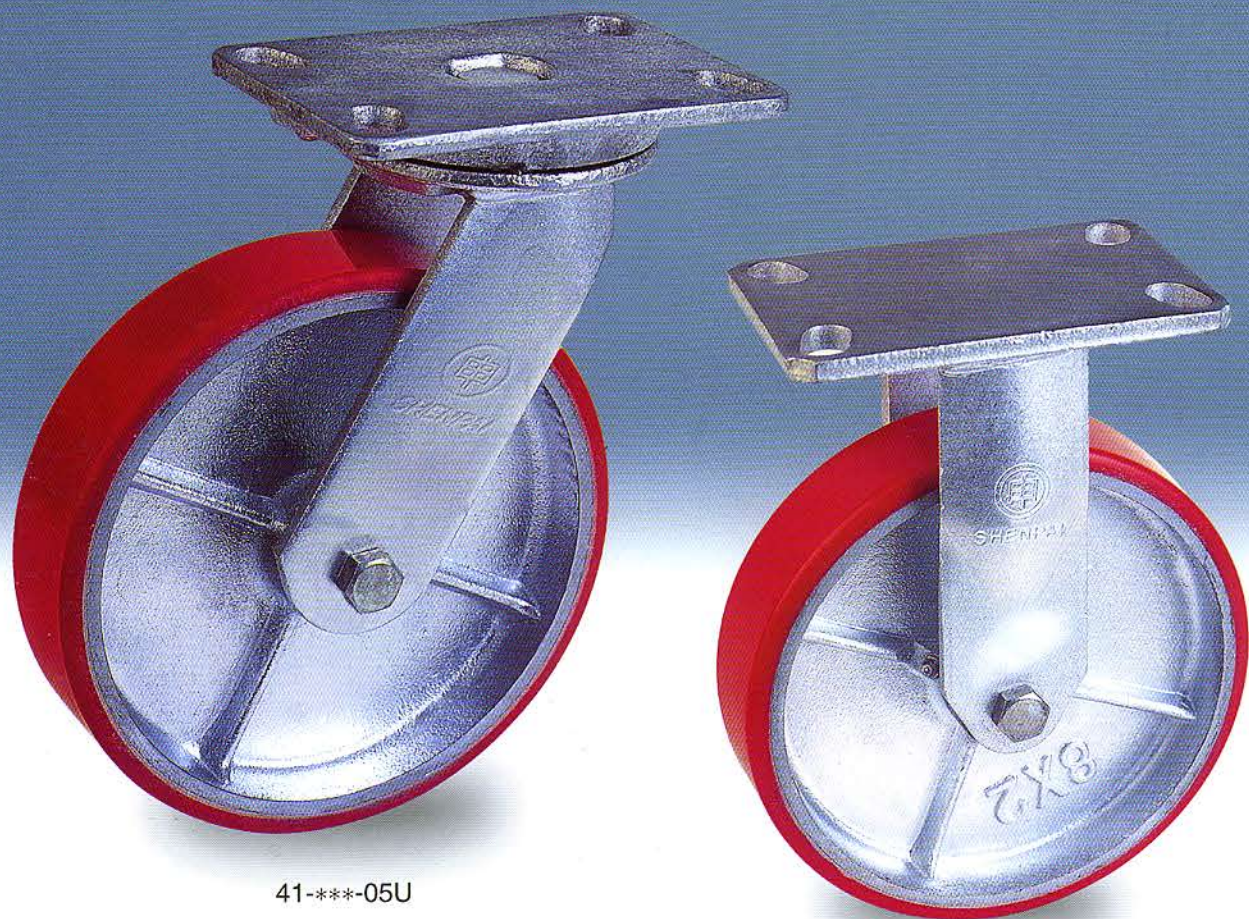

41-***-05U

42-***-05U

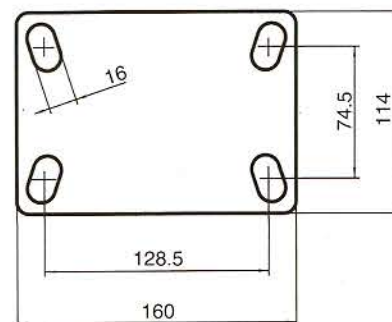

- 性能: 抗冲击、超载荷。
- 载重范围 550-800kg

- Function: resist impaction, overload
- load range 550-800kg

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
				万向式 universal	定向式 directional						
铁芯聚氨酯 iron core Polyurethane	127	50	550	41-127-05U	42-127-05U	滚珠 / 滚针 ball/needle	165	45	160x114	128.5x74.5	16
	152	50	650	41-152-05U	42-152-05U		190	55			
	203	50	800	41-203-05U	42-203-05U		255	58			




超重型(双轮) 平板 - 万向 - 铁芯聚氨酯(U 式)
overweight(two wheels) flat- universal- iron core Polyurethane(U type)



S41-***-05U

- 性能: 抗冲击、超载荷。
- 载重范围 3500-4000kg

- Function: resist impaction, overload
- load range 3500-4000kg

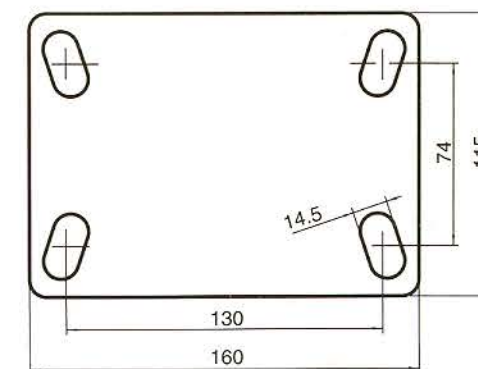

单轮材料 material	轮径 diameter	轮宽 width	载重 load	型号 Model Number		轴承 bearing	全高 height	偏心 partial	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
				万向式 universal	定向式 directional						
铁芯聚氨酯 iron core Polyurethane	152	64	3500	S41-152-05U		滚珠 ball	205	50	160x115	130x74	14.5
	203	64	4000	S41-203-05U			255	60			



Q 型 纺织棉条桶专用脚轮 Q type textile sliver can special-purpose caster



51-065-12



51-080-12



51-050-02



51-063-09

● 载重范围 20-50kg ● load range 20-50kg

mm		型号 Model Number	Kg kg	mm	mm	mm	mm
轮径 diameter	单轮材料 material	万向式 universal	载重 load	全高 height	底板 baseplate	孔距 bore hole diameter	孔径 bore hole spacing aperture
65(2.5")	铁芯尼龙 Iron-core Nylon	51-065-12	20	78(80)	梯: 102x(80)x40	梯形板: 88x64x25	7
	铸铁 Cast-iron	51-065-04			方: 40x40	方板: 26x26	
80(3")	铁芯尼龙 Iron-core Nylon	51-080-12	50	105	72x40	56x22	7
	铸铁 Cast-iron	51-080-04					
50	尼龙 Nylon	51-050-02	50	80(72)	70x59	54x42	6
63	尼龙 Nylon	51-063-09	30	80	70x70	46x46	

产品编号说明 product number explain

X X	XXX	XX
载荷类型	轮径	轮缘材料
1 轻型	0 单轮	01 聚氨脂
2 中型	1 平板万向	02 尼龙
3 重型	2 平板定向	03 橡塑
4 超重型	3 丝杆万向	04 铸铁
5 Q 型(纺织轮)	4 插杆万向	05 (铸铁芯)聚氨脂
	5 插杆定向	06 (钢板芯)橡胶
	6 顶孔万向	07 人造胶
		08 (钢板芯)聚氨脂
		09 全尼龙
		10 (铝芯)聚氨脂
		11 (铝芯)橡胶
		12 (铸铁芯)尼龙
		13 (铸铁芯)橡胶

例: 11-076-01 表示: 轻型平板万向脚轮、φ 76mm 聚氨脂轮
23-100-06B 表示: 中型丝杆万向带刹车脚轮、φ 100mm 橡胶轮
20-150-06 表示: 中型 φ 150mm 橡胶轮



公司销售大楼
sale building of the company



公司新厂区
new plant side of the company