



# 20A 系列 SERIES 中型 Medium Duty

III  
20A


## 安装尺寸 Installation Drawing



平底活动/ 刹车底板  
Plate of Swivel Caster

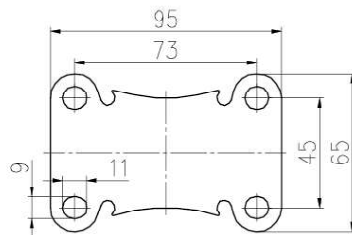

平底固定底板  
Plate of Rigid Caster

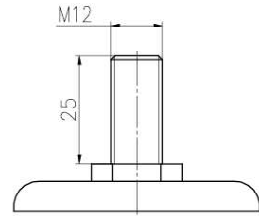

丝杆  
Threaded Stem




3-5"  
105-145 Kg

|                  | <br>性能参数<br>Performance parameters |                                                                                 | <br>轮面材质<br>Wheel material | <br>轮片轴承<br>Bearing | <br>轮片直径<br>(inch)<br>Wheel diameter | <br>轮面宽度<br>(mm)<br>Tire width | <br>载重<br>(kg)<br>Capacity | <br>平底固定<br>Rigid | <br>装箱数<br>PCs/CTN | <br>平底活动<br>Swivel | <br>装箱数<br>PCs/CTN | <br>平底刹车<br>Swivel with brake | <br>装箱数<br>PCs/CTN | <br>丝杆活动<br>Threaded stem swivel | <br>装箱数<br>PCs/CTN | <br>丝杆刹车<br>Threaded stem swivel with brake | <br>装箱数<br>PCs/CTN |    |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----|
| <br><b>PUPA</b> | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent | 轮面硬度<br>Hardness<br>95±3A°                                                                                  | 聚氨酯<br>Polyurethane<br>on<br>plastic core                                                              | 一体轴承<br>Annular<br>ball<br>bearing                                                                                      | 3"                                                                                                                | 30                                                                                                            | 90                                                                                                   | 20AB1-1014                                                                                            | 35                                                                                                    | 20A01-1014                                                                                            | 35                                                                                                               | 20A3B-1014                                                                                            | 30                                                                                                                  | 20A04-1014                                                                                            | 35                                                                                                                             | 20A7B-1014                                                                                            | 30 |
| 耐磨耐用 Durability                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good                                          | 3.5"                                                                            |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 115                                                                                                           | 20AB2-1015                                                                                           | 35                                                                                                    | 20A10-1015                                                                                            | 35                                                                                                    | 20A4B-1015                                                                                                       | 30                                                                                                    | 20A13-1015                                                                                                          | 35                                                                                                    | 20A8B-1015                                                                                                                     | 30                                                                                                    |    |
| 运行静音 Quiet Operation                                                                               | <div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good                                          | 4"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 120                                                                                                           | 20AB3-1016                                                                                           | 30                                                                                                    | 20A19-1016                                                                                            | 30                                                                                                    | 20A5B-1016                                                                                                       | 25                                                                                                    | 20A22-1016                                                                                                          | 30                                                                                                    | 20A9B-1016                                                                                                                     | 25                                                                                                    |    |
| 地面保护 Floor Protection                                                                              | <div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good                                          | 5"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 140                                                                                                           | 20AB4-1017                                                                                           | 20                                                                                                    | 20A28-1017                                                                                            | 20                                                                                                    | 20A6B-1017                                                                                                       | 15                                                                                                    | 20A31-1017                                                                                                          | 20                                                                                                    | 20A1B-1017                                                                                                                     | 15                                                                                                    |    |
| <br><b>PAPA</b> | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent | 轮面硬度<br>Hardness<br>75D±3                                                                                   | 尼龙<br>Nylon<br>on<br>plastic core                                                                      | 一体轴承<br>Annular<br>ball<br>bearing                                                                                      | 3"                                                                                                                | 30                                                                                                            | 105                                                                                                  | 20AB1-1018                                                                                            | 35                                                                                                    | 20A01-1018                                                                                            | 35                                                                                                               | 20A3B-1018                                                                                            | 30                                                                                                                  | 20A04-1018                                                                                            | 35                                                                                                                             | 20A7B-1018                                                                                            | 30 |
| 耐磨耐用 Durability                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent                                     | 3.5"                                                                            |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 115                                                                                                           | 20AB2-1019                                                                                           | 35                                                                                                    | 20A10-1019                                                                                            | 35                                                                                                    | 20A4B-1019                                                                                                       | 30                                                                                                    | 20A13-1019                                                                                                          | 35                                                                                                    | 20A8B-1019                                                                                                                     | 30                                                                                                    |    |
| 运行静音 Quiet Operation                                                                               | <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                                       | 4"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 135                                                                                                           | 20AB3-1020                                                                                           | 30                                                                                                    | 20A19-1020                                                                                            | 30                                                                                                    | 20A5B-1020                                                                                                       | 25                                                                                                    | 20A22-1020                                                                                                          | 30                                                                                                    | 20A9B-1020                                                                                                                     | 25                                                                                                    |    |
| 地面保护 Floor Protection                                                                              | <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                                       | 5"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 145                                                                                                           | 20AB4-1021                                                                                           | 20                                                                                                    | 20A28-1021                                                                                            | 20                                                                                                    | 20A6B-1021                                                                                                       | 15                                                                                                    | 20A31-1021                                                                                                          | 20                                                                                                    | 20A1B-1021                                                                                                                     | 15                                                                                                    |    |
| <br><b>PP-B</b> | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent | 轮面硬度<br>Hardness<br>75D±3                                                                                   | 聚丙烯<br>Polypropylene                                                                                   | 双滚珠<br>Ball<br>bearing                                                                                                  | 3"                                                                                                                | 30                                                                                                            | 105                                                                                                  | 20AB1-1040                                                                                            | 35                                                                                                    | 20A01-1040                                                                                            | 35                                                                                                               | 20A3B-1040                                                                                            | 30                                                                                                                  | 20A04-1040                                                                                            | 35                                                                                                                             | 20A7B-1040                                                                                            | 30 |
| 耐磨耐用 Durability                                                                                    | <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                                       | 3.5"                                                                            |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 115                                                                                                           | 20AB2-1041                                                                                           | 35                                                                                                    | 20A10-1041                                                                                            | 35                                                                                                    | 20A4B-1041                                                                                                       | 30                                                                                                    | 20A13-1041                                                                                                          | 35                                                                                                    | 20A8B-1041                                                                                                                     | 30                                                                                                    |    |
| 运行静音 Quiet Operation                                                                               | <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                                       | 4"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 120                                                                                                           | 20AB3-1042                                                                                           | 30                                                                                                    | 20A19-1042                                                                                            | 30                                                                                                    | 20A5B-1042                                                                                                       | 25                                                                                                    | 20A22-1042                                                                                                          | 30                                                                                                    | 20A9B-1042                                                                                                                     | 25                                                                                                    |    |
| 地面保护 Floor Protection                                                                              | <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                                       | 5"                                                                              |                                                                                                             |                                                                                                        |                                                                                                                         | 32                                                                                                                | 135                                                                                                           | 20AB4-1043                                                                                           | 20                                                                                                    | 20A28-1043                                                                                            | 20                                                                                                    | 20A6B-1043                                                                                                       | 15                                                                                                    | 20A31-1043                                                                                                          | 20                                                                                                    | 20A1B-1043                                                                                                                     | 15                                                                                                    |    |

## 外形尺寸 Overall Dimensions

| 尺寸   | 轮径  | 平底全高 | 丝杆全高 | 偏心距 | 旋转半径 | 旋转半径 |
|------|-----|------|------|-----|------|------|
| D    | D   | H    | H    | F   | r    | R    |
| 3"   | 75  | 108  | 111  | 34  | 72   | 117  |
| 3.5" | 88  | 120  | 123  | 32  | 77   | 117  |
| 4"   | 100 | 135  | 138  | 32  | 82   | 117  |
| 5"   | 125 | 160  | 163  | 32  | 94.5 | 122  |



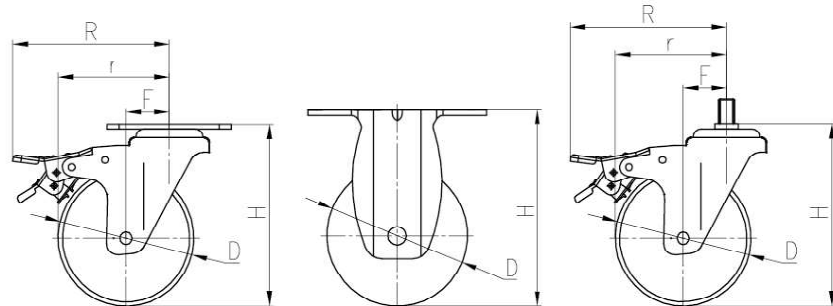


## 产品特点 Product Features

- 镀锌支架  
· 底板厚度3.5mm  
· 支架厚度2.5mm
- Galvanized bracket  
· Thickness of top plate 3.5mm  
· Thickness of bracket 2.5mm

## 选配支架 Optional Brackets


| 款式<br>Brake   | 轻便金属刹<br>Easy-pedal brake    | 经典款金属刹<br>Classic metal brake                     | 边刹<br>Side brake                          |
|---------------|------------------------------|---------------------------------------------------|-------------------------------------------|
| 3"            | 20A87                        | 20A02                                             | 20A37                                     |
| 3.5"          | -                            | 20A11                                             | 20A38                                     |
| 4"            | 20A88                        | 20A20                                             | 20A39                                     |
| 5"            | 20A89                        | 20A29                                             | 20A40                                     |
| 特点<br>Feature | 制动轻便<br>Very easy to operate | 锁紧力大, 10000次寿命测试<br>Tough brake, 10000 times life | 侧面制动, 方便踩踏<br>Side braking, easy to pedal |

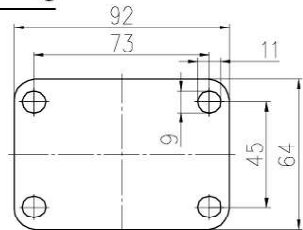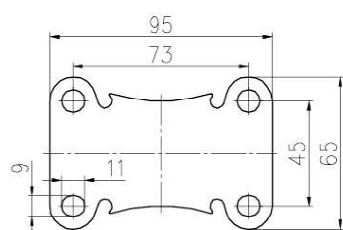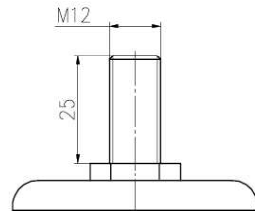20A 系列  
SERIES 中型 Medium DutyIII  
20A安装尺寸  
Installation Drawing平底活动/ 刹车底板  
Plate of Swivel Caster平底固定底板  
Plate of Rigid Caster丝杆  
Threaded Stem3-5"  
100-230 KgIII  
20A

| 性能参数<br>Performance parameters | 性能参数<br>Performance parameters |                 |                      |                       | 轮面材质<br>Wheel material                                        | 轮片轴承<br>Bearing            | 轮片直径<br>(inch)<br>Wheel diameter | 轮面宽度<br>(mm)<br>Tire width | 载重<br>(kg)<br>Capacity | 平底固定<br>Rigid | 装箱数<br>PCs/CTN | 平底活动<br>Swivel | 装箱数<br>PCs/CTN | 平底刹车<br>Swivel with brake | 装箱数<br>PCs/CTN | 丝杆活动<br>Threaded stem swivel | 装箱数<br>PCs/CTN | 丝杆刹车<br>Threaded stem swivel with brake | 装箱数<br>PCs/CTN |
|--------------------------------|--------------------------------|-----------------|----------------------|-----------------------|---------------------------------------------------------------|----------------------------|----------------------------------|----------------------------|------------------------|---------------|----------------|----------------|----------------|---------------------------|----------------|------------------------------|----------------|-----------------------------------------|----------------|
|                                | 运行省力 Rollability               | 耐磨耐用 Durability | 运行静音 Quiet Operation | 地面保护 Floor Protection |                                                               |                            |                                  |                            |                        |               |                |                |                |                           |                |                              |                |                                         |                |
| PUPS                           | 运行省力 Rollability               | 耐磨耐用 Durability | 运行静音 Quiet Operation | 地面保护 Floor Protection | 超级聚氨酯<br>Polyurethane<br>on plastic core                      | 单滚珠<br>Single ball bearing | 3"                               | 32                         | 100                    | 20AB1-1354    | 35             | 20A01-1354     | 35             | 20A3B-1354                | 30             | 20A04-1354                   | 35             | 20A7B-1354                              | 30             |
|                                |                                |                 |                      |                       |                                                               |                            | 4"                               | 32                         | 130                    | 20AB3-1355    | 30             | 20A19-1355     | 30             | 20A5B-1355                | 25             | 20A22-1355                   | 30             | 20A9B-1355                              | 25             |
|                                |                                |                 |                      |                       |                                                               |                            | 5"                               | 32                         | 140                    | 20AB4-1356    | 20             | 20A28-1356     | 20             | 20A6B-1356                | 15             | 20A31-1356                   | 20             | 20A1B-1356                              | 15             |
|                                |                                |                 |                      |                       |                                                               |                            |                                  |                            |                        |               |                |                |                |                           |                |                              |                |                                         |                |
| PUPB                           | 运行省力 Rollability               | 耐磨耐用 Durability | 运行静音 Quiet Operation | 地面保护 Floor Protection | 超级聚氨酯<br>Polyurethane<br>on plastic core                      | 双滚珠<br>Ball bearing        | 3"                               | 32                         | 110                    | 20AB1-0370    | 35             | 20A01-0370     | 35             | 20A3B-0370                | 30             | 20A04-0370                   | 35             | 20A7B-0370                              | 30             |
|                                |                                |                 |                      |                       |                                                               |                            | 4"                               | 32                         | 140                    | 20AB3-0371    | 30             | 20A19-0371     | 30             | 20A5B-0371                | 25             | 20A22-0371                   | 30             | 20A9B-0371                              | 25             |
|                                |                                |                 |                      |                       |                                                               |                            | 5"                               | 32                         | 150                    | 20AB4-0372    | 20             | 20A28-0372     | 20             | 20A6B-0372                | 15             | 20A31-0372                   | 20             | 20A1B-0372                              | 15             |
|                                |                                |                 |                      |                       |                                                               |                            |                                  |                            |                        |               |                |                |                |                           |                |                              |                |                                         |                |
| PUAB                           | 运行省力 Rollability               | 耐磨耐用 Durability | 运行静音 Quiet Operation | 地面保护 Floor Protection | 铝芯聚氨酯<br>Aluminum core<br>polyurethane                        | 双滚珠<br>Ball bearing        | 3"                               | 32                         | 150                    | 20AB1-1415    | 35             | 20A01-1415     | 35             | 20A3B-1415                | 30             | 20A04-1415                   | 35             | 20A7B-1415                              | 30             |
|                                |                                |                 |                      |                       |                                                               |                            | 4"                               | 32                         | 180                    | 20AB3-1416    | 30             | 20A19-1416     | 30             | 20A5B-1416                | 25             | 20A22-1416                   | 30             | 20A9B-1416                              | 25             |
|                                |                                |                 |                      |                       |                                                               |                            | 5"                               | 32                         | 230                    | 20AB4-1417    | 20             | 20A28-1417     | 20             | 20A6B-1417                | 15             | 20A31-1417                   | 20             | 20A1B-1417                              | 15             |
|                                |                                |                 |                      |                       |                                                               |                            |                                  |                            |                        |               |                |                |                |                           |                |                              |                |                                         |                |
| PRPS                           | 运行省力 Rollability               | 耐磨耐用 Durability | 运行静音 Quiet Operation | 地面保护 Floor Protection | 防静电人造胶<br>Anti-static thermoplastic elastomer on plastic core | 单滚珠<br>Single ball bearing | 3"                               | 32                         | 65                     | 20AB1-1770    | 35             | 20A01-1770     | 35             | 20A3B-1770                | 30             | 20A04-1770                   | 35             | 20A7B-1770                              | 30             |
|                                |                                |                 |                      |                       |                                                               |                            | 4"                               | 32                         | 80                     | 20AB3-1771    | 30             | 20A19-1771     | 30             | 20A5B-1771                | 25             | 20A22-1771                   | 30             | 20A9B-1771                              | 25             |
|                                |                                |                 |                      |                       |                                                               |                            | 5"                               | 32                         | 90                     | 20AB4-1772    | 20             | 20A28-1772     | 20             | 20A6B-1772                | 15             | 20A31-1772                   | 20             | 20A1B-1772                              | 15             |
|                                |                                |                 |                      |                       |                                                               |                            |                                  |                            |                        |               |                |                |                |                           |                |                              |                |                                         |                |

外形尺寸  
Overall Dimensions

| 尺寸   | 轮径  | 平底全高 | 丝杆全高 | 偏心距 | 旋转半径 | 旋转半径  |
|------|-----|------|------|-----|------|-------|
| D    | D   | H    | H    | F   | r    | R     |
| 3"   | 75  | 108  | 111  | 34  | 71.5 | 116.5 |
| 3.5" | 88  | 120  | 123  | 32  | 76   | 116   |
| 4"   | 100 | 135  | 138  | 32  | 82   | 116   |
| 5"   | 125 | 160  | 163  | 32  | 94.5 | 121   |

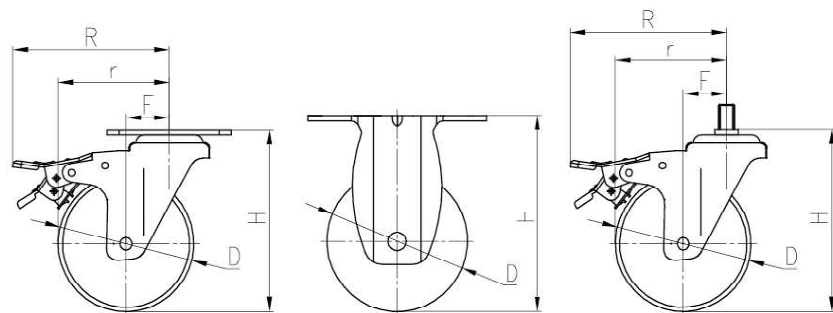产品特点  
Product Features

- 镀锌支架  
·底板厚度3.5mm  
·支架厚度2.5mm
- Galvanized bracket  
·Thickness of top plate 3.5mm  
·Thickness of bracket 2.5mm

选配支架  
Optional Brackets


| 款式<br>Brake   | 轻便金属刹<br>Easy-pedal brake    | 经典款金属刹<br>Classic metal brake                     | 边刹<br>Side brake                          |
|---------------|------------------------------|---------------------------------------------------|-------------------------------------------|
| 3"            | 20A87                        | 20A02                                             | 20A37                                     |
| 3.5"          | -                            | 20A11                                             | 20A38                                     |
| 4"            | 20A88                        | 20A20                                             | 20A39                                     |
| 5"            | 20A89                        | 20A29                                             | 20A40                                     |
| 特点<br>Feature | 制动轻便<br>Very easy to operate | 锁紧力大, 10000次寿命测试<br>Tough brake, 10000 times life | 侧面制动, 方便踩踏<br>Side braking, easy to pedal |

I  
20A


# 20A 系列 中型 Medium Duty

III  
20A


## 安装尺寸 Installation Drawing

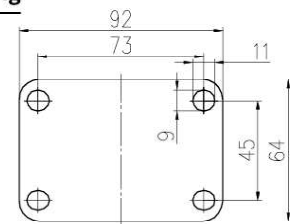

平底活动/ 刹车底板  
Plate of Swivel Caster

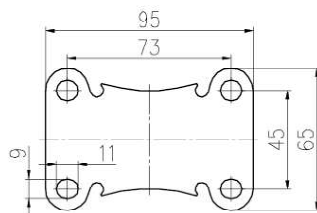

平底固定底板  
Plate of Rigid Caster



丝杆  
Threaded Stem



3-5"  
105-145 Kg


TPR产品行走测试标准按3.2km/h检测 TPR products are tested according to 3.2km/h walking test standard

|                                                                                           | <br>性能参数<br>Performance parameters |                                                                                            | <br>轮面材质<br>Wheel material | <br>轮片轴承<br>Bearing | <br>轮片直径<br>(inch)<br>Wheel diameter | <br>轮面宽度<br>(mm)<br>Tire width | <br>载重<br>(kg)<br>Capacity | <br>平底固定<br>Rigid | <br>装箱数<br>PCs/CTN | <br>平底活动<br>Swivel | <br>装箱数<br>PCs/CTN | <br>平底刹车<br>Swivel with brake | <br>装箱数<br>PCs/CTN | <br>丝杆活动<br>Threaded stem swivel | <br>装箱数<br>PCs/CTN | <br>丝杆刹车<br>Threaded stem swivel with brake | <br>装箱数<br>PCs/CTN |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----|
|                                                                                          | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      | 轮面硬度<br>Hardness<br>75±3A                                                                                   | 人造胶<br>Thermoplastic<br>elastomer on<br>plastic core                                                   | 单滚珠<br>Single<br>ball<br>bearing                                                                                        | 3"                                                                                                                | 32                                                                                                            | 75                                                                                                   | 20AB1-1375                                                                                            | 35                                                                                                    | 20A01-1375                                                                                            | 35                                                                                                               | 20A3B-1375                                                                                            | 30                                                                                                                  | 20A04-1375                                                                                            | 35                                                                                                                             | 20A7B-1375                                                                                            | 30 |
|                                                                                                                                                                            | 耐磨耐用 Durability                                                                                                     | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 100                                                                                                  | 20AB3-1377                                                                                            | 30                                                                                                    | 20A19-1377                                                                                            | 30                                                                                                               | 20A5B-1377                                                                                            | 25                                                                                                                  | 20A22-1377                                                                                            | 30                                                                                                                             | 20A9B-1377                                                                                            | 25 |
|                                                                                                                                                                            | 运行静音 Quiet Operation                                                                                                | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 110                                                                                                  | 20AB4-1378                                                                                            | 20                                                                                                    | 20A28-1378                                                                                            | 20                                                                                                               | 20A6B-1378                                                                                            | 15                                                                                                                  | 20A31-1378                                                                                            | 20                                                                                                                             | 20A1B-1378                                                                                            | 15 |
|                                                                                                                                                                            | 地面保护 Floor Protection                                                                                               | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |                                                                                                                     |                                                                                                       |                                                                                                                                |                                                                                                       |    |
|                                                                                         | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      | 轮面硬度<br>Hardness<br>75±3A                                                                                   | 人造胶<br>Thermoplastic<br>elastomer on<br>plastic core                                                   | 单滚珠<br>Single<br>ball<br>bearing                                                                                        | 3"                                                                                                                | 32                                                                                                            | 70                                                                                                   | 20AB1-1593                                                                                            | 35                                                                                                    | 20A01-1593                                                                                            | 35                                                                                                               | 20A3B-1593                                                                                            | 30                                                                                                                  | 20A04-1593                                                                                            | 35                                                                                                                             | 20A7B-1593                                                                                            | 30 |
|                                                                                                                                                                            | 耐磨耐用 Durability                                                                                                     | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average   |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 90                                                                                                   | 20AB3-1594                                                                                            | 30                                                                                                    | 20A19-1594                                                                                            | 30                                                                                                               | 20A5B-1594                                                                                            | 25                                                                                                                  | 20A22-1594                                                                                            | 30                                                                                                                             | 20A9B-1594                                                                                            | 25 |
|                                                                                                                                                                            | 运行静音 Quiet Operation                                                                                                | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen  |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 100                                                                                                  | 20AB4-1595                                                                                            | 20                                                                                                    | 20A28-1595                                                                                            | 20                                                                                                               | 20A6B-1595                                                                                            | 15                                                                                                                  | 20A31-1595                                                                                            | 20                                                                                                                             | 20A1B-1595                                                                                            | 15 |
|                                                                                                                                                                            | 地面保护 Floor Protection                                                                                               | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen  |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |                                                                                                                     |                                                                                                       |                                                                                                                                |                                                                                                       |    |
| <br> | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      | 轮面硬度<br>Hardness<br>75±3A                                                                                   | 橡胶<br>Rubber on<br>nylon core                                                                          | 单滚珠<br>Single<br>ball<br>bearing                                                                                        | 3"                                                                                                                | 32                                                                                                            | 90                                                                                                   | 20AB1-1538                                                                                            | 35                                                                                                    | 20A01-1538                                                                                            | 35                                                                                                               | 20A3B-1538                                                                                            | 30                                                                                                                  | 20A04-1538                                                                                            | 35                                                                                                                             | 20A7B-1538                                                                                            | 30 |
|                                                                                                                                                                            | 耐磨耐用 Durability                                                                                                     | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 110                                                                                                  | 20AB3-1539                                                                                            | 30                                                                                                    | 20A19-1539                                                                                            | 30                                                                                                               | 20A5B-1539                                                                                            | 25                                                                                                                  | 20A22-1539                                                                                            | 30                                                                                                                             | 20A9B-1539                                                                                            | 25 |
|                                                                                                                                                                            | 运行静音 Quiet Operation                                                                                                | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 130                                                                                                  | 20AB4-1540                                                                                            | 20                                                                                                    | 20A28-1540                                                                                            | 20                                                                                                               | 20A6B-1540                                                                                            | 15                                                                                                                  | 20A31-1540                                                                                            | 20                                                                                                                             | 20A1B-1540                                                                                            | 15 |
|                                                                                                                                                                            | 地面保护 Floor Protection                                                                                               | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |                                                                                                                     |                                                                                                       |                                                                                                                                |                                                                                                       |    |
|                                                                                         | 运行省力 Rollability                                                                                                    | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      | 轮面硬度<br>Hardness<br>75±3A                                                                                   | 橡胶<br>Rubber on<br>nylon core                                                                          | 单滚珠<br>Single<br>ball<br>bearing                                                                                        | 3"                                                                                                                | 32                                                                                                            | 90                                                                                                   | 20AB1-1044                                                                                            | 35                                                                                                    | 20A01-1044                                                                                            | 35                                                                                                               | 20A3B-1044                                                                                            | 30                                                                                                                  | 20A04-1044                                                                                            | 35                                                                                                                             | 20A7B-1044                                                                                            | 30 |
|                                                                                                                                                                            | 耐磨耐用 Durability                                                                                                     | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good      |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 110                                                                                                  | 20AB3-1045                                                                                            | 30                                                                                                    | 20A19-1045                                                                                            | 30                                                                                                               | 20A5B-1045                                                                                            | 25                                                                                                                  | 20A22-1045                                                                                            | 30                                                                                                                             | 20A9B-1045                                                                                            | 25 |
|                                                                                                                                                                            | 运行静音 Quiet Operation                                                                                                | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 130                                                                                                  | 20AB4-1046                                                                                            | 20                                                                                                    | 20A28-1046                                                                                            | 20                                                                                                               | 20A6B-1046                                                                                            | 15                                                                                                                  | 20A31-1046                                                                                            | 20                                                                                                                             | 20A1B-1046                                                                                            | 15 |
|                                                                                                                                                                            | 地面保护 Floor Protection                                                                                               | <div><div></div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellent |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |                                                                                                                     |                                                                                                       |                                                                                                                                |                                                                                                       |    |

咖啡色橡胶轮全新配方, 含胶量高, 材质软, 弹性性能优越, 静音效果佳, 有效保护地面, 浅色地面不留痕迹, 防轧铁屑效果好。  
The new formula of coffee rubber wheel has the advantages of high rubber content, soft material, excellent elasticity, good silence effect, effective protection of the ground, no traces left on the light ground, and good anti-puncturing effect of iron scraps.

## 外形尺寸 Overall Dimensions

| 尺寸 | 轮径  | 平底全高 | 丝杆全高 | 偏心距 | 旋转半径 | 旋转半径 |
|----|-----|------|------|-----|------|------|
| D  | D   | H    | H    | F   | r    | R    |
| 3" | 75  | 108  | 111  | 34  | 72   | 117  |
| 4" | 100 | 135  | 138  | 32  | 82   | 117  |
| 5" | 125 | 160  | 163  | 32  | 94.5 | 122  |

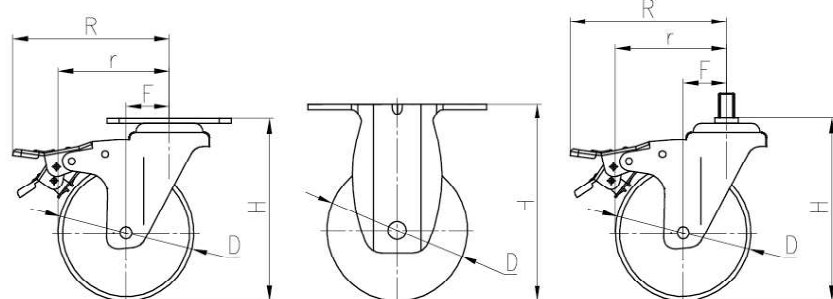

## 产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 底板厚度3.5mm Thickness of top plate 3.5mm
- 支架厚度2.5mm Thickness of bracket 2.5mm
- 防缠绕设计 Thread proof design


## 选配支架 Optional Brackets

| 款式<br>Brake   | 轻便金属刹<br>Easy-pedal brake    | 经典款金属刹<br>Classic metal brake                     | 边刹<br>Side brake                          |
|---------------|------------------------------|---------------------------------------------------|-------------------------------------------|
| 3"            | 20A87                        | 20A02                                             | 20A37                                     |
| 3.5"          | -                            | 20A11                                             | 20A38                                     |
| 4"            | 20A88                        | 20A20                                             | 20A39                                     |
| 5"            | 20A89                        | 20A29                                             | 20A40                                     |
| 特点<br>Feature | 制动轻便<br>Very easy to operate | 锁紧力大, 10000次寿命测试<br>Tough brake, 10000 times life | 侧面制动, 方便踩踏<br>Side braking, easy to pedal |


# 20A 系列 SERIES 中型 Medium Duty

III  
20A

## 安装尺寸 Installation Drawing

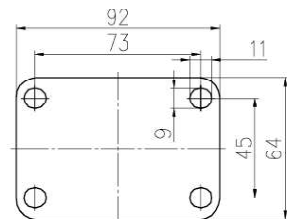

平底活动/ 刹车底板  
Plate of Swivel Caster

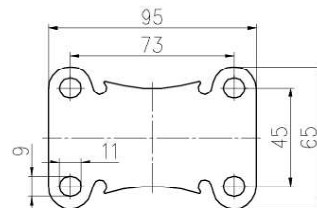

平底固定底板  
Plate of Rigid Caster




3-5"  
100-160 Kg

|    | <br>性能参数<br>Performance parameters | <br>轮面材质<br>Wheel material | <br>轮片轴承<br>Bearing | <br>轮片直径<br>(inch)<br>Wheel diameter | <br>轮面宽度<br>(mm)<br>Tire width | <br>载重<br>(kg)<br>Capacity | <br>平底固定<br>Rigid | <br>装箱数<br>PCs/CTN | <br>平底活动<br>Swivel | <br>装箱数<br>PCs/CTN | <br>平底刹车<br>Swivel with brake | <br>装箱数<br>PCs/CTN |    |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----|
|   | 运行省力 Rollability <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen                     | 轮面硬度<br>Hardness<br>>100D                                                                                   | 铸铁<br>Cast iron                                                                                        | 双滚珠<br>Ball bearing                                                                                                     | 3"                                                                                                                | 30                                                                                                            | 110                                                                                                  | 20AB1-1037                                                                                            | 35                                                                                                    | 20AC1-1037                                                                                            | 35                                                                                                               | -                                                                                                     | -  |
|                                                                                     | 耐磨耐用 Durability <div><div></div><div></div><div></div><div></div><div></div></div> 良好 Good                          |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 150                                                                                                  | 20AB3-1038                                                                                            | 30                                                                                                    | 20AC2-1038                                                                                            | 30                                                                                                               | -                                                                                                     | -  |
|                                                                                     | 运行静音 Quiet Operation <div><div></div><div></div><div></div><div></div><div></div></div> 不佳 Poor                     |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 160                                                                                                  | 20AB4-1039                                                                                            | 20                                                                                                    | 20AC3-1039                                                                                            | 20                                                                                                               | -                                                                                                     | -  |
|                                                                                     | 地面保护 Floor Protection <div><div></div><div></div><div></div><div></div><div></div></div> 不佳 Poor                    |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |    |
|  | 运行省力 Rollability <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen                     | 轮面硬度<br>Hardness<br>75D+3<br>耐温<br>Temp<br>-25°C~+230°C                                                     | 高温尼龙<br>High temperature nylon                                                                         | 双滚珠<br>Ball bearing                                                                                                     | 3"                                                                                                                | 32                                                                                                            | 100                                                                                                  | 20AB1-1663                                                                                            | 35                                                                                                    | 20AC1-1663                                                                                            | 35                                                                                                               | 20AC4-1663                                                                                            | 30 |
|                                                                                     | 耐磨耐用 Durability <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen                      |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 130                                                                                                  | 20AB3-1664                                                                                            | 30                                                                                                    | 20AC2-1664                                                                                            | 30                                                                                                               | 20AC5-1664                                                                                            | 25 |
|                                                                                     | 运行静音 Quiet Operation <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                  |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 145                                                                                                  | 20AB4-1665                                                                                            | 20                                                                                                    | 20AC3-1665                                                                                            | 20                                                                                                               | 20AC6-1665                                                                                            | 15 |
|                                                                                     | 地面保护 Floor Protection <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                 |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |    |
|  | 运行省力 Rollability <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen                     | 轮面硬度<br>Hardness<br>75D±3<br>耐温<br>Temp<br>-25°C~+280°C                                                     | 高温尼龙<br>High temperature nylon                                                                         | 双滚珠<br>Ball bearing                                                                                                     | 3"                                                                                                                | 32                                                                                                            | 100                                                                                                  | 20AB1-1666                                                                                            | 35                                                                                                    | 20AC1-1666                                                                                            | 35                                                                                                               | 20AC4-1666                                                                                            | 30 |
|                                                                                     | 耐磨耐用 Durability <div><div></div><div></div><div></div><div></div><div></div></div> 优秀 Excellen                      |                                                                                                             |                                                                                                        |                                                                                                                         | 4"                                                                                                                | 32                                                                                                            | 130                                                                                                  | 20AB3-1667                                                                                            | 30                                                                                                    | 20AC2-1667                                                                                            | 30                                                                                                               | 20AC5-1667                                                                                            | 25 |
|                                                                                     | 运行静音 Quiet Operation <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                  |                                                                                                             |                                                                                                        |                                                                                                                         | 5"                                                                                                                | 32                                                                                                            | 145                                                                                                  | 20AB4-1668                                                                                            | 20                                                                                                    | 20AC3-1668                                                                                            | 20                                                                                                               | 20AC6-1668                                                                                            | 15 |
|                                                                                     | 地面保护 Floor Protection <div><div></div><div></div><div></div><div></div><div></div></div> 一般 Average                 |                                                                                                             |                                                                                                        |                                                                                                                         |                                                                                                                   |                                                                                                               |                                                                                                      |                                                                                                       |                                                                                                       |                                                                                                       |                                                                                                                  |                                                                                                       |    |

\*尼龙高温轮载重参数是常温状态,高温下负载≤70%

## 外形尺寸 Overall Dimensions

| 尺寸 | 轮径  | 平底全高 | 偏心距 | 旋转半径 | 旋转半径  |
|----|-----|------|-----|------|-------|
| D  | D   | H    | F   | r    | R     |
| 3" | 75  | 108  | 34  | 72   | 110   |
| 4" | 100 | 135  | 32  | 82   | 110   |
| 5" | 125 | 160  | 32  | 94.5 | 115.5 |

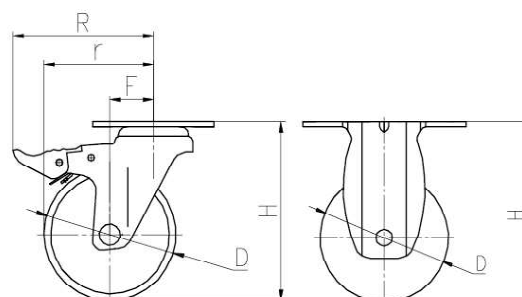

## 产品特点 Product Features

- 镀锌支架
- 底板厚度3.5mm
- 支架厚度2.5mm
- Galvanized bracket
- Thickness of top plate 3.5mm
- Thickness of bracket 2.5mm



## 新型尼龙耐高温材料

长效耐温




高强度耐磨

抗化学腐蚀



新型尼龙耐高温材料,可长效耐温230/280度,高强度耐磨,抗化学腐蚀,高温行驶地面不留痕迹,同时能解决酚醛占水发胀,高温起泡,开裂等缺点。


The high temperature resistant material of new nylon has long-term heat resistance 230/280°C, high strength, abrasion resistance, chemical corrosion resistance, no trace on the ground when driving at high temperature, and can solve the shortcomings of phenolic swelling, foaming and cracking at high temperature.

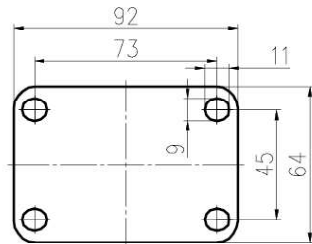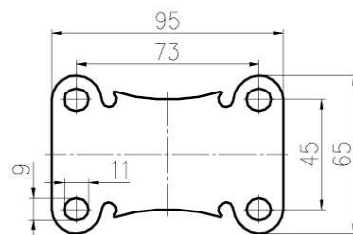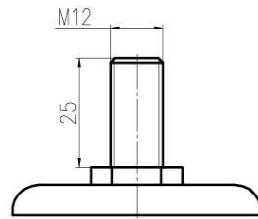20D 系列  
SERIES不锈钢(中型)  
Stainless Steel(Medium Duty)III  
20D安装尺寸  
Installation Drawing平底活动 刹车底板  
Plate of Swivel Caster平底固定底板  
Plate of Rigid Caster丝杆  
Threaded Stem3-5"  
80-150 KgIII  
20D

| PRPS |  | 性能参数<br>Performance parameters | 轮面材质<br>Wheel material | 轮片轴承<br>Bearing           | 轮片直径<br>(inch)<br>Wheel diameter                        | 轮面宽度<br>(mm)<br>Tire width       | 载重<br>(kg)<br>Capacity | 平底固定<br>Rigid | 装箱数<br>PCs<br>/CTN | 平底活动<br>Swivel | 装箱数<br>PCs<br>/CTN | 平底刹车<br>Swivel<br>with brake | 装箱数<br>PCs<br>/CTN | 丝杆活动<br>Threaded<br>stem swivel | 装箱数<br>PCs<br>/CTN | 丝杆刹车<br>Threaded<br>stem swivel<br>with brake | 装箱数<br>PCs<br>/CTN |
|------|--|--------------------------------|------------------------|---------------------------|---------------------------------------------------------|----------------------------------|------------------------|---------------|--------------------|----------------|--------------------|------------------------------|--------------------|---------------------------------|--------------------|-----------------------------------------------|--------------------|
|      |  |                                |                        |                           |                                                         |                                  |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
|      |  | 运行省力 Rollability               | 良好 Good                | 轮面硬度<br>Hardness<br>75±3A | 人造胶<br>Thermoplastic<br>elastomer<br>on<br>plastic core | 单滚珠<br>Single<br>ball<br>bearing | 3"                     | 32            | 80                 | 20D03-1375     | 30                 | 20D01-1375                   | 30                 | 20D02-1375                      | 30                 | 20D13-1375                                    | 30                 |
|      |  | 耐磨耐用 Durability                |                        |                           |                                                         |                                  | 4"                     | 32            | 90                 | 20D09-1377     | 25                 | 20D07-1377                   | 25                 | 20D08-1377                      | 25                 | 20D15-1377                                    | 25                 |
|      |  | 运行静音 Quiet Operation           |                        |                           |                                                         |                                  | 5"                     | 32            | 95                 | 20D12-1378     | 15                 | 20D10-1378                   | 15                 | 20D11-1378                      | 15                 | 20D17-1378                                    | 15                 |
|      |  | 地面保护 Floor Protection          |                        |                           |                                                         |                                  |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
|      |  | 运行省力 Rollability               | 优秀 Excellen            | 轮面硬度<br>Hardness<br>95±3A | 聚氨酯<br>Polyurethane<br>on<br>plastic core               | 双滚珠<br>Ball<br>bearing           | 3"                     | 32            | 110                | 20D03-1388     | 30                 | 20D01-1388                   | 30                 | 20D02-1388                      | 30                 | 20D13-1388                                    | 30                 |
|      |  | 耐磨耐用 Durability                |                        |                           |                                                         |                                  | 4"                     | 32            | 140                | 20D09-1389     | 25                 | 20D07-1389                   | 25                 | 20D08-1389                      | 25                 | 20D15-1389                                    | 25                 |
|      |  | 运行静音 Quiet Operation           |                        |                           |                                                         |                                  | 5"                     | 32            | 150                | 20D12-1390     | 15                 | 20D10-1390                   | 15                 | 20D11-1390                      | 15                 | 20D17-1390                                    | 15                 |
|      |  | 地面保护 Floor Protection          |                        |                           |                                                         |                                  |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
|      |  | 运行省力 Rollability               | 优秀 Excellen            | 轮面硬度<br>Hardness<br>95±3A | 聚氨酯<br>Polyurethane<br>on<br>plastic core               | 单滚珠<br>Single<br>ball<br>bearing | 3"                     | 32            | 100                | 20D03-1354     | 30                 | 20D01-1354                   | 30                 | 20D02-1354                      | 30                 | 20D13-1354                                    | 30                 |
|      |  | 耐磨耐用 Durability                |                        |                           |                                                         |                                  | 4"                     | 32            | 130                | 20D09-1355     | 25                 | 20D07-1355                   | 25                 | 20D08-1355                      | 25                 | 20D15-1355                                    | 25                 |
|      |  | 运行静音 Quiet Operation           |                        |                           |                                                         |                                  | 5"                     | 32            | 140                | 20D12-1356     | 15                 | 20D10-1356                   | 15                 | 20D11-1356                      | 15                 | 20D17-1356                                    | 15                 |
|      |  | 地面保护 Floor Protection          |                        |                           |                                                         |                                  |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |

III  
20D外形尺寸  
Overall Dimensions

| 尺寸 | 轮径  | 平底全高 | 丝杆全高 | 偏心距 | 旋转半径 | 旋转半径 |
|----|-----|------|------|-----|------|------|
| D  | D   | H    | H    | F   | r    | R    |
| 3" | 75  | 108  | 111  | 34  | 72   | 110  |
| 4" | 100 | 135  | 138  | 32  | 82   | 110  |
| 5" | 125 | 160  | 163  | 32  | 94.5 | 119  |

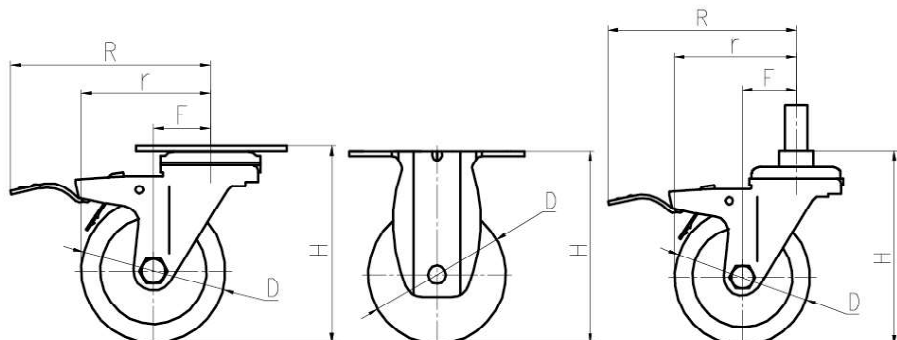产品特点  
Product Features

- 304不锈钢支架
- 底板厚度3mm
- 支架厚度3mm
- 防锈耐腐蚀


- 304 Stainless steel bracket
- Thickness of top plate 3mm
- Thickness of bracket 3mm
- Antirust & anti-corrosion

I  
20D


## 20D 系列 SERIES 不锈钢(中型) Stainless Steel(Medium Duty)

III  
20D


### 安装尺寸 Installation Drawing

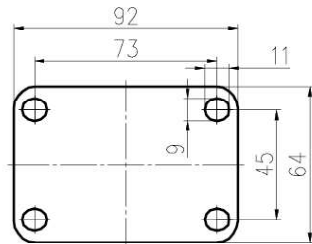

平底活动 刹车底板  
Plate of Swivel Caster

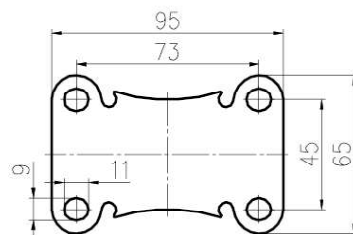

平底固定底板  
Plate of Rigid Caster

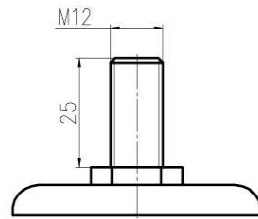

丝杆  
Threaded Stem



3-5"  
80-150 Kg


III  
20D

| 性能参数<br>Performance parameters                                                               | 轮面材质<br>Wheel material         | 轮片轴承<br>Bearing     | 轮片直径<br>(inch)<br>Wheel diameter | 轮面宽度<br>(mm)<br>Tire width | 载重<br>(kg)<br>Capacity | 平底固定<br>Rigid | 装箱数<br>PCs<br>/CTN | 平底活动<br>Swivel | 装箱数<br>PCs<br>/CTN | 平底刹车<br>Swivel<br>with brake | 装箱数<br>PCs<br>/CTN | 丝杆活动<br>Threaded<br>stem swivel | 装箱数<br>PCs<br>/CTN | 丝杆刹车<br>Threaded<br>stem swivel<br>with brake | 装箱数<br>PCs<br>/CTN |
|----------------------------------------------------------------------------------------------|--------------------------------|---------------------|----------------------------------|----------------------------|------------------------|---------------|--------------------|----------------|--------------------|------------------------------|--------------------|---------------------------------|--------------------|-----------------------------------------------|--------------------|
|                                                                                              |                                |                     |                                  |                            |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
| PH-B<br>运行省力 Rollability<br>耐磨耐用 Durability<br>运行静音 Quiet Operation<br>地面保护 Floor Protection | 高温尼龙<br>High temperature nylon | 双滚珠<br>Ball bearing | 3"                               | 32                         | 100                    | 20D03g-1663   | 30                 | 20D01g-1663    | 30                 | 20D02g-1663                  | 30                 | 20D13g-1663                     | 30                 | 20D14g-1663                                   | 30                 |
|                                                                                              |                                |                     | 4"                               | 32                         | 130                    | 20D09g-1664   | 25                 | 20D07g-1664    | 25                 | 20D08g-1664                  | 25                 | 20D15g-1664                     | 25                 | 20D16g-1664                                   | 25                 |
|                                                                                              |                                |                     | 5"                               | 32                         | 145                    | 20D12g-1665   | 15                 | 20D10g-1665    | 15                 | 20D11g-1665                  | 15                 | 20D17g-1665                     | 15                 | 20D18g-1665                                   | 15                 |
|                                                                                              |                                |                     |                                  |                            |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
| PH-B<br>运行省力 Rollability<br>耐磨耐用 Durability<br>运行静音 Quiet Operation<br>地面保护 Floor Protection | 高温尼龙<br>High temperature nylon | 双滚珠<br>Ball bearing | 3"                               | 32                         | 100                    | 20D03g-1666   | 30                 | 20D01g-1666    | 30                 | 20D02g-1666                  | 30                 | 20D13g-1666                     | 30                 | 20D14g-1666                                   | 30                 |
|                                                                                              |                                |                     | 4"                               | 32                         | 130                    | 20D09g-1667   | 25                 | 20D07g-1667    | 25                 | 20D08g-1667                  | 25                 | 20D15g-1667                     | 25                 | 20D16g-1667                                   | 25                 |
|                                                                                              |                                |                     | 5"                               | 32                         | 145                    | 20D12g-1668   | 15                 | 20D10g-1668    | 15                 | 20D11g-1668                  | 15                 | 20D17g-1668                     | 15                 | 20D18g-1668                                   | 15                 |
|                                                                                              |                                |                     |                                  |                            |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |
| PP-D<br>运行省力 Rollability<br>耐磨耐用 Durability<br>运行静音 Quiet Operation<br>地面保护 Floor Protection | 聚丙烯<br>Polypropylene           | 特灵灵<br>Derlin       | 3"                               | 32                         | 100                    | 20D03-1379    | 30                 | 20D01-1379     | 30                 | 20D02-1379                   | 30                 | 20D13-1379                      | 30                 | 20D14-1379                                    | 30                 |
|                                                                                              |                                |                     | 4"                               | 32                         | 130                    | 20D09-1380    | 25                 | 20D07-1380     | 25                 | 20D08-1380                   | 25                 | 20D15-1380                      | 25                 | 20D16-1380                                    | 25                 |
|                                                                                              |                                |                     | 5"                               | 32                         | 140                    | 20D12-1381    | 15                 | 20D10-1381     | 15                 | 20D11-1381                   | 15                 | 20D17-1381                      | 15                 | 20D18-1381                                    | 15                 |
|                                                                                              |                                |                     |                                  |                            |                        |               |                    |                |                    |                              |                    |                                 |                    |                                               |                    |

III  
20D

### 外形尺寸 Overall Dimensions

| 尺寸 | 轮径  | 平底全高 | 丝杆全高 | 偏心距 | 旋转半径 | 旋转半径 |
|----|-----|------|------|-----|------|------|
| D  | D   | H    | H    | F   | r    | R    |
| 3" | 75  | 108  | 111  | 34  | 72   | 110  |
| 4" | 100 | 135  | 138  | 32  | 82   | 110  |
| 5" | 125 | 160  | 163  | 32  | 94.5 | 119  |

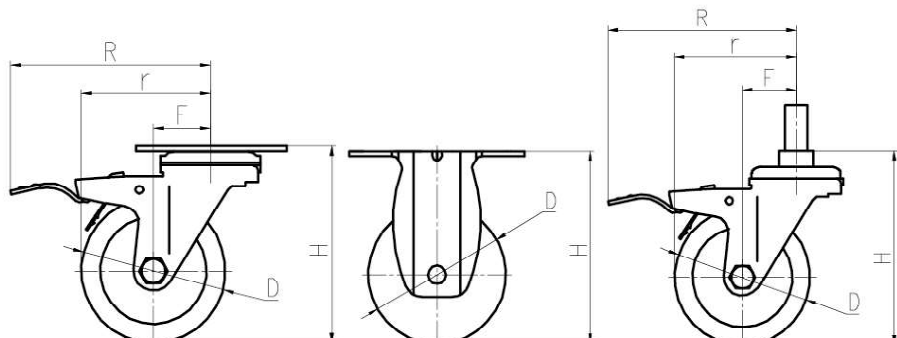

### 产品特点 Product Features

- 304不锈钢支架
- 底板厚度3mm
- 支架厚度3mm
- 防锈耐腐蚀


- 304 Stainless steel bracket
- Thickness of top plate 3mm
- Thickness of bracket 3mm
- Antirust & anti-corrosion

I  
20D

20E 系列 中型减震 Medium Shockproof

III  
20E

安装尺寸  
Installation Drawing

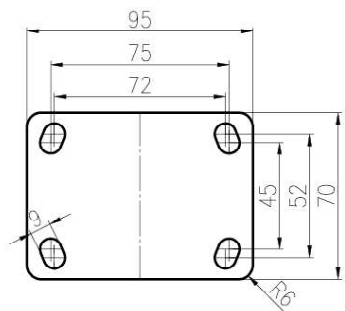

平底活动 刹车 / 固定底板  
Plate of Swivel / Rigid Caster



3-5"  
80-100 Kg

III  
20E



IV  
20E

| PRPS |  | 性能参数<br>Performance parameters |             | 轮面材质<br>Wheel material                         | 轮片轴承<br>Bearing            | 轮片直径<br>(inch)<br>Wheel diameter | 轮面宽度<br>(mm)<br>Tire width | 载重<br>(kg)<br>Capacity | 平底固定<br>Rigid | 装箱数<br>PCs/CTN | 平底活动<br>Swivel | 装箱数<br>PCs/CTN | 平底刹车<br>Swivel with brake | 装箱数<br>PCs/CTN | 弹簧预张力(kg)<br>Pretension of spring | 弹簧行程<br>(mm)<br>Spring distance |
|------|--|--------------------------------|-------------|------------------------------------------------|----------------------------|----------------------------------|----------------------------|------------------------|---------------|----------------|----------------|----------------|---------------------------|----------------|-----------------------------------|---------------------------------|
|      |  | 运行省力 Rollability               | 良好 Good     | 人造胶<br>Thermoplastic elastomer on plastic core | 单滚珠<br>Single ball bearing | 3"                               | 32                         | 80                     | 20E03-1593    | 16             | 20E01-1593     | 16             | 20E02-1593                | 16             | 25                                | 5.5                             |
|      |  | 耐磨耐用 Durability                | 一般 Average  |                                                |                            | 4"                               | 32                         | 90                     | 20E06-1594    | 12             | 20E04-1594     | 12             | 20E05-1594                | 12             | 25                                | 8.5                             |
|      |  | 运行静音 Quiet Operation           | 优秀 Excellen |                                                |                            | 5"                               | 32                         | 100                    | 20E09-1595    | 11             | 20E07-1595     | 11             | 20E08-1595                | 11             | 25                                | 10.5                            |
|      |  | 地面保护 Floor Protection          | 优秀 Excellen |                                                |                            |                                  |                            |                        |               |                |                |                |                           |                |                                   |                                 |

IV  
20E

外形尺寸  
Overall Dimensions

| 尺寸 | 轮径  | 平底全高  | 偏心距 | 旋转半径  | 旋转半径  |
|----|-----|-------|-----|-------|-------|
| D  | D   | H     | F   | r     | R     |
| 3" | 75  | 114.5 | 79  | 116.5 | 152   |
| 4" | 100 | 139   | 81  | 131   | 164   |
| 5" | 125 | 164.5 | 79  | 141   | 172.5 |

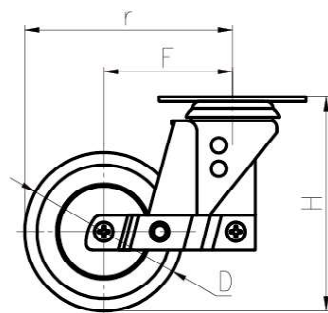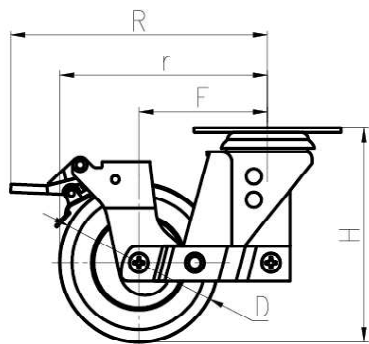

产品特点  
Product Features

- 镀铬支架 双弹簧
- 底板厚度3mm
- 支架厚度2.5mm
- 优质TPR注塑而成
- 保护底板,不留痕迹

- Chroumed bracket twin springs
- Thickness of top plate 3mm
- Thickness of bracket 2.5mm
- Injection with TPR
- Floor-protective,traceless