

70A

系列

SERIES

叉车用轮

Forklift Wheel



叉车行业用轮

Caster for Forklift Industry

2.5"-12"

230-1000 Kg

●

高端叉车用轮, 主要分为承重轮, 驱动力以及平衡轮等分类, 定制化项目产品。

A caster solution for high-end forklifts, with advantages in product standards and material technology. Customized projects are a priority for leading industry players.



产品特点 Product Features	
·适用于叉车	·Suitable for forklift
·改性材料	·Modified material
·高载重	·High capacity
·高耐磨	·Wearable

8-12"


500-800 Kg

	 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing
 	运行省力 Rollability  良好 Good	轮面硬度 Hardness 75D±3	增强聚丙烯 Modified polypropylene	双滚珠 Ball bearing
耐磨耐用 Durability  一般 Average				
运行静音 Quiet Operation  一般 Average				
地面保护 Floor Protection  一般 Average				

 轮片直径(inch) Wheel diameter	 轮面宽度(mm) Tire width	 载重(kg) Capacity	 轴承内径 Bearing diameter	 轴承外径 Bearing diameter	 型号 Order number	 装箱数 PCs/CTN
8" (200)	50	500	20	47	70A-1176	18
	50	500	25	52	70A-1275	18
10" (250)	50	600	25	52	70A-1177	10
12" (300)	50	800	25	52	70A-1178	8
	50	800	30	62	70A-1276	8

70B 系列 SERIES 叉车平衡轮 Balancing Caster for Forklift

安装尺寸 Installation Drawing

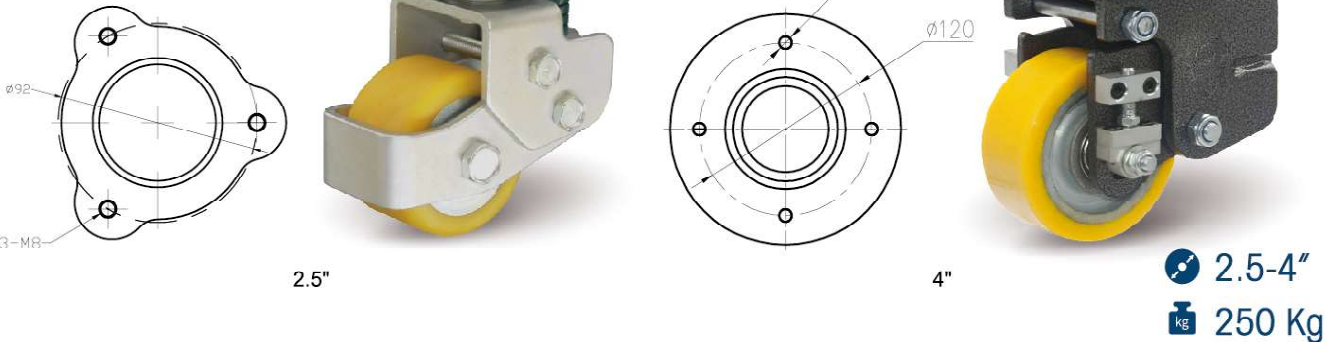


	 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	
 Power-SHEN	运行省力 Rollability	良好 Good	轮面硬度 Hardness 95±3A	铁芯聚氨酯 Polyurethane on cast iron core	精密滚珠轴承 Precision ball bearing
	耐磨耐用 Durability	优秀 Excellent			
	运行静音 Quiet Operation	优秀 Excellent			
	地面保护 Floor Protection	优秀 Excellent			

 轮片直径(inch) Wheel diameter	 轮面宽度(mm) Tire width	 载重(kg) Capacity	 平底活动 Swivel	 装箱数 PCs/CTN
2.5"	40	250	70B15-1722	8
4"	40	250	70B01-1637	4

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径
D	D	H	F	r
2.5"	70	122.5	20	65
4"	100	154	31	81

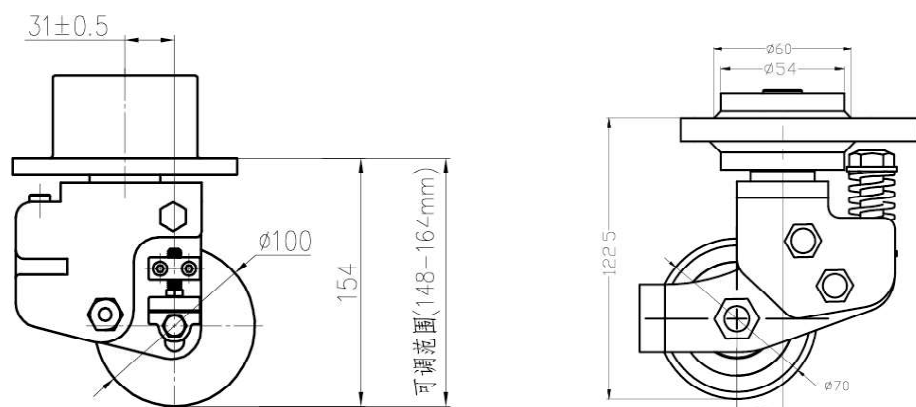

产品特点 Product Features

- 可调节高度148mm-164mm ·Height adjustable from 148 to 164mm
- 运行速度可达6km/h ·Running speed up to 6 km/h
- 喷塑/镀锌支架 ·Powder / Galvanized bracket
- 减震功效, 适合各种复杂路面 ·Shock absorption

70C 系列 SERIES 电动叉车轮 Wheels for Electrical Forklift

3-10"
350-1000 Kg

- 轮面材质 Wheel Material: 铁芯聚氨酯 Polyurethane on cast iron core
- 轮片硬度 Tire Hardness: 95A°

产品特点 Product Features

- 适用于叉车 ·Suitable for forklift
- 高载重 ·High capacity
- 高耐磨 ·Wearable

产品图片 Product image	型号 Order number	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重(kg) Capacity	轴承安装孔径 (mm) Bearing install aperture
PUCN	MDU 80×50/20-50	80	50	350	47
	MDU 80×60/20-60	80	60	380	47
	MDU 80×70/20-70	80	70	400	47
	MDU 80×80/20-80	80	80	450	47
	MDU 80×90/20-90	80	90	500	47
Power-SHEN	MDU 85×70/25-70	85	70	600	52

产品图片 Product image	型号 Order number	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重(kg) Capacity	轴承安装孔径 (mm) Bearing install aperture
PUCN	MDU 131×55.5 /25-55.5	131	55.5	700	52
Power-SHEN					

产品图片 Product image	型号 Order number	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重(kg) Capacity	轴承安装孔径 (mm) Bearing install aperture
PUCN	MDU 231×82.5 /40-5+3	231	82.5	1000	
Power-SHEN					

规格型号部分展示, 轮片材质可选用不同级别聚氨酯材料(详见⑩页前言部分浇筑聚氨酯材料介绍), 详情请与我们联系。
Models are shown in part. Different grades of polyurethane can be used for wheel materials (See the introduction of cast polyurethane materials in the preface of page ⑩ for details), please do not hesitate to contact us if you have any problem.