


45A 系列 SERIES 减震型 Shockproof

安装尺寸 Installation Drawing



平底活动 刹车 / 固定底板 Plate of Swivel / Rigid Caster

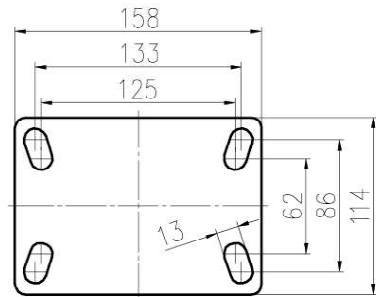


5-8" 300-550 Kg

IV 45A		 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	 轮片直径 (inch) Wheel diameter	 轮面宽度 (mm) Tire width	 载重 (kg) Capacity	 平底固定 Rigid	 装箱数 PCs/CTN	 平底活动 Swivel	 装箱数 PCs/CTN	 平底刹车 Swivel with brake	 装箱数 PCs/CTN	 弹簧预张力(kg) Pretension of spring	 弹簧行程 (mm) Spring distance
		运行省力 Rollability	一般 Average	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	360	45A02-0129	5	45A01-0129	5	45A19-0129	4	50	12
		耐磨耐用 Durability	优秀 Excellent			6"	50	440	45A04-0130	4	45A03-0130	4	45A20-0130	4	50	12
		运行静音 Quiet Operation	优秀 Excellent			8"	50	550	45A06-0131	4	45A05-0131	4	45A21-0131	3	50	12
		地面保护 Floor Protection	优秀 Excellent													
		运行省力 Rollability	良好 Good	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	340	45A02-1136	5	45A01-1136	5	45A19-1136	4	50	12
		耐磨耐用 Durability	优秀 Excellent			6"	48	420	45A04-1137	4	45A03-1137	4	45A20-1137	4	50	12
		运行静音 Quiet Operation	优秀 Excellent			8"	48	480	45A06-1138	4	45A05-1138	4	45A21-1138	3	50	12
		地面保护 Floor Protection	优秀 Excellent													
		运行省力 Rollability	良好 Good	铁芯橡胶 Rubber on cast iron core	双滚珠 Ball bearing	5"	48	300	45A02-1146	5	45A01-1146	5	45A19-1146	4	50	12
		耐磨耐用 Durability	良好 Good			6"	48	350	45A04-1147	4	45A03-1147	4	45A20-1147	4	50	12
		运行静音 Quiet Operation	优秀 Excellent			8"	48	400	45A06-1148	4	45A05-1148	4	45A21-1148	3	50	12
		地面保护 Floor Protection	优秀 Excellent													

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
5"	125	185	50	114.5	177.5
6"	150	197	50	127	185
8"	200	247	63	164.5	211.5

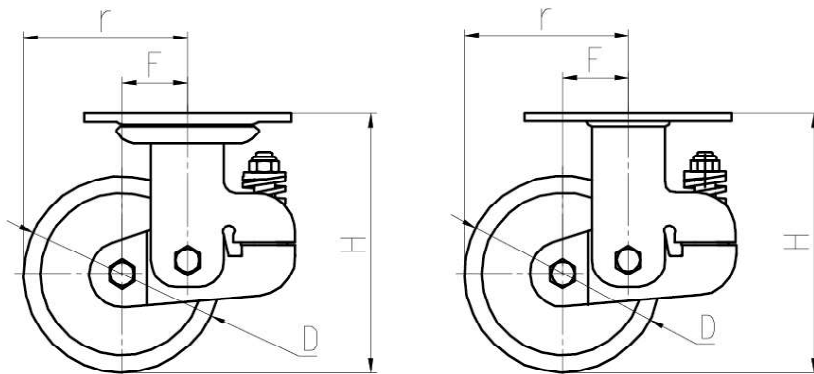

产品特点 Product Features

- 喷塑支架 双弹簧
- 底板6mm
- 支架6mm
- 牵引搬运时顺畅转动及平稳


- Spray coated, twin springs
- Thickness of top plate 6mm
- Thickness of bracket 6mm
- Smooth running while towed

选配轮片 Optional Wheels



45C 系列 SERIES 减震型 (经济型) Shockproof (Economical)

安装尺寸 Installation Drawing

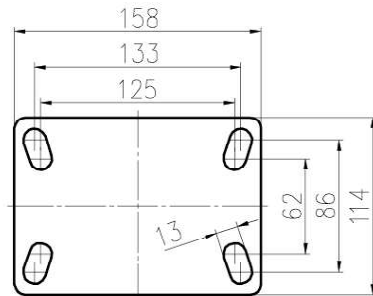

平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




5-8"
300-550 Kg

IV 45C	性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN	弹簧预张力(kg) Pretension of spring	弹簧行程 (mm) Spring distance
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	360	45C32-0129	5	45C31-0129	5	45C33-0129	4	35	12
	耐磨耐用 Durability			6"	50	440	45C35-0130	4	45C34-0130	4	45C36-0130	4	35	12
	运行静音 Quiet Operation			8"	50	550	45C38-0131	4	45C37-0131	4	45C39-0131	3	35	12
	地面保护 Floor Protection													
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	340	45C32-1136	5	45C31-1136	5	45C33-1136	4	35	12
	耐磨耐用 Durability			6"	48	420	45C35-1137	4	45C34-1137	4	45C36-1137	4	35	12
	运行静音 Quiet Operation			8"	48	480	45C38-1138	4	45C37-1138	4	45C39-1138	3	35	12
	地面保护 Floor Protection													
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	43	300	45C32-1683	5	45C31-1683	5	45C33-1683	4	35	12
	耐磨耐用 Durability			6"	45	350	45C35-1684	4	45C34-1684	4	45C36-1684	4	35	12
	运行静音 Quiet Operation			8"	45	400	45C38-1685	4	45C37-1685	4	45C39-1685	3	35	12
	地面保护 Floor Protection													
NRCB	运行省力 Rollability	铁芯橡胶 Rubber on cast iron core	双滚珠 Ball bearing	5"	48	300	45C32-1146	5	45C31-1146	5	45C33-1146	4	35	12
	耐磨耐用 Durability			6"	48	350	45C35-1147	4	45C34-1147	4	45C36-1147	4	35	12
	运行静音 Quiet Operation			8"	48	400	45C38-1148	4	45C37-1148	4	45C39-1148	3	35	12
	地面保护 Floor Protection													

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
5"	125	185	50	114.5	177.5
6"	150	197	50	127	185
8"	200	247	63	164.5	211.5

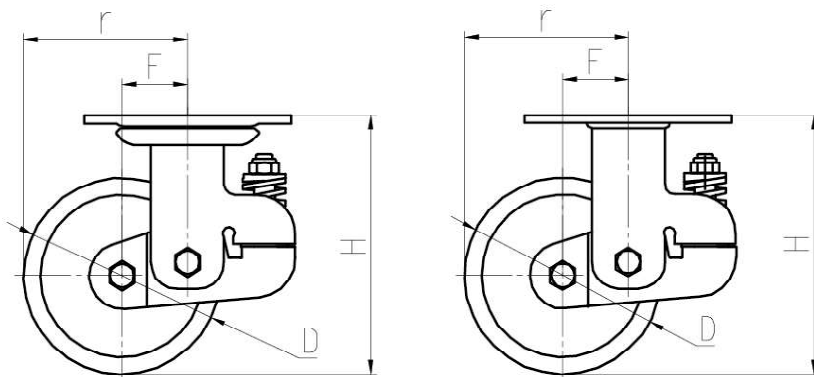

产品特点 Product Features

- 镀锌支架 单弹簧
- 底板5.25mm
- 支架5.25mm
- 牵引搬运时顺畅转动及平稳


- Galvanized bracket, single spring
- Thickness of top plate 5.25mm
- Thickness of bracket 5.25mm
- Smooth running while towed

选配轮片 Optional Wheels



45E 系列 SERIES 减震型 Shockproof

安装尺寸 Installation Drawing

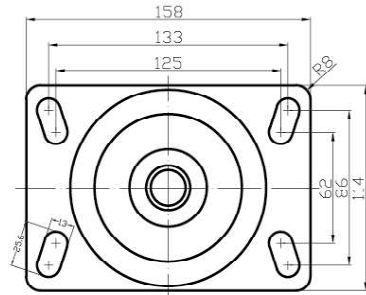

平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




5-6"
300-550 Kg

IV 45E	性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN	平底刹车 Swivel with brake	装箱数 PCs/CTN	弹簧预张力(kg) Pretension of spring	弹簧行程 (mm) Spring distance
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	360	45E02-0129	5	45E01-0129	5	45E03-0129	4	32	20
	耐磨耐用 Durability			6"	50	440	45E05-0130	4	45E04-0130	4	45E06-0130	4	32	20
	运行静音 Quiet Operation													
	地面保护 Floor Protection													
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	48	340	45E02-1136	5	45E01-1136	5	45E03-1136	4	32	20
	耐磨耐用 Durability			6"	48	420	45E05-1137	4	45E04-1137	4	45E06-1137	4	32	20
	运行静音 Quiet Operation													
	地面保护 Floor Protection													
PUCB	运行省力 Rollability	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing	5"	43	300	45E02-1683	5	45E01-1683	5	45E03-1683	4	32	20
	耐磨耐用 Durability			6"	45	350	45E05-1684	4	45E04-1684	4	45E06-1684	4	32	20
	运行静音 Quiet Operation													
	地面保护 Floor Protection													
NRCB	运行省力 Rollability	铁芯橡胶 Rubber on cast iron core	双滚珠 Ball bearing	5"	48	300	45E02-1146	5	45E01-1146	5	45E03-1146	4	32	20
	耐磨耐用 Durability			6"	48	350	45E05-1147	4	45E04-1147	4	45E06-1147	4	32	20
	运行静音 Quiet Operation													
	地面保护 Floor Protection													

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径	旋转半径
D	D	H	F	r	R
5"	125	195	60	124.5	187
6"	150	207	60	137	194

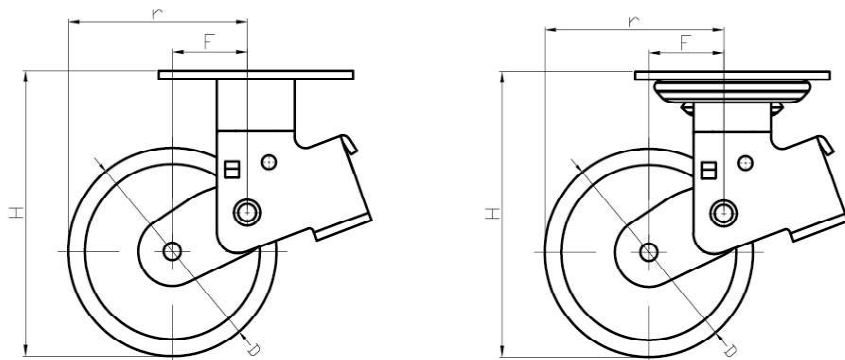


产品特点 Product Features

- 镀锌支架 双弹簧
- 底板5.25mm
- 支架5.25mm
- 牵引搬运时顺畅转动及平稳
- Galvanized bracket, double springs
- Thickness of top plate 5.25mm
- Thickness of bracket 5.25mm
- Smooth running while towed

选配轮片 Optional Wheels




选配底板 Optional Base Plate

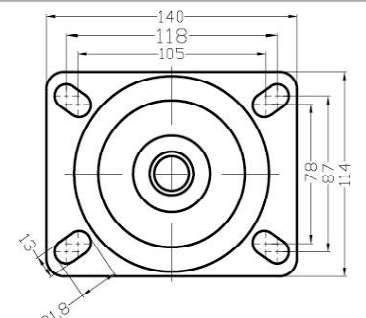


45F 系列 SERIES 减震型(单轮) Shockproof (Single Wheel)

安装尺寸
Installation Drawing



平底活动 / 固定底板
Plate of Swivel / Rigid Caster

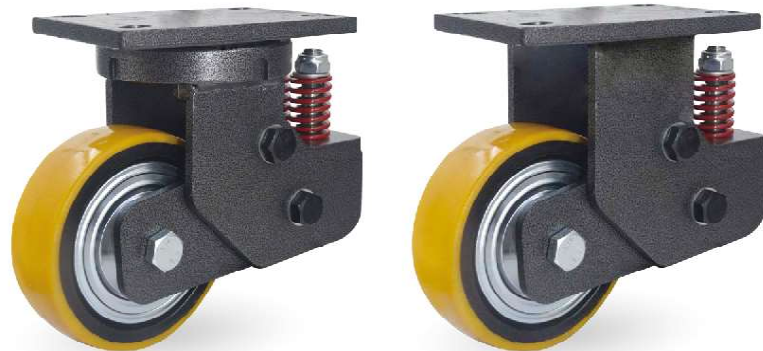


性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing
运行省力 Rollability ■ ■ ■ ■ 一般 Average 耐磨耐用 Durability ■ ■ ■ ■ ■ 优秀 Excellent 运行静音 Quiet Operation ■ ■ ■ ■ ■ 优秀 Excellent 地面保护 Floor Protection ■ ■ ■ ■ ■ 优秀 Excellent	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing

轮片直径(inch) Wheel diameter	轮面宽度(mm) Tire width	载重(kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN
5"	50	600	45F02-0206	2	45F01-0206	2
6"	50	800	45F05-0207	2	45F04-0207	2
8"	50	1000	45F08-0208	2	45F07-0208	2

外形尺寸
Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径
D	D	H	F	r
5"	125	208	60	125
6"	150	220	60	137
8"	200	270	70	172

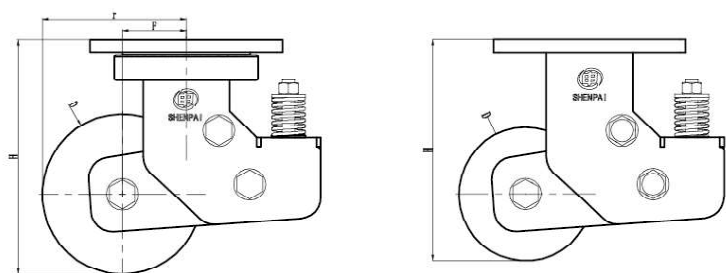


产品特点 Product Features

- 喷塑支架
- 底板12mm
- 支架8mm
- 牵引搬运时顺畅转动及平稳
- Spray coated, twin springs
- Thickness of top plate 12mm
- Thickness of bracket 8mm
- Smooth running while towed

45F 系列 SERIES 减震型(双轮) Shockproof (Double Wheels)

安装尺寸
Installation Drawing

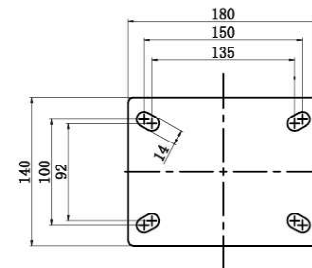

平底活动 / 固定底板
Plate of Swivel / Rigid Caster




性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing
运行省力 Rollability ■ ■ ■ ■ 一般 Average 耐磨耐用 Durability ■ ■ ■ ■ ■ 优秀 Excellent 运行静音 Quiet Operation ■ ■ ■ ■ ■ 优秀 Excellent 地面保护 Floor Protection ■ ■ ■ ■ ■ 优秀 Excellent	铁芯聚氨酯 Polyurethane on cast iron core	双滚珠 Ball bearing

轮片直径(inch) Wheel diameter	轮面宽度(mm) Tire width	载重(kg) Capacity	平底固定 Rigid	装箱数 PCs/CTN	平底活动 Swivel	装箱数 PCs/CTN
5"	50	1000	45F52-0206	2	45F51-0206	2
6"	50	1400	45F55-0207	2	45F54-0207	2
8"	50	1700	45F58-0208	2	45F57-0208	2

外形尺寸
Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径
D	D	H	F	r
5"	125	208	60	133
6"	150	220	60	150
8"	200	270	70	185

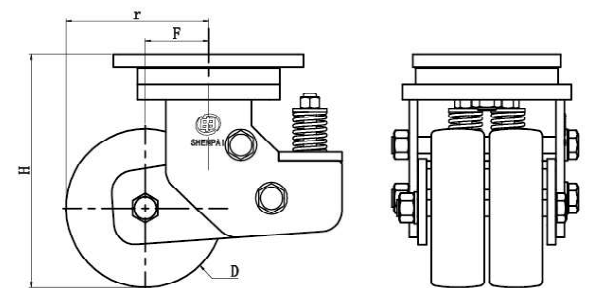

产品特点 Product Features

- 喷塑支架
- 底板12mm
- 支架10mm
- 双轮结构, 运行更平稳
- Spray coated, twin springs
- Thickness of top plate 12mm
- Thickness of bracket 10mm
- Dual wheel structure for smoother running