


25A 系列 SERIES 中重型(中空铆接款) Med-heavy Duty (Kingpinless)

安装尺寸 Installation Drawing

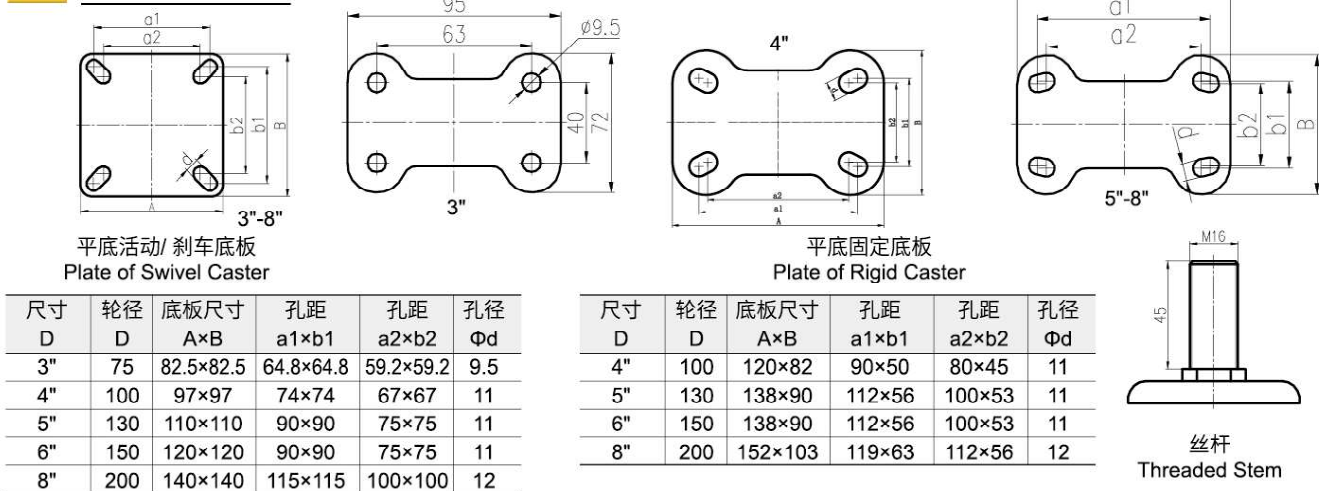

3-8"
80-550 Kg


性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs /CTN	平底固定刹车 Rigid with brake	装箱数 PCs /CTN	平底活动 Swivel	装箱数 PCs /CTN	平底刹车 Swivel with brake	装箱数 PCs /CTN	平底边刹 Swivel with brake	装箱数 PCs /CTN	丝杆活动 Threaded stem swivel	装箱数 PCs /CTN	丝杆刹车 Threaded stem swivel with brake	装箱数 PCs /CTN
NRSF	运行省力 Rollability	良好 Good	钢芯橡胶 Rubber on steel plate structure	法兰轴承 Flanged ball bearing	3"	25A03-1062	40	25A04-1062	40	25A01-1062	40	25A02-1062	40	-	-	-	-	-	-
	耐磨耐用 Durability	良好 Good			4"	25A12-1063	20	25A13-1063	18	25A10-1063	20	25A11-1063	18	25A72-1063	20	25A14-1063	20	25A15-1063	15
	运行静音 Quiet Operation	优秀 Excellen			5"	25A21-1064	12	25A22-1064	10	25A19-1064	12	25A20-1064	10	25A73-1064	10	25A23-1064	12	25A24-1064	10
	地面保护 Floor Protection	优秀 Excellen			6"	25A30-1065	8	25A31-1065	8	25A28-1065	8	25A29-1065	8	25A74-1065	8	25A32-1065	8	25A33-1065	8
					8"	25A39-1066	5	25A40-1066	4	25A37-1066	5	25A38-1066	4	25A75-1066	5	-	-	-	-
PUSF	运行省力 Rollability	良好 Good	钢芯聚氨酯 Polyurethane on steel plate structure	法兰轴承 Flanged ball bearing	3"	25A03-1052	40	25A04-1052	40	25A01-1052	40	25A02-1052	40	-	-	-	-	-	-
	耐磨耐用 Durability	优秀 Excellen			4"	25A12-1651	20	25A13-1651	18	25A10-1651	20	25A11-1651	18	25A72-1651	20	25A14-1651	20	25A15-1651	15
	运行静音 Quiet Operation	良好 Good			5"	25A21-1652	12	25A22-1652	10	25A19-1652	12	25A20-1652	10	25A73-1652	10	25A23-1652	12	25A24-1652	10
	地面保护 Floor Protection	良好 Good			6"	25A30-1653	8	25A31-1653	8	25A28-1653	8	25A29-1653	8	25A74-1653	8	25A32-1653	8	25A33-1653	8
					8"	25A39-1654	5	25A40-1654	4	25A37-1654	5	25A38-1654	4	25A75-1654	5	-	-	-	-
PASF	运行省力 Rollability	优秀 Excellen	钢芯尼龙 Nylon on steel plate structure	法兰轴承 Flanged ball bearing	3"	25A03-1057	40	25A04-1057	40	25A01-1057	40	25A02-1057	40	-	-	-	-	-	-
	耐磨耐用 Durability	优秀 Excellen			4"	25A12-1676	20	25A13-1676	18	25A10-1676	20	25A11-1676	18	25A72-1676	20	25A14-1676	20	25A15-1676	15
	运行静音 Quiet Operation	可接受 Fair			5"	25A21-1677	12	25A22-1677	10	25A19-1677	12	25A20-1677	10	25A73-1677	10	25A23-1677	12	25A24-1677	10
	地面保护 Floor Protection	可接受 Fair			6"	25A30-1678	8	25A31-1678	8	25A28-1678	8	25A29-1678	8	25A74-1678	8	25A32-1678	8	25A33-1678	8
					8"	25A39-1679	5	25A40-1679	4	25A37-1679	5	25A38-1679	4	25A75-1679	5	-	-	-	-

*V3.1版本后,因更高要求的企业标准实施,部分标识载重略有调整。

*V3.1版本起钢芯尼龙、聚氨酯轮毂变更。 Change of steel core nylon and polyurethane hub from V3.1.

外形尺寸 Overall Dimensions

尺寸 D	轮径 D	平底全高 H	丝杆全高 H	偏心距 F	旋转半径 r	旋转半径 R
3"	75	100	-	23.5	62	85.5
4"	100	144	144	35	86	109.5
5"	130	172	172	38	103	121
6"	150	197	197	40	116	119
8"	200	250	-	58	158	158

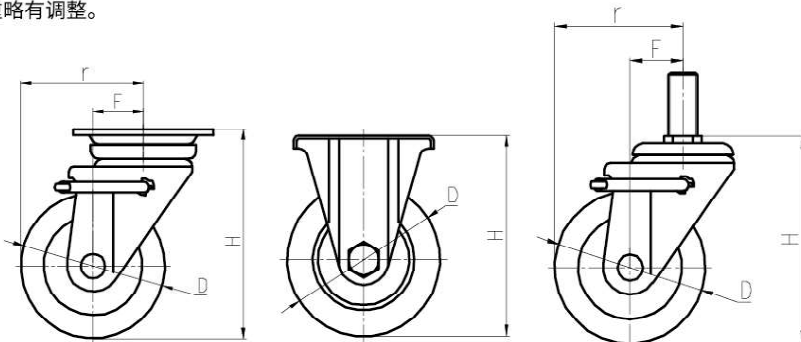

产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 中空式设计 hollow bracket design
- 抗冲击 Shock proof
- 转动轻便 Easy to twirl
- 日式JIS标准 JIS standard

板材厚度 Thickness of steel plate


尺寸 Wheel size	底板厚度 Thickness of top plate	支架厚度 Thickness of bracket
3"	2.5mm	2.5mm
4"-6"	4mm	3mm
8"	4mm	4mm

选配轮片 Optional Wheels



25X 系列 SeriES 中重型(经济配套款) Med-heavy Duty (Economical)

安装尺寸 Installation Drawing

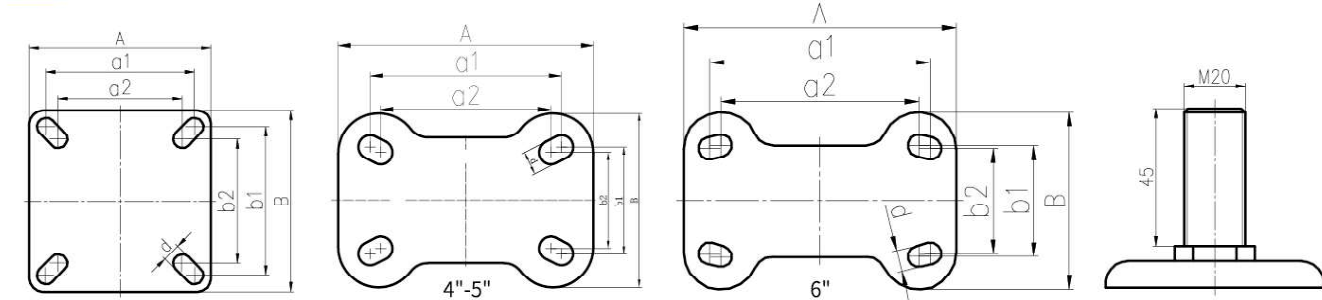

平底活动/ 刹车底板
Plate of Swivel Caster

平底固定底板
Plate of Rigid Caster

丝杆
Threaded Stem

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a1×b1	孔距 a2×b2	孔径 Φd
4"	100	97×97	74×74	67×67	11
5"	125	110×110	90×90	75×75	11
6"	150	120×120	90×90	75×75	11

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a1×b1	孔距 a2×b2	孔径 Φd
4"	100	120×82	90×50	80×45	11
5"	125	120×82	90×50	80×45	11
6"	150	138×90	112×56	100×53	11




5-6"
100-230 Kg

性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs /CTN	平底固定刹车 Rigid with brake	装箱数 PCs /CTN	平底活动 Swivel	装箱数 PCs /CTN	平底刹车 Swivel with brake	装箱数 PCs /CTN	丝杆活动 Threaded stem swivel	装箱数 PCs /CTN	丝杆刹车 Threaded stem swivel with brake	装箱数 PCs /CTN
						25X03-1078	20	25X04-1078	18	25X01-1078	20	25X02-1078	18	-	-	-	-
PUPB	运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	良好 Good 良好 Good 良好 Good 良好 Good	轮面硬度 Hardness 95±3A 聚氨酯 Polyurethane on plastic core	双滚珠 Ball bearing	4"	32	100	25X12-1079	12	25X13-1079	10	25X10-1079	12	25X11-1079	10	25XA4-1079	12
					5"	35	150	25X21-1080	8	25X22-1080	8	25X19-1080	8	25X20-1080	8	25XA0-1080	8
					6"	38	230										
PUPB	运行省力 Rollability 耐磨耐用 Durability 运行静音 Quiet Operation 地面保护 Floor Protection	良好 Good 良好 Good 良好 Good 良好 Good	轮面硬度 Hardness 95±3A 聚氨酯 Polyurethane on plastic core	双滚珠 Ball bearing	5"	35	150	25X12-1084	12	25X13-1084	10	25X10-1084		25X11-1084	10	25XA4-1084	
					6"	38	230	25X21-1085	8	25X22-1085	8	25X19-1085		25X20-1085	8	25XA0-1085	

外形尺寸 Overall Dimensions

尺寸 D	轮径 D	平底全高 H	丝杆全高 H	偏心距 F	旋转半径 r	旋转半径 R
4"	100	144	-	35	86	109.5
5"	125	172	172	38	107	121
6"	150	197	197	40	117	119

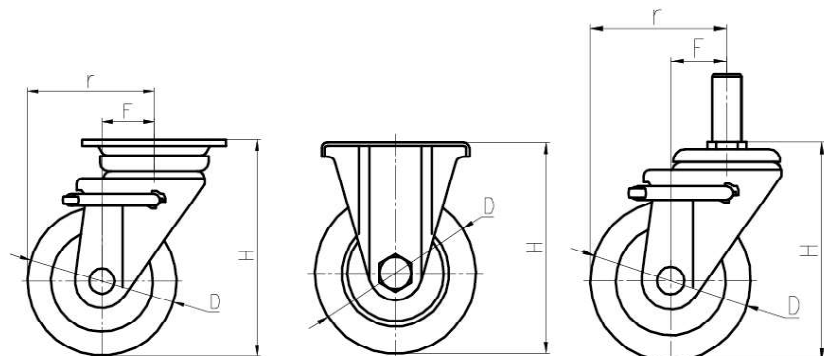


产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 底板4mm Thickness of top plate 4mm
- 支架3mm Thickness of bracket 3mm

65B 系列 发泡轮 Elasticity Foam

安装尺寸
Installation Drawing

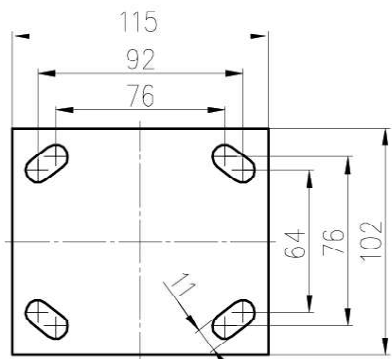

平底活动 刹车 / 固定底板
Plate of Swivel / Rigid Caster




6-10"
150-250 Kg

	 性能参数 Performance parameters		 轮面材质 Wheel material		 轮片轴承 Bearing								
	运行省力 Rollability	良好 Good	轮面硬度 Hardness 72±3A	发泡轮 Rubber on steel plate structure	双滚珠 Ball bearing								
	耐磨耐用 Durability	良好 Good											
	运行静音 Quiet Operation	优秀 Excellent											
	地面保护 Floor Protection	优秀 Excellent											
	轮片直径(inch) Wheel diameter		轮面宽度(mm) Tire width		载重(kg) Capacity		平底固定 Rigid		装箱数 PCs/CTN		平底活动 Swivel		装箱数 PCs/CTN
6"	55	150	65B02-1502	8	65B01-1502	8							
8"	63	200	65B07-1503	5	65B06-1503	5							
10"	63	250	65B12-1504	3	65B11-1504	3							

外形尺寸
Overall Dimensions

尺寸	轮径	平底全高	偏心距	旋转半径
D	D	H	F	r
6"	150	190	44	120.5
8"	200	250	50	151
10"	250	305	60	186

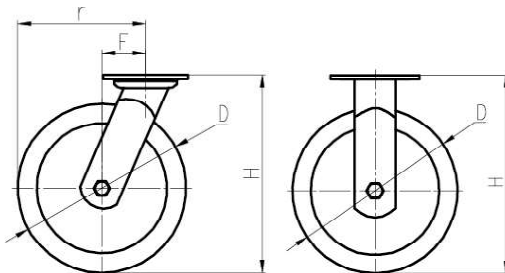


产品特点
Product Features

- 彩镀支架
- 底板6mm
- 支架6mm
- 优质橡胶轮面
- 弹力静音
- Colour galvanized
- Thickness of top plate 6mm
- Thickness of bracket 6mm
- High quality rubber for wheel tread
- Silent running

66A 系列 脚手架轮 Scaffold Caster

安装尺寸
Installation Drawing

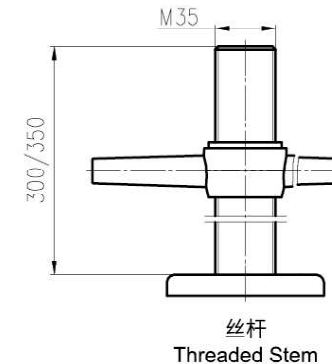

5-6"
200-330 Kg




		性能参数 Performance parameters		轮面材质 Wheel material		轮片轴承 Bearing	
 PUSF	运行省力 Rollability		良好 Good	轮面硬度 Hardness 95±3A	钢芯聚氨酯 Polyurethane on steel plate structure	法兰轴承 Flanged ball bearing	
	耐磨耐用 Durability		优秀 Excellent				
	运行静音 Quiet Operation		良好 Good				
	地面保护 Floor Protection		良好 Good				
 NRSF	运行省力 Rollability		良好 Good	轮面硬度 Hardness 75±3A	钢芯橡胶 Rubber on steel plate structure	法兰轴承 Flanged ball bearing	
	耐磨耐用 Durability		良好 Good				
	运行静音 Quiet Operation		优秀 Excellent				
	地面保护 Floor Protection		优秀 Excellent				

	产品 Product		轮片直径(inch) Wheel diameter		轮面宽度(mm) Tire width	载重(kg) Capacity		丝杆刹车 Threaded stem swivel with brake		装箱数 PCs/CTN
 PUSF	5"		35		280	66A03-1652	4			
	6"		38		330	66A01-1653	4			
 NRSF	5"		40		200	66A03-1064	4			
	6"		43		250	66A01-1065	4			

外形尺寸
Overall Dimensions

尺寸	轮径	平底全高	偏心距
D	D	H	F
5"	130	169	37
6"	150	192	40

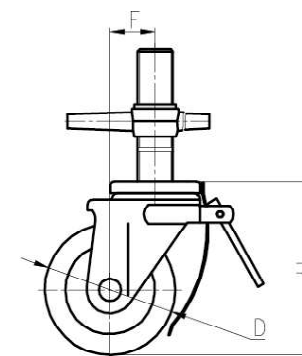

产品特点
Product Features

- 适用于脚手架
- 镀锌支架
- 丝杆长度可选配
- 钢芯骨架, 防腐耐用
- Suitable for scaffold
- Galvanized bracket
- Customized stem length
- Steel plate core