



江苏申牌万向轮有限公司
JIANGSU SHENPAI CASTER CO.,LTD.

产品目录书

Jiangsu Shenpai Caster Co.,Ltd.

目录 Contents

微型系列(10系列)	1
轻型系列(15系列)	3
中型系列(20系列)	5
中型 - 1款(201系列)	5
中型 - 2款(202系列)	7
中型 - 3款(203系列)	9
中重型系列(25系列)	11
中重型- 1款(251系列)	11
中重型- 2款(252系列)	13
低重心系列(30系列)	15
低重型- 1款(301系列)	15
低重型- 2款(302系列)	17
重型IC系列(35系列)	19
重型淬火C系列(40系列)	21
重型防撞VC系列(45系列)	23
超重型系列(50系列)	25
超重S4双轮系列(55系列)	26
避震轮系列(60系列)	27
超市购物车轮系列(65系列)	28
静音医疗轮系列(70系列)	29
商务机械轮系列(75系列)	30

营销大楼 江苏申牌万向轮有限公司是“申牌”脚轮的专业制造商，具备非常强大的优势。

企业简介

第一、环境与交通：公司位于江阴市璜土镇澄常工业园内，地区环境优美，周边交通便利，紧邻江苏常州港和沪宁高速公路，处于中国脚轮使用量最大的长三角中心地带，我司快捷的产品流通优势更是突显出来。

第二、技术与生产成熟：公司自1993年创立以来，十多年来积累了丰富的专业知识，不断开发、研究、创新，已研制出十大系列数千个品种，出口产品中包括美式、日式、欧式等脚轮，还可根据客户的样品及图纸定制产品；在技术日益成熟的今天，公司仍不断的进行技术革新，生产工艺也不断的在完善，设备基础雄厚，臭味相投扩大生产规模，提高生产效率，使产品更好的贴近市场与客户，为进军国际市场提供坚实的后盾。

第三、品质：公司已通过ISO9001：2000国际质量体系认证，公司有完善的检测检验设备，严谨的品管制度，为产品的使用提供信心。

第四、企业荣誉：企业获得江苏省著名商标荣誉，更是重合同守信用企业。

第五、营销理念超前、服务高效：在国内市场，品牌服务商云集，能为客户提供高效、便捷、全方位的服务；在国际市场上，公司以稳定的产品品质、及时快捷的交货速度，成功配套丰田、通用、雅马哈等国际大公司，同时产品已成功出口东南亚、欧美等国。

第六、品牌的目标：做中国人自己的脚轮品牌，让中国人自己研发、制造的脚轮转遍全球！

致尊敬的使用者：请到当地我们的“唯一指定品牌服务商”处进行本品牌产品的购买和咨询，我们将实行质量三包并进行全程跟踪服务，若通过不正当途径购买的产品，我们不负售后相关事宜！唯一指定的品牌服务商有我司正式的授权文件证书，请使用及购买者注意查看

我们的品牌事业需要您的支持与参与，我们期待您的加盟！为实现品牌利益共享而携手同心！

Brief introduction

Jiangsu Shenpai Caster Co., Ltd is a professional manufacturer of "Shenpai" casters, it has a very strong advantage:

1.Environment and traffic: The company is located in Huangtu Industrial Park, beautiful environment, convenient transportation, close to Port of Changzhou and Shanghai-Nanjing Expressway. It is in center of the Yangtze River Delta the use amount of caster is largest in Chinese, so the logistics is our company's strong advantage.

2.Mature technology and production: Since its inception in 1993, the company has accumulated a wealth of expertise during more than ten years. By the development, research and innovation, we have developed several thousands casters in five series. The export casters includes American duty casters, Japanese duty casters, European duty casters and so on. We also can manufacture the new product by the Clients samples and drawings; In the increasingly mature technology today, The company has continued to carry out technological innovations and improving the manufacturing process, actively expand the production scale and improve production efficiency, make better products closer to markets and customers, in order to enter the international market to provide a solid backing.

3.Quality: The company has passed through ISO9001:2000 Quality Assurance System. We have well-tested detection equipment, strict quality control system for the use of products that provide confidence.

4.Honors: "Shenpai", the registered trademark of our company, is famous in Jiangsu Province, our company is business contracts and keeping promises enterprise.

5.Advanced marketing idea, efficient service: In the domestic market, many sales agents can provide high efficient and convenient service for customers; In the international market, by the stable product quality and the fast pace of delivery, we supplied the product for TOYOTA, GE, YAMAHA and so on. Also, our product has been successfully exported to Europe, America and other countries in Southeast Asia.

6.Brand objectives: We do Chinese own brand of casters, by Chinese own R & D and manufacturing, send the casters to every corner of the world!

To dear user: If you need our product, please go to local sales agent to purchase and consultation; if you purchased the product by improper way, we will not be responsible for it.

The local sales agents we appointed in every city has the official certificate of authorization, please view it.

Our brand cause need your support and participation, we look forward to your join. To achieve the interests of brand by hand in hand.

使用脚轮是为了减轻劳动强度，提高工作效率。根据应用的方式、条件和要求(方便、省力、耐用)正确地选择适合您使用的脚轮。请注意以下几点：

承载重量

(1) 承载重量计算 $T = \frac{E+Z}{M}$

T=每只脚轮承载的重量


E=运输工具的重量

Z=移动物体的重量


M=轮子有效承载数量

(应考虑位置、重量分布不均的因素)

(2) 轮子有效承载数量(M)如下图：

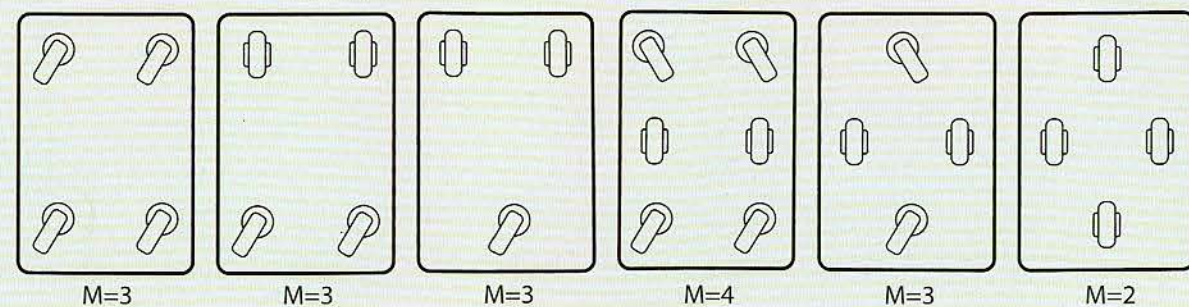

(3) 选择承重时要按最大支撑点处脚轮的承重量计算。脚轮具体受力支撑点如下图，P2为最重支撑点。

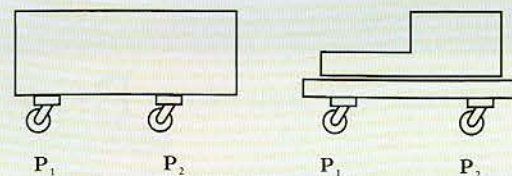

灵活性

- (1) 脚轮应灵活、轻松并耐用，其转动部位(脚架转动，轮子滚动)应选用摩擦系数小的材料或经特殊工艺自理后组装的配件(如滚珠轴承或淬火处理)
- (2) 脚架的偏心距越大转向越灵活，但承载能力相应降低。
- (3) 轮子的直径越大推动越省力，并能更好地保护地面。轮子大比小转动缓慢，不易发热变形，更耐用。在安装高度允许的条件下尽可能选择大直径的轮子。

移动速度

脚轮速度的要求：在常温环境下，在平坦的地面上，不高于步行速度4KM/H，并有一定停歇的工作状态。

使用环境

选择时应考虑地面材料、障碍物、残留物或特殊环境(如铁屑、高温、低温、酸性大、碱性大、油液和化学溶剂以及要求抗静电的场所)。在特殊环境中使用的应选择用特殊材料制成的脚轮。

Using casters can reduce the work force and increase the work efficiency. The right caster should be chosen by the manner of application, condition and request (for example facility, labour saving, durability). The factor must be considered as follows:

THE LOAD CAPACITY

(1) Load: $T = \frac{E+Z}{M}$

T= each caster load


E= the weight of the vehicle

Z= the weight of moving object


M=efficient load casters quantity

(the position and different heavy distribution must be considered)

(2) Efficient load caster quantity as follows

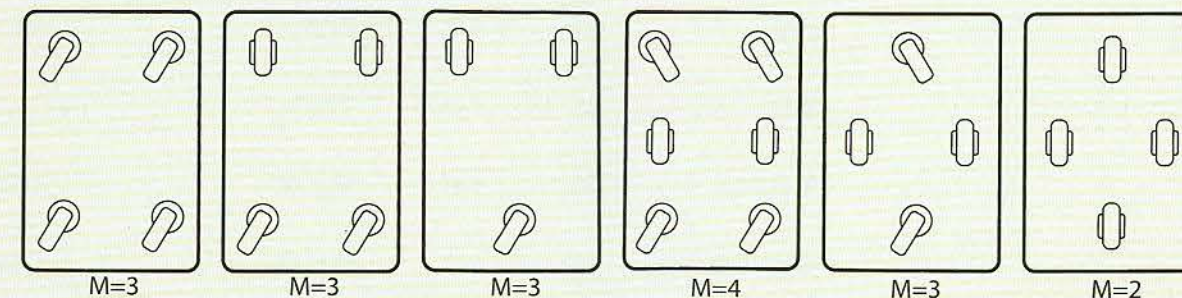

(3) The casters load at the position of maximum should be considered when choose load capacity. Concrete load position and maximum position (P2) as follows

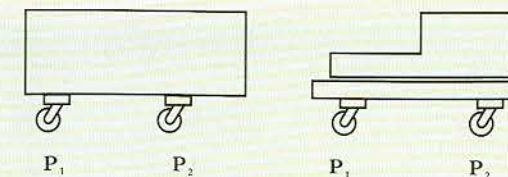

AGILITY

- (1) The part of turn (frame turn, wheel rolling) should choose the mini, friction material, or the Accessories Which be made by a special thechnology, such as pin ball bearing or quenched in order that the casters will be used easy and durable.
- (2) The more bigger the eccentricity is , the better the agility bocomes.

MOVING SPEED

The request of caster speed: at the normal temperature and on the smooth floor, the speed should be lower than 4km/h of walk and there is static interval during the work time.

APPLIED ENVIRONMENT

The floor material, barrier, leftover and the special environment, such as scrap iron, high or low temperature, great acidity and alkalescece, oil liquor, chemistry solvent and anti-static-electricity, should be considered when choose the caster, Caster used in special environment should be made of special materials.

SHENPAI Caster

货号编码说明表

PRODUCT NUMBER EXPLAIN

表面处理方式		系 列		款 式	规 格 型 号		材 质		轴 承		轮 径		轮 形	
镀锌	DX	微型	10	1-9	平底活动	PH	塑芯聚氨酯	03	轴套	A	1寸	025	圆弧轮面	HM1
镀铬	DG	轻型	15	1-9	螺丝活动	LH	塑芯橡塑	06	联体轴承	B	1.2寸	030	直角平面	PM1
电泳	DY	中型	20	1-9	插杆活动	CH	塑芯人造胶	09	单轴承	C	1.5寸	040	烽火轮面	FH1
烤漆	KQ	中重型	25	1-9	顶孔活动	DH	塑芯尼龙	13	双轴承	D	2寸	050	防滑轮面	FH2
喷塑	PS	低重心	30	1-9	固定	GD	尼龙	16	封闭式轴承	E	2.5寸	065	胎面花纹轮面	LT1
		重型 IC型	35	1-9	平刹	PSS(A-B-C)	钢芯尼龙	19	滚针	F	3寸	075		
		重型C型	40	1-9	螺丝刹	LSS	铝芯尼龙	23	无轴承	G	3.5寸	088		
		重型VC型	45	1-9	插杆刹	CSS	铁芯尼龙	26			4寸	100		
		超重DD型	50	1-9	顶孔刹	DSS	钢芯聚氨酯	29			5寸	125		
		超重S4双轮	55	1-9	遥杆平刹	PYS	铝芯聚氨酯	33			6寸	150		
		避震轮	60	1-9	遥杆螺丝刹	LYS	铁芯聚氨酯	36			8寸	200		
		超市购物	65	1-9	遥杆插杆刹	CYS	钢芯橡胶	39			10寸	250		
		医疗器械	70	1-9	遥杆固定刹	DYS	铝芯橡胶	43			12寸	300		
		商务机械	75	1-9	边刹	BDS	铁芯橡胶	46						
		纺织轮	80	1-9	后刹	HSS	铸铁	49						
		叉车轮	85	1-9	中控刹	ZDS	聚丙烯	53						
					固定刹	GDS	酚醛树脂	56						
					插杆固定	CG	防静电人造胶	59						
					单刹	KQ								

SHENPAI Caster

配套轴承、各种单轮、各种刹车脚轮

配套轴承 Bearings



滚针轴承
Needle bearing



一体式滚珠轴承
Annular ball bearing



滚珠轴承
Ball bearing



封闭式滚珠轴承
Enclosed ball bearing

各种单轮 Various wheels



超级尼龙轮
Super Nylon



高强度尼龙轮
High-strength Nylon



高强度聚氨酯轮
High-strength Polyurethane



超级人造胶轮
Super Artificial Rubber



超级聚氨酯
Super Polyurethane



铝芯尼龙轮
Aluminium-core Nylon



超市购物车轮
Elevator wheel




钢芯聚氨酯轮
Steel-core Polyurethane



钢芯弹力橡胶轮
Steel-core Rubber




钢芯橡胶轮
Steel-core Rubber



钢芯尼龙轮
Steel-core Nylon



酚醛轮
Phenolic



超级聚氨酯轮
Super Polyurethane



高强度聚氨酯防滑轮
High-strength PU



高强度聚氨酯烽火轮
High-strength PU



铁芯尼龙轮
Iron-core Nylon



铁芯聚氨酯轮(弧形)
Iron-core Polyurethane



铁芯聚氨酯轮(扁)
Iron-core PU (flat)



铝芯聚氨酯轮
Aluminium-core Polyurethane



铝芯弹力橡胶轮
Aluminium-core elasticity Rubber



超级尼龙轮
Iron-core Polyurethane



铁芯聚氨酯轮
Iron-core Rubber



叉车轮
Forklift



尼龙叉车轮
Nylon forklift

BEARINGS, VARIOUS WHEELS, VARIOUS BRAKE CASTERS

各种刹车脚轮 Various brake casters



DX151PSS03B050PM1



DX201PSS-A09B100PM1



DX201PSS-C03B100PM1



DG701CSS09C100PM1



DX201PSS-B13B100PM1



DY301BDS16F065PM1



DX251PYS39E150PM1



DX251DYS29E150PM1



DX252PSS39E150HM1




DX251CYS39E150PM1




DX401PSS-B03B150FH2



DX401PSS-A03B150PM1



PS302PSS23B088PME



DX402CSS36DPM1



DX401PSS-B03B150PM1



DX351PSS53D150PM1



KQ852PSS36D200PM1



定制刹车脚轮1



PS451PSS36D200PM1



定制刹车脚轮2



DX101PH53G050HM1



DX101DBS53G050HM1



DX101LH53G050HM1



DX101LSS53G050HM1



DX101GD53G050HM1



DX101PH03G050HM1



DX101DBS03G050HM1



DX101LH03G050HM1



DX101LSS03G050HM1




DX101GD03G050HM1

规格 size	平底活动 swivel	平底刹车 brake	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake
1"	DX101PH53G025HM1	DX101BDS53G025HM1	DX101LH53G025HM1	DX101LSS53G025HM1
	DG101PH03G025PM1	DG101BDS03G025PM1	DG101LH03G025PM1	DG101LSS03G025PM1
	DX101PH16G025HM1	DX101BDS16G025HM1	DX101LH16G025HM1	DX101LSS16G025HM1
1.2"	DX101PH53G030HM1	DX101BDS53G030HM1	DX101LH53G030HM1	DX101LSS53G030HM1
	DG101PH03G030PM1	DG101BDS03G030PM1	DG101LH03G030PM1	DG101LSS03G030PM1
	DX101PH16G030HM1	DX101BDS16G030HM1	DX101LH16G030HM1	DX101LSS16G030HM1
1.5"	DX101PH53G040HM1	DX101BDS53G040HM1	DX101LH53G040HM1	DX101LSS53G040HM1
	DG101PH03G040PM1	DG101BDS03G040PM1	DG101LH03G040PM1	DG101LSS03G040PM1
	DX101PH16G040HM1	DX101BDS16G040HM1	DX101LH16G040HM1	DX101LSS16G040HM1
2"	DX101PH53G050HM1	DX101BDS53G050HM1	DX101LH53G050HM1	DX101LSS53G050HM1
	DG101PH03G050PM1	DG101BDS03G050PM1	DG101LH03G050PM1	DG101LSS03G050PM1
	DX101PH16G050HM1	DX101BDS16G050HM1	DX101LH16G050HM1	DX101LSS16G050HM1
2.5"	DX101PH53G065HM1	DX101BDS53G065HM1	DX101LH53G065HM1	DX101LSS53G065HM1
	DG101PH03G065PM1	DG101BDS03G065PM1	DG101LH03G065PM1	DG101LSS03G065PM1
	DX101PH16G065HM1	DX101BDS16G065HM1	DX101LH16G065HM1	DX101LSS16G065HM1
3"	DX101PH53G075HM1	DX101BDS53G075HM1	DX101LH53G075HM1	DX101LSS53G075HM1
	DG101PH03G075PM1	DG101BDS03G075PM1	DG101LH03G075PM1	DG101LSS03G075PM1
	DX101PH16G075HM1	DX101BDS16G075HM1	DX101LH16G075HM1	DX101LSS16G075HM1

安装尺寸图 Fitting Dimension

规格	底板尺寸 A x B	孔距 a x b	孔径 φD
1"	38x33	30x24	4.2
1.25"	38x33	30x24	4.2
1.5"	46x39	36x28	5.2
2"	59x47	46x35	6.2
2.5"	70x58	55x42	8.2
3"	70x58	55x42	8.2


1"-3" 活动底板尺寸
1"-3" Swivel baseplate

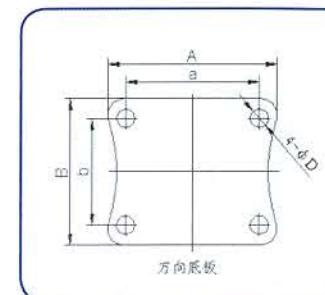

1"-3" 活动底板图
1"-3" Swivel baseplate

规格	底板尺寸 X x Y	孔距 X' x Y'	孔径 φD
1"	36x28	29x13	4.2
1.25"	36x28	29x13	4.2
1.5"	46x25	36x15	5.2
2"	58x40	45x25	6.2
2.5"	70x47	55x28	8.2
3"	70x47	55x28	8.2

1"-3" 固定底板尺寸
1"-3" Rigid baseplate

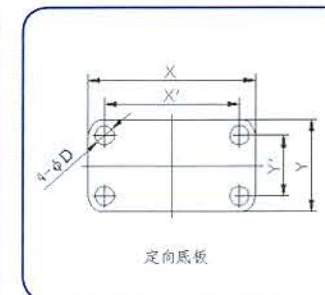

1"-3" 固定底板图
1"-3" Rigid baseplate


固 rigid	单轮材料 material	轮 width	载 load	转动半径 offset	平底全高 height
DX101GD53G025HM1	聚丙烯 PP	13	10	25	35
DG101GD03G025PM1	聚氨酯 PU	13	10	25	35
DX101GD16G025HM1	尼龙 Nylon	13	10	25	35
DX101GD53G030HM1	聚丙烯 PP	13	16	30	43
DG101GD03G030PM1	聚氨酯 PU	13	16	30	43
DX101GD16G030HM1	尼龙 Nylon	13	16	30	43
DX101GD53G040HM1	聚丙烯 PP	17	20	36	50
DG101GD03G040PM1	聚氨酯 PU	17	20	36	50
DX101GD16G040HM1	尼龙 Nylon	17	20	36	50
DX101GD53G050HM1	聚丙烯 PP	22	30	48	65
DG101GD03G050PM1	聚氨酯 PU	22	30	48	65
DX101GD16G050HM1	尼龙 Nylon	22	30	48	65
DX101GD53G065HM1	聚丙烯 PP	27	40	61	82
DG101GD03G065PM1	聚氨酯 PU	27	40	61	82
DX101GD16G065HM1	尼龙 Nylon	27	40	61	82
DX101GD53G075HM1	聚丙烯 PP	27	50	66	93
DG101GD03G075PM1	聚氨酯 PU	27	50	66	93
DX101GD16G075HM1	尼龙 Nylon	27	50	66	93

单轮 Wheel

支架轮 Caster



聚氨酯
Polyurethane



尼龙
Nylon



DX151PH03B050PM1



DX151PSS03B050PM1




DX151GD03B050PM1




DX151LH09D050PM1

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake	单轮材料 material
1.5"	DX151PH03B040PM1	DX151PSS03B040PM1	DX151GD03B040PM1	DX151LH03B040PM1	DX151LSS03B040PM1	塑芯聚氨酯 PP
	DX151PH13B040PM1	DX151PSS13B040PM1	DX151GD13B040PM1	DX151LH13B040PM1	DX151LSS13B040PM1	塑芯尼龙 Nylon
	DX151PH53B040PM1	DX151PSS53B040PM1	DX151GD53B040PM1	DX151LH53B040PM1	DX151LSS53B040PM1	尼龙 PA
2"	DX151PH03B050PM1	DX151PSS03B050PM1	DX151GD03B050PM1	DX151LH03B050PM1	DX151LSS03B050PM1	塑芯聚氨酯 PP
	DX151PH13B050PM1	DX151PSS13B050PM1	DX151GD13B050PM1	DX151LH13B050PM1	DX151LSS13B050PM1	塑芯尼龙 Nylon
	DX151PH53B050PM1	DX151PSS53B050PM1	DX151GD53B050PM1	DX151LH53B050PM1	DX151LSS53B050PM1	尼龙 PA
2.5"	DX151PH03B060PM1	DX151PSS03B060PM1	DX151GD03B060PM1	DX151LH03B060PM1	DX151LSS03B060PM1	塑芯聚氨酯 PP
	DX151PH13B060PM1	DX151PSS13B060PM1	DX151GD13B060PM1	DX151LH13B060PM1	DX151LSS13B060PM1	塑芯尼龙 Nylon
	DX151PH53B060PM1	DX151PSS53B060PM1	DX151GD53B060PM1	DX151LH53B060PM1	DX151LSS53B060PM1	尼龙 PA
3"	DX151PH03C075PM1	DX151PSS03C075PM1	DX151GD03C075PM1	DX151LH03C075PM1	DX151LSS03C075PM1	塑芯聚氨酯 PU
	DX151PH13C075PM1	DX151PSS13C075PM1	DX151GD13C075PM1	DX151LH13C075PM1	DX151LSS13C075PM1	塑芯尼龙 Nylon
	DX151PH53B075PM1	DX151PSS53B075PM1	DX151GD53B075PM1	DX151LH53B075PM1	DX151LSS53B075PM1	尼龙 PA
3.5"	DX151PH03C088PM1	DX151PSS03C088PM1	DX151GD03C088PM1	DX151LH03C088PM1	DX151LSS03C088PM1	塑芯聚氨酯 PU
	DX151PH13C088PM1	DX151PSS13C088PM1	DX151GD13C088PM1	DX151LH13C088PM1	DX151LSS13C088PM1	塑芯尼龙 Nylon
	DX151PH53B088PM1	DX151PSS53B088PM1	DX151GD53B088PM1	DX151LH53B088PM1	DX151LSS53B088PM1	尼龙 PA
4"	DX151PH03C100PM1	DX151PSS03C100PM1	DX151GD03C100PM1	DX151LH03C100PM1	DX151LSS03C100PM1	塑芯聚氨酯 PU
	DX151PH13C100PM1	DX151PSS13C100PM1	DX151GD13C100PM1	DX151LH13C100PM1	DX151LSS13C100PM1	塑芯尼龙 Nylon
	DX151PH53B100PM1	DX151PSS53B100PM1	DX151GD53B100PM1	DX151LH53B100PM1	DX151LSS53B100PM1	尼龙 PA
5"	DX151PH03C125PM1	DX151PSS03C125PM1	DX151GD03C125PM1	DX151LH03C125PM1	DX151LSS03C125PM1	塑芯聚氨酯 PU
	DX151PH13C125PM1	DX151PSS13C125PM1	DX151GD13C125PM1	DX151LH13C125PM1	DX151LSS13C125PM1	塑芯尼龙 Nylon
	DX151PH53B125PM1	DX151PSS53B125PM1	DX151GD53B125PM1	DX151LH53B125PM1	DX151LSS53B125PM1	尼龙 PA
6"	DX151PH03C150PM1	DX151PSS03C150PM1	DX151GD03C150PM1	DX151LH03C150PM1	DX151LSS03C150PM1	塑芯聚氨酯 PU
	DX151PH13C150PM1	DX151PSS13C150PM1	DX151GD13C150PM1	DX151LH13C150PM1	DX151LSS13C150PM1	塑芯尼龙 Nylon
	DX151PH53B150PM1	DX151PSS53B150PM1	DX151GD53B150PM1	DX151LH53B150PM1	DX151LSS53B150PM1	尼龙 PA
8"	DX151PH03C200PM1	DX151PSS03C200PM1	DX151GD03C200PM1	DX151LH03C200PM1	DX151LSS03C200PM1	塑芯聚氨酯 PU
	DX151PH13C200PM1	DX151PSS13C200PM1	DX151GD13C200PM1	DX151LH13C200PM1	DX151LSS13C200PM1	塑芯尼龙 Nylon
	DX151PH53B200PM1	DX151PSS53B200PM1	DX151GD53B200PM1	DX151LH53B200PM1	DX151LSS53B200PM1	尼龙 PA


安装尺寸图 Fitting Dimension

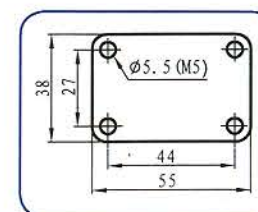


1.5寸底板
1.5" Baseplate

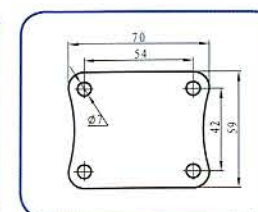


2-2.5寸活动底板
2-2.5" Swivel baseplate

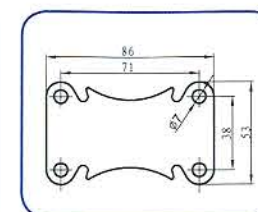

2-2.5寸固定底板
2-2.5" Rigid baseplate

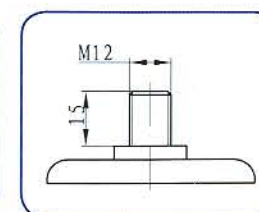

2寸丝扣
2" threaded stem

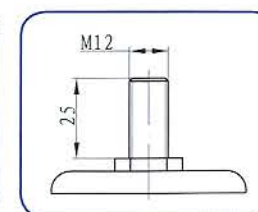

2-2.5寸丝扣
2-2.5" threaded stem

轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height	螺丝全高 height
20	连体轴承	25	20	53	
20	连体轴承	25	20	53	
20	连体轴承	28	20	53	
25	连体轴承	35	26	72	77
25	连体轴承	40	26	72	77
25	连体轴承	42	26	72	77
20	双轴承	35	20		72
25	连体轴承	40	28	85	90
25	连体轴承	45	28	85	90
25	连体轴承	53	28	85	90
32	单轴承	90	36	103	
32	单轴承	95	36	103	
32	连体轴承	100	36	103	
32	单轴承	110	41	108	
32	单轴承	115	41	108	
32	连体轴承	120	41	108	
32	单轴承	140	41	128	
32	单轴承	145	41	128	
32	连体轴承	150	41	128	
32	单轴承	150	41	155	
32	单轴承	155	41	155	
32	连体轴承	160	41	155	
45	单轴承	180	55	200	
45	单轴承	185	55	200	
45	连体轴承	190	55	200	
50	单轴承	190	55	240	
50	单轴承	200	55	240	
50	连体轴承	250	55	240	



DX201PH03B100PM1



DX201PSS-A09B100PM1



DX201PSS-B13B100PM1



DX201PSS-C03B100PM1



DX201GD03B100PM1



DX201PH49B075PM1



DX201DH03B100PM1



DX201LH06B100HM1

规格 size	平底活动 swivel	平底前双刹A brake A	固定 rigid	螺丝活动 threaded stem brake A	螺丝刹车 threaded stem brake A	插杆活动 stem swivel	插杆刹车 stem brake
3"	DX201PH03B075PM1	DX201PSS-A/-B/-C03B075PM1	DX201GD03B075PM1	DX201LH03B075PM1	DX201LSS-A/-B/-C03B075PM1	DX201CH03B075PM1	DX201CSS-A/-B/-C03B075PM1
	DX201PH13B075HM1	DX201PSS-A/-B/-C13B075HM1	DX201GD13B075HM1	DX201LH13B075HM1	DX201LSS-A/-B/-C13B075HM1	DX201CH13B075HM1	DX201CSS-A/-B/-C13B075HM1
	DX201PH06B075HM1	DX201PSS-A/-B/-C06B075HM1	DX201GD06B075HM1	DX201LH06B075HM1	DX201LSS-A/-B/-C06B075HM1	DX201CH06B075HM1	DX201CSS-A/-B/-C06B075HM1
	DX201PH09B075HM1	DX201PSS-A/-B/-C09B075HM1	DX201GD09B075HM1	DX201LH09B075HM1	DX201LSS-A/-B/-C09B075HM1	DX201CH09B075HM1	DX201CSS-A/-B/-C09B075HM1
	DX201PH49A075PM1	DX201PSS-A49A075PM1	DX201GD49A075PM1	DX201LH49A075PM1	DX201LSS-A49A075PM1	DX201CH49A075PM1	DX201CSS-A49A075PM1
3.5"	DX201PH03B088PM1	DX201PSS-A/-B/-C03B088PM1	DX201GD03B088PM1	DX201LH03B088PM1	DX201LSS-A/-B/-C03B088PM1	DX201CH03B088PM1	DX201CSS-A/-B/-C03B088PM1
	DX201PH13B088HM1	DX201PSS-A/-B/-C13B088HM1	DX201GD13B088HM1	DX201LH13B088HM1	DX201LSS-A/-B/-C13B088HM1	DX201CH13B088HM1	DX201CSS-A/-B/-C13B088HM1
	DX201PH06B088HM1	DX201PSS-A/-B/-C06B088HM1	DX201GD06B088HM1	DX201LH06B088HM1	DX201LSS-A/-B/-C06B088HM1	DX201CH06B088HM1	DX201CSS-A/-B/-C06B088HM1
	DX201PH09B088HM1	DX201PSS-A/-B/-C09B088HM1	DX201GD09B088HM1	DX201LH09B088HM1	DX201LSS-A/-B/-C09B088HM1	DX201CH09B088HM1	DX201CSS-A/-B/-C09B088HM1
	DX201PH49A088PM1	DX201PSS-A49A088PM1	DX201GD49A088PM1	DX201LH49A088PM1	DX201LSS-A49A088PM1	DX201CH49A088PM1	DX201CSS-A49A088PM1
4"	DX201PH03B100PM1	DX201PSS-A/-B/-C03B100PM1	DX201GD03B100PM1	DX201LH03B100PM1	DX201LSS-A/-B/-C03B100PM1	DX201CH03B100PM1	DX201CSS-A/-B/-C03B100PM1
	DX201PH13B100HM1	DX201PSS-A/-B/-C13B100HM1	DX201GD13B100HM1	DX201LH13B100HM1	DX201LSS-A/-B/-C13B100HM1	DX201CH13B100HM1	DX201CSS-A/-B/-C13B100HM1
	DX201PH06B100HM1	DX201PSS-A/-B/-C06B100HM1	DX201GD06B100HM1	DX201LH06B100HM1	DX201LSS-A/-B/-C06B100HM1	DX201CH06B100HM1	DX201CSS-A/-B/-C06B100HM1
	DX201PH09B100HM1	DX201PSS-A/-B/-C09B100HM1	DX201GD09B100HM1	DX201LH09B100HM1	DX201LSS-A/-B/-C09B100HM1	DX201CH09B100HM1	DX201CSS-A/-B/-C09B100HM1
	DX201PH49A100PM1	DX201PSS-A49A100PM1	DX201GD49A100PM1	DX201LH49A100PM1	DX201LSS-A49A100PM1	DX201CH49A100PM1	DX201CSS-A49A100PM1
5"	DX201PH03B125PM1	DX201PSS-A/-B/-C03B125PM1	DX201GD03B125PM1	DX201LH03B125PM1	DX201LSS-A/-B/-C03B125PM1	DX201CH03B125PM1	DX201CSS-A/-B/-C03B125PM1
	DX201PH13B125HM1	DX201PSS-A/-B/-C13B125HM1	DX201GD13B125HM1	DX201LH13B125HM1	DX201LSS-A/-B/-C13B125HM1	DX201CH13B125HM1	DX201CSS-A/-B/-C13B125HM1
	DX201PH06B125HM1	DX201PSS-A/-B/-C06B125HM1	DX201GD06B125HM1	DX201LH06B125HM1	DX201LSS-A/-B/-C06B125HM1	DX201CH06B125HM1	DX201CSS-A/-B/-C06B125HM1
	DX201PH09B125HM1	DX201PSS-A/-B/-C09B125HM1	DX201GD09B125HM1	DX201LH09B125HM1	DX201LSS-A/-B/-C09B125HM1	DX201CH09B125HM1	DX201CSS-A/-B/-C09B125HM1
	DX201PH49A125PM1	DX201PSS-A49A125PM1	DX201GD49A125PM1	DX201LH49A125PM1	DX201LSS-A49A125PM1	DX201CH49A125PM1	DX201CSS-A49A125PM1

单轮 Wheel




超级聚氨酯
Super Polyurethane



超级尼龙
Super Nylon



橡塑(蓝)
Polythene (blue)




橡塑(灰)
Polythene (grey)




超级人造胶
Artificial Rubber


安装尺寸图 Fitting Dimension




活动底板
Swivel baseplate




固定底板
Rigid baseplate



丝扣
threaded stem



插杆
stem



顶孔
Bolt hole

顶孔活动 bolt hole swivel	顶孔刹车 bolt hole brake	单轮材料 material	轴承 bearing	轮宽 width	载重 load	偏心距 offset	平底全高 height	螺丝全高 height	插杆全高 height	顶孔全高 height
DX201DH03B075PM1	DX201DSS-A/-B/-C03B075PM1	超级聚氨酯	PU	一体轴承	30	120	36	108/111	111	108/111
DX201DH13B075HM1	DX201DSS-A/-B/-C13B075HM1	超级尼龙	PA	一体轴承	30	128	36	108/111	111	108/111
DX201DH06B075HM1	DX201DSS-A/-B/-C06B075HM1	塑芯橡塑	TPP	一体轴承	30	120	36	108/111	111	108/111
DX201DH09B075HM1	DX201DSS-A/-B/-C09B075HM1	塑芯人造胶	TPR	一体轴承	30	100	36	108/111	111	108/111
DX201DH49A075PM1	DX201DSS-A49A075PM1	铸铁	Iron	轴承	30	120	36	108/111	111	108/111
DX201DH03B088PM1	DX201DSS-A/-B/-C03B088PM1	超级聚氨酯	PU	一体轴承	32	125	38	120/123	123	120/123
DX201DH13B088HM1	DX201DSS-A/-B/-C13B088HM1	超级尼龙	PA	一体轴承	32	130	38	120/123	123	120/123
DX201DH06B088HM1	DX201DSS-A/-B/-C06B088HM1	塑芯橡塑	TPP	一体轴承	32	125	38	120/123	123	120/123
DX201DH09B088HM1	DX201DSS-A/-B/-C09B088HM1	塑芯人造胶	TPR	一体轴承	32	110	38	120/123	123	120/123
DX201DH49A088PM1	DX201DSS-A49A088PM1	铸铁	Iron	轴承	30	130	38	120/123	123	120/123
DX201DH03B100PM1	DX201DSS-A/-B/-C03B100PM1	超级聚氨酯	PU	一体轴承	32	130	40	135/138	138	135/138
DX201DH13B100HM1	DX201DSS-A/-B/-C13B100HM1	超级尼龙	PA	一体轴承	32	135	40	135/138	138	135/138
DX201DH06B100HM1	DX201DSS-A/-B/-C06B100HM1	塑芯橡塑	TPP	一体轴承	32	128	40	135/138	138	135/138
DX201DH09B100HM1	DX201DSS-A/-B/-C09B100HM1	塑芯人造胶	TPR	一体轴承	32	120	40	135/138	138	135/138
DX201DH49A100PM1	DX201DSS-A49A100PM1	铸铁	Iron	轴承	32	135	40	135/138	138	135/138
DX201DH03B125PM1	DX201DSS-A/-B/-C03B125PM1	超级聚氨酯	PU	一体轴承	32	130	42	160/163	163	160/163
DX201DH13B125HM1	DX201DSS-A/-B/-C13B125HM1	超级尼龙	PA	一体轴承	32	140	42	160/163	163	160/163
DX201DH06B125HM1	DX201DSS-A/-B/-C06B125HM1	塑芯橡塑	TPP	一体轴承	32	130	42	160/163	163	160/163
DX201DH09B125HM1	DX201DSS-A/-B/-C09B125HM1	塑芯人造胶	TPR	一体轴承	32	125	42	160/163	163	160/163
DX201DH49A125PM1	DX201DSS-A49A125PM1	铸铁	Iron	轴承	32	180	42	160/163	163	160/163



DX202PH53D100HM1



DX202PSS-A53D100HM1




DX202PSS-B53D100HM1



DX202DH53D100HM1



DX202GD53D100HM1



DX202CH53D100HM1



DX202LH53D100HM1


规格 size	平底活动 swivel	平底双刹A/B brake A/B	固定 rigid	螺丝活动 threaded stem	螺丝刹车A/B threaded stem brake A/B	插杆活动 stem swivel	插杆刹车A/B stem brake A/B
3"	DX202PH53D075HM1	DX22PSS-A/-B53D075HM1	DX202GD53D075HM1	DX202LH53D075HM1	DX22LSS-A/-B53D075HM1	DX202CH53D075HM1	DX202CSS-A/-B53D075HM1
3.5"	DX202PH53D088HM1	DX22PSS-A/-B53D088HM1	DX202GD53D088HM1	DX202LH53D088HM1	DX22LSS-A/-B53D088HM1	DX202CH53D088HM1	DX202CSS-A/-B53D088HM1
4"	DX202PH53D100HM1	DX22PSS-A/-B53D100HM1	DX202GD53D100HM1	DX202LH53D100HM1	DX22LSS-A/-B53D100HM1	DX202CH53D100HM1	DX202CSS-A/-B53D100HM1
5"	DX202PH53D125HM1	DX22PSS-A/-B53D125HM1	DX202GD53D125HM1	DX202LH53D125HM1	DX22LSS-A/-B53D125HM1	DX202CH53D125HM1	DX202CSS-A/-B53D125HM1

单轮 Wheel




高强度尼龙
High-strength Nylon


安装尺寸图 Fitting Dimension

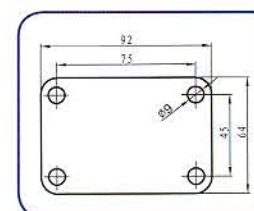


活动底板
Swivel baseplate

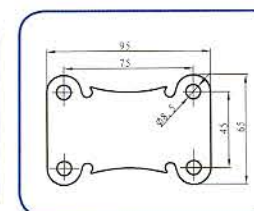


固定底板
Rigid baseplate



丝扣
threaded stem

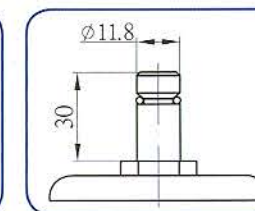

插杆
stem

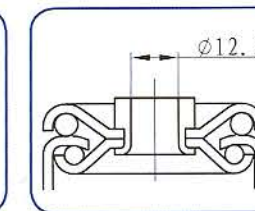

顶孔
Bolt hole

顶孔活动 bolt hole swivel	顶孔刹车A/B bolt hole brake A/B	载重 load	轮宽 width	轴承 bearing	单轮材料 material	偏心距 offset	平底全高 height	螺丝全高 height	插杆全高 height	顶孔全高 height
DX202DH53D075HM1	DX202DSS-A/-B53D075HM1	105	30	滚珠 ball	高强度尼龙 High-strength Nylon	36	108	111	108	104
DX202DH53D088HM1	DX202DSS-A/-B53D088HM1	115	32	滚珠 ball		38	120	123	120	115
DX202DH53D100HM1	DX202DSS-A/-B53D100HM1	135	32	滚珠 ball		40	135	138	135	130
DX202DH53D125HM1	DX202DSS-A/-B53D125HM1	145	32	滚珠 ball		42	160	163	160	155



DX203PH56A100PM1



DX203PSS-B56A100PM1



DX203PH49A100PM1

详细使用标准:

- 1、高温范围: 100-150°C (250°C 以上需定制)
- 2、在高温环境下荷重运行 ≤ 14M
- 3、高温状态下荷重运行时间 ≤ 7S
- 4、温度作用状态: 干燥, 如果有湿度, 建议用铸铁轮
- 5、高温状态下, 出现转动不灵活属于正常现象, 略冷却即可正常使用

规格 size	平底活动 swivel	平底双刹B Brake B	固定 rigid	插杆活动 stem swivel	插杆刹车B stem brake B
3"	DX203PH56A075PM1	DX203PSS-B56A075PM1	DX203GD56A075PM1	DX203CH56A075PM1	DX203CSS-B56A075PM1
	DX203PH49A075PM1	DX203PSS-B49A075PM1	DX203GD49A075PM1	DX203CH49A075PM1	DX203CSS-B49A075PM1
4"	DX203PH56A100PM1	DX203PSS-B56A100PM1	DX203GD56A100PM1	DX203CH56A100PM1	DX203CSS-B56A100PM1
	DX203PH49A100PM1	DX203PSS-B49A100PM1	DX203GD49A100PM1	DX203CH49A100PM1	DX203CSS-B49A100PM1
5"	DX203PH56A125PM1	DX203PSS-B56A125PM1	DX203GD56A125PM1	DX203CH56A125PM1	DX203CSS-B56A125PM1
	DX203PH49A125PM1	DX203PSS-B49A125PM1	DX203GD49A125PM1	DX203CH49A125PM1	DX203CSS-B49A125PM1

单轮 Wheel




酚醛树脂
Phenolic




铸铁
Iron


安装尺寸图 Fitting Dimension

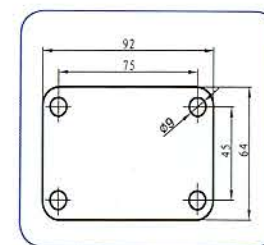


活动底板
Swivel baseplate

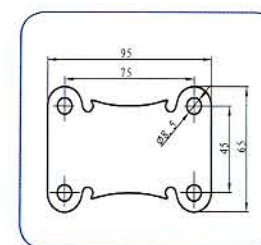


固定底板
Rigid baseplate

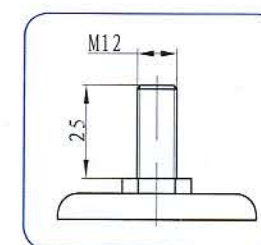

丝扣
threaded stem

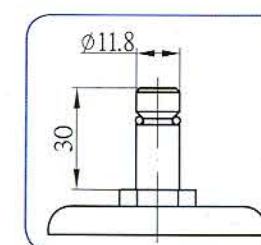


插杆
stem

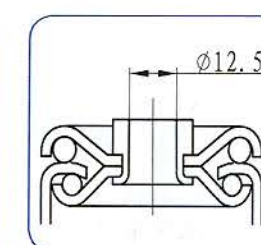

顶孔
Bolt hole

单轮材料 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height	插杆全高 height
酚醛 phenolic	35	轴套 bearing	60	38	110	110
铸铁 iron	35	淬火轴套 bearing	90	38	110	110
酚醛 phenolic	35	轴套 bearing	125	40	134	134
铸铁 iron	35	淬火轴套 bearing	155	40	134	134
酚醛 phenolic	35	轴套 bearing	130	42	159	159
铸铁 iron	35	淬火轴套 bearing	160	42	159	159



DX251CH39E150PM1



DX251LH39E150PM1



DX251CH39E150PM1(φ8)



DX251PH39E150PM1



DX251PYS39E150PM1



DX251GD39E150PM1




DX251DYS39E150PM1

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	固定刹车 rigid brake	螺丝活动 M12 x 25 threaded stem swivel	螺丝刹车 M12 x 25 threaded stem brake	插杆活动 φ22 x 25 stem swivel
3"	DX21PH39E075HM1	DX251PYS39E075HM1	DX251GD39E075HM1	DX251DYS39E075HM1	DX251LH39E075HM1	DX251LYS39E075HM1	DX251CH39E075HM1
	DX21PH29E075PM1	DX251PYS29E075PM1	DX251GD29E075PM1	DX251DYS29E075PM1	DX251LH29E075PM1	DX251LYS29E075PM1	DX251CH29E075PM1
	DX21PH19E075PM1	DX251PYS19E075PM1	DX251GD19E075PM1	DX251DYS19E075PM1	DX251LH19E075PM1	DX251LYS19E075PM1	DX251CH19E075PM1
4"	DX21PH39E100HM1	DX251PYS39E100HM1	DX251GD39E100HM1	DX251DYS39E100HM1	DX251LH39E100HM1	DX251LYS39E100HM1	DX251CH39E100HM1
	DX21PH29E100PM1	DX251PYS29E100PM1	DX251GD29E100PM1	DX251DYS29E100PM1	DX251LH29E100PM1	DX251LYS29E100PM1	DX251CH29E100PM1
	DX21PH19E100PM1	DX251PYS19E100PM1	DX251GD19E100PM1	DX251DYS19E100PM1	DX251LH19E100PM1	DX251LYS19E100PM1	DX251CH19E100PM1
5"	DX21PH39E125HM1	DX251PYS39E125HM1	DX251GD39E125HM1	DX251DYS39E125HM1	DX251LH39E125HM1	DX251LYS39E125HM1	DX251CH39E125HM1
	DX21PH29E125PM1	DX251PYS29E125PM1	DX251GD29E125PM1	DX251DYS29E125PM1	DX251LH29E125PM1	DX251LYS29E125PM1	DX251CH29E125PM1
	DX21PH19E125PM1	DX251PYS19E125PM1	DX251GD19E125PM1	DX251DYS19E125PM1	DX251LH19E125PM1	DX251LYS19E125PM1	DX251CH19E125PM1
6"	DX251PH39E150HM1	DX251PYS39E150HM1	DX251GD39E150HM1	DX251DYS39E150HM1	DX251LH39E150HM1	DX251LYS39E150HM1	DX251CH39E150HM1
	DX251PH29E150PM1	DX251PYS29E150PM1	DX251GD29E150PM1	DX251DYS29E150PM1	DX251LH29E150PM1	DX251LYS29E150PM1	DX251CH29E150PM1
	DX251PH19E150PM1	DX251PYS19E150PM1	DX251GD19E150PM1	DX251DYS19E150PM1	DX251LH19E150PM1	DX251LYS19E150PM1	DX251CH19E150PM1
8"	DX251PH39E200HM1	DX251PYS39E200HM1	DX251GD39E200HM1	DX251DYS39E200HM1	DX251LH39E200HM1	DX251LYS39E200HM1	DX251CH39E200HM1
	DX251PH29E200PM1	DX251PYS29E200PM1	DX251GD29E200PM1	DX251DYS29E200PM1	DX251LH29E200PM1	DX251LYS29E200PM1	DX251CH29E200PM1
	DX251PH19E200PM1	DX251PYS19E200PM1	DX251GD19E200PM1	DX251DYS19E200PM1	DX251LH19E200PM1	DX251LYS19E200PM1	DX251CH19E200PM1

单轮 Wheel



钢芯橡胶
steel-core Rubber




钢芯聚氨酯
steel-core PU




钢芯尼龙
Steel-core Nylon

安装尺寸图 Fitting Dimension



活动底板
swivel baseplate



固定底板
rigid baseplate

规格 size	(mm) 固定底板 rigid baseplate	(mm) 孔距 distance A x B	(mm) 孔距 distance A' x B'	(mm) 活动底板 swivel baseplate	(mm) 孔距 distance X x Y	(mm) 孔距 distance X' x Y'	(mm) 孔径 diameter
3"	95 x 72	63 x 40	63 x 40	82 x 82	63 x 63	63 x 63	9.5
4"	120 x 82	80 x 45	90 x 50	97 x 97	67 x 67	74 x 74	11
5"	138 x 90	100 x 56	112 x 53	110 x 110	75 x 75	90 x 90	
6"	138 x 90	100 x 56	112 x 53	120 x 120	75 x 75	90 x 90	
8"	152 x 103	112 x 63	119 x 56	140 x 140	100 x 100	115 x 115	12

插杆刹车 φ22 x 25 stem brake	插杆固定 stem rigid	单轮材料 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height	螺丝全高 height	插杆全高 height
DX251CYS39E075HM1	DX251CG39E075HM1	钢芯橡胶 steel-core Rubber	32	滚珠 ball	100	30	100		
DX251CYS29E075PM1	DX251CG29E075PM1	钢芯聚氨酯 steel-core PU	32		130	30	100		
DX251CYS19E075PM1	DX251CG19E075PM1	钢芯尼龙 steel-core Nylon	32		150	30	100		
DX251CYS39E100HM1	DX251CG39E100HM1	钢芯橡胶 steel-core Rubber	38		180	35	144	144	144
DX251CYS29E100PM1	DX251CG29E100PM1	钢芯聚氨酯 steel-core PU	32		230	35	144	144	144
DX251CYS19E100PM1	DX251CG19E100PM1	钢芯尼龙 steel-core Nylon	32		280	35	144	144	144
DX251CYS39E125HM1	DX251CG39E125HM1	钢芯橡胶 steel-core Rubber	40		230	38	172	172	172
DX251CYS29E125PM1	DX251CG29E125PM1	钢芯聚氨酯 steel-core PU	35		280	38	172	172	172
DX251CYS19E125PM1	DX251CG19E125PM1	钢芯尼龙 steel-core Nylon	35		350	38	172	172	172
DX251CYS39E150HM1	DX251CG39E150HM1	钢芯橡胶 steel-core Rubber	43		320	40	197	197	197
DX251CYS29E150PM1	DX251CG29E150PM1	钢芯聚氨酯 steel-core PU	38		380	40	197	197	197
DX251CYS19E150PM1	DX251CG19E150PM1	钢芯尼龙 steel-core Nylon	38		450	40	197	197	197
DX251CYS39E200HM1	DX251CG39E200HM1	钢芯橡胶 steel-core Rubber	45		400	58	250		
DX251CYS29E200PM1	DX251CG29E200PM1	钢芯聚氨酯 steel-core PU	42		450	58	250		
DX251CYS19E200PM1	DX251CG19E200PM1	钢芯尼龙 steel-core Nylon	42		550	58	250		



DX252PH39E150HM1



DX252BDS39E150HM1



DX252GD39E150HM1

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	单轮材质 material
3"	DX252PH39E075HM1	DX252BDS39E075HM1	DX202GD39E075HM1	钢芯橡胶 Steel-core Rubber
	DX252PH03E075HM1	DX252BDS03E075HM1	DX202GD03E075HM1	塑芯聚氨酯 PU
4"	DX252PH39E100HM1	DX252BDS39E100HM1	DX202GD39E100HM1	钢芯橡胶 Steel-core Rubber
	DX252PH03E100HM1	DX252BDS03E100HM1	DX202GD03E100HM1	塑芯聚氨酯 PU
5"	DX252PH39E125HM1	DX252BDS39E125HM1	DX202GD39E125HM1	钢芯橡胶 Steel-core Rubber
	DX252PH03E125HM1	DX252BDS03E125HM1	DX202GD03E125HM1	塑芯聚氨酯 PU
6"	DX252PH39E150HM1	DX252BDS39E150HM1	DX202GD39E150HM1	钢芯橡胶 Steel-core Rubber
	DX252PH03E150HM1	DX252BDS03E150HM1	DX202GD03E150HM1	塑芯聚氨酯 PU
8"	DX252PH39E200HM1	DX252BDS39E200HM1	DX202GD39E200HM1	钢芯橡胶 Steel-core Rubber
	DX252PH03E200HM1	DX252BDS03E200HM1	DX202GD03E200HM1	塑芯聚氨酯 PU

单轮 Wheel




钢芯橡胶
Steel-core Rubber




塑芯聚氨酯
PU

安装尺寸图 Fitting Dimension

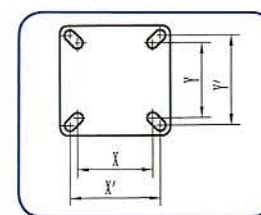

活动底板
swivel baseplate

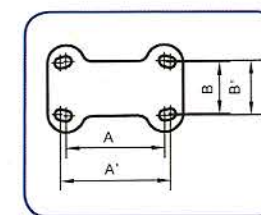

固定底板
rigid baseplate


规格 size	(mm) 固定底板 rigid baseplate	(mm) 孔距 distance		(mm) 活动底板 swivel baseplate	(mm) 孔距 distance		(mm) 孔径 diameter
		A x B	A' x B'		X x Y	X' x Y'	
4"	120 x 82	80 X 45	90 X 50	97 x 97	67 X 67	74 X 74	11
5"	120 x 82	80 X 45	90 X 50	97 x 97	67 X 67	74 X 74	
6"	138 x 90	100 X 56	112 X 53	120 x 120	75 X 75	90 X 90	
8"	138 x 90	100 X 56	112 X 53	120 x 120	75 X 75	90 X 90	

轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
32	滚珠 ball	200	30	100
32		70	30	100
38		160	35	144
38		150	35	144
38		270	37	172
38		180	37	172
40		320	39	197
40		250	39	197
45		400	45	250
45		300	45	250




特点: 轮架电泳, 低重心设计结构
 规格: 平底活动、固定、刹车、螺丝
 材质: 高强度尼龙
 尺寸: 2.5" - 3"
 载重: 200 - 250KG
 品质承诺: 在正常使用情况下, 保用一年
 Features: the bracket is paint electroplated, low barycenter structure design
 Specifications: swivel, rigid, threaded stem
 Materials: Nylon
 Size: 2.5" - 3"
 Load : 200-250KG
 Quality commitment: in normal operating, 1 year warranty

安装尺寸图 Fitting Dimension

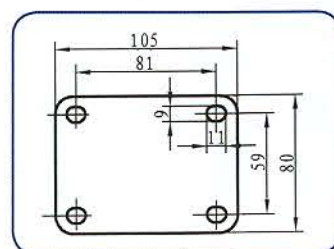


底板
baseplate

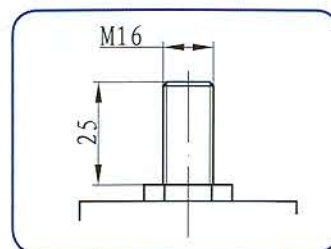

丝扣
Threaded stem

支架 Bracket

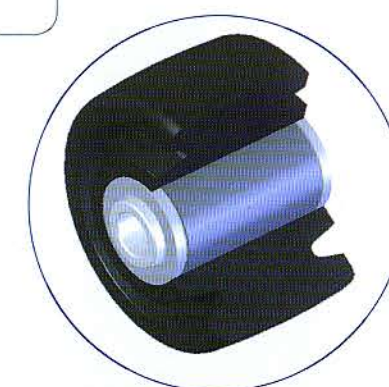

规格 size	平底活动 swivel	平底刹车 brake	螺丝刹车 threaded stem brake	固 定 rigid	单轮材料 material	轮 宽 width	轴 承 bearing	载 重 load	偏心距 offset	平底全高 height	螺丝全高 height
2.5"	DY301PH16F065PM1	DY301BDS16F065PM1	DY301LSS16F065PM1	DY301GD16F065PM1	超级尼龙 Super Nylon	46	滚针 needle	200	23	90	97
3"	DY301PH16F075PM1	DY301BDS16F075PM1	DY301LSS16F075PM1	DY301GD16F075PM1	超级尼龙 Super Nylon	46	滚针 needle	250	24	100	108

支架表面处理方式 Furnishing option





PS302PH23B088PM1




PS302GD23B088PM1



PS302PH33B088PM1



PS302GD33B088PM1



PS302PSS23B088PM1



PS302PH43B088PM1



PS302GD43B088PM1

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake
2"	PS302PH33B050PM1	PS302PSS33B050PM1	PS302GD33B050PM1	PS302LH33B050PM1	PS302LSS33B050PM1
	PS302PH43B050PM1	PS302PSS43B050PM1	PS302GD43B050PM1	PS302LH43B050PM1	PS302LSS43B050PM1
	PS302PH23B050PM1	PS302PSS23B050PM1	PS302GD23B050PM1	PS302LH23B050PM1	PS302LSS23B050PM1
2.5"	PS302PH33B065PM1	PS302PSS33B065PM1	PS302GD33B065PM1	PS302LH33B065PM1	PS302LSS33B065PM1
	PS302PH43B065PM1	PS302PSS43B065PM1	PS302GD43B065PM1	PS302LH43B065PM1	PS302LSS43B065PM1
	PS302PH23B065PM1	PS302PSS23B065PM1	PS302GD23B065PM1	PS302LH23B065PM1	PS302LSS23B065PM1
3"	PS302PH33B075PM1	PS302PSS33B075PM1	PS302GD33B075PM1	PS302LH33B075PM1	PS302LSS33B075PM1
	PS302PH43B075PM1	PS302PSS43B075PM1	PS302GD43B075PM1	PS302LH43B075PM1	PS302LSS43B075PM1
	PS302PH23B075PM1	PS302PSS23B075PM1	PS302GD23B075PM1	PS302LH23B075PM1	PS302LSS23B075PM1
3.5"	PS302PH33B088PM1	PS302PSS33B088PM1	PS302GD33B088PM1	PS302LH33B088PM1	PS302LSS33B088PM1
	PS302PH43B088PM1	PS302PSS43B088PM1	PS302GD43B088PM1	PS302LH43B088PM1	PS302LSS43B088PM1
	PS302PH23B088PM1	PS302PSS23B088PM1	PS302GD23B088PM1	PS302LH23B088PM1	PS302LSS23B088PM1
4"	PS302PH33B100PM1	PS302PSS33B100PM1	PS302GD33B100PM1	PS302LH33B100PM1	PS302LSS33B100PM1
	PS302PH43B100PM1	PS302PSS43B100PM1	PS302GD43B100PM1	PS302LH43B100PM1	PS302LSS43B100PM1
	PS302PH23B100PM1	PS302PSS23B100PM1	PS302GD23B100PM1	PS302LH23B100PM1	PS302LSS23B100PM1
5"	PS302PH33B125PM1	PS302PSS33B125PM1	PS302GD33B125PM1	PS302LH33B125PM1	PS302LSS33B125PM1
	PS302PH43B125PM1	PS302PSS43B125PM1	PS302GD43B125PM1	PS302LH43B125PM1	PS302LSS43B125PM1
	PS302PH23B125PM1	PS302PSS23B125PM1	PS302GD23B125PM1	PS302LH23B125PM1	PS302LSS23B125PM1

单轮 Wheel



铝芯尼龙
Aluminium-core Nylon




铝芯聚氨酯
Aluminium-core PU




铝芯橡胶
Aluminium-core Rubber


安装尺寸图 Fitting Dimension

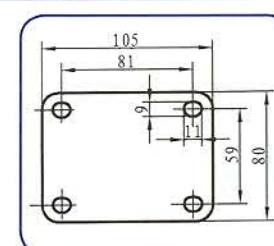


2-3 寸底板
2-3" baseplate

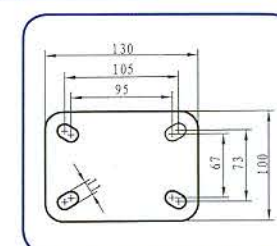

3.5-5 寸活动底板
3.5-5" Swivel baseplate

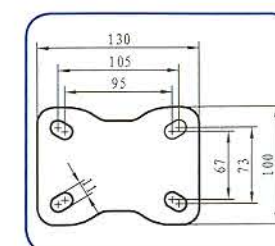


3.5-5 寸固定底板
3.5-5" Rigid baseplate

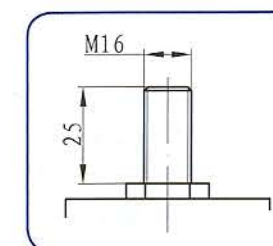

丝扣
Threaded stem


单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
铝芯聚氨酯 Aluminium-core pu	46	一体轴承 Annular bearing	150	23	100
铝芯橡胶 Aluminium-core Rubber	46		150	23	100
铝芯尼龙 Aluminium-core Nylon	46		250	23	100
铝芯聚氨酯 Aluminium-core pu	46		200	24	110
铝芯橡胶 Aluminium-core Rubber	46		200	24	110
铝芯尼龙 Aluminium-core Nylon	46		350	24	110
铝芯聚氨酯 Aluminium-core pu	48		250	37.5	135
铝芯橡胶 Aluminium-core Rubber	48		250	37.5	135
铝芯尼龙 Aluminium-core Nylon	48		350	37.5	135
铝芯聚氨酯 Aluminium-core pu	48		250	37.5	140
铝芯橡胶 Aluminium-core Rubber	48		250	37.5	140
铝芯尼龙 Aluminium-core Nylon	48		350	37.5	140
铝芯聚氨酯 Aluminium-core pu	48		300	40	147
铝芯橡胶 Aluminium-core Rubber	48		300	40	147
铝芯尼龙 Aluminium-core Nylon	48		450	40	147
铝芯聚氨酯 Aluminium-core pu	50		350	42	173
铝芯橡胶 Aluminium-core Rubber	50		350	42	173
铝芯尼龙 Aluminium-core Nylon	50		550	42	173



DX351PH53D150PM1



DX351PSS53D150PM1



DX351BDS53D150PM1



DX351GD53D150PM1

规格 size	平底活动 swivel	平底前双刹 brake	平底边刹 side brake	固定 rigid
4"	DX351PH53D100PM1	DX351PSS53D100PM1	DX351BDS53D100PM1	DX351GD53D100PM1
	DX351PH03B100PM1	DX351PSS03B100PM1	DX351BDS03B100PM1	DX252GD03B100HM1
	DX351PH36D100PM1	DX351PSS36D100PM1	DX351BDS36D100PM1	DX252GD36D100HM1
	DX351PH46D100HM1	DX351PSS46D100HM1	DX351BDS46D100HM1	DX252GD46D100HM1
	DX351PH49D100PM1	DX351PSS49D100PM1	DX351BDS49D100PM1	DX252GD49D100HM1
5"	DX351PH53D125PM1	DX351PSS53D125PM1	DX351BDS53D125PM1	DX252GD53D125HM1
	DX351PH03B125PM1	DX351PSS03B125PM1	DX351BDS03B125PM1	DX252GD03B125HM1
	DX351PH36D125PM1	DX351PSS36D125PM1	DX351BDS36D125PM1	DX252GD36D125HM1
	DX351PH46D125HM1	DX351PSS46D125HM1	DX351BDS46D125HM1	DX252GD46D125HM1
	DX351PH49D125PM1	DX351PSS49D125PM1	DX351BDS49D125PM1	DX252GD49D125HM1
6"	DX351PH53D150PM1	DX351PSS53D150PM1	DX351BDS53D150PM1	DX252GD53D150HM1
	DX351PH03B150PM1	DX351PSS03B150PM1	DX351BDS03B150PM1	DX252GD03B150HM1
	DX351PH36D150PM1	DX351PSS36D150PM1	DX351BDS36D150PM1	DX252GD36D150HM1
	DX351PH46D150HM1	DX351PSS46D150HM1	DX351BDS46D150HM1	DX252GD46D150HM1
	DX351PH49D150PM1	DX351PSS49D150PM1	DX351BDS49D150PM1	DX252GD49D150HM1
8"	DX351PH53D200PM1	DX351PSS53D200PM1	DX351BDS53D200PM1	DX252GD53D200HM1
	DX351PH03B200PM1	DX351PSS03B200PM1	DX351BDS03B200PM1	DX252GD03B200HM1
	DX351PH36D200PM1	DX351PSS36D200PM1	DX351BDS36D200PM1	DX252GD36D200HM1
	DX351PH46D200HM1	DX351PSS46D200HM1	DX351BDS46D200HM1	DX252GD46D200HM1
	DX351PH49D200PM1	DX351PSS49D200PM1	DX351BDS49D200PM1	DX252GD49D200HM1

单轮 Wheel



超韧尼龙
high-strength Nylon



塑芯超级聚氨酯
Super Polyurethane




铁芯聚氨酯
Iron-core PU




铁芯橡胶
Iron-core Rubber



铸铁
Iron

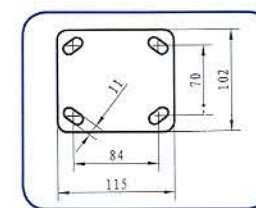

底板
Baseplate

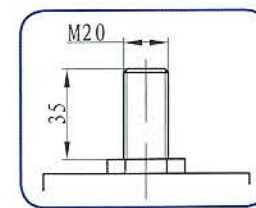

丝扣
Threaded stem

安装尺寸图 Fitting Dimension

单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
超韧尼龙 high-strength Nylon	42	双轴承 double bearing	220	29	140
塑芯聚氨酯 Super Polyurethane	45	一体轴承 Annular bearing	220	29	140
铁芯聚氨酯 Iron-core PU	46	双轴承 double bearing	300	29	140
铁芯橡胶 Iron-core Rubber	48	双轴承 double bearing	285	29	140
铸铁 Iron	46	双轴承 double bearing	320	29	140
超韧尼龙 high-strength Nylon	42	双轴承 double bearing	245	35	165
塑芯聚氨酯 Super Polyurethane	45	一体轴承 Annular bearing	260	35	165
铁芯聚氨酯 Iron-core PU	46	双轴承 double bearing	350	35	165
铁芯橡胶 Iron-core Rubber	48	双轴承 double bearing	335	35	165
铸铁 Iron	48	双轴承 double bearing	370	35	165
超韧尼龙 high-strength Nylon	42	双轴承 double bearing	300	40	190
塑芯聚氨酯 Super Polyurethane	45	一体轴承 Annular bearing	320	40	190
铁芯聚氨酯 Iron-core PU	46	双轴承 double bearing	430	40	190
铁芯橡胶 Iron-core Rubber	48	双轴承 double bearing	415	40	190
铸铁 Iron	50	双轴承 double bearing	450	40	190
超韧尼龙 high-strength Nylon	42	双轴承 double bearing	330	50	240
塑芯聚氨酯 Super Polyurethane	45	一体轴承 Annular bearing	360	50	240
铁芯聚氨酯 Iron-core PU	46	双轴承 double bearing	450	50	240
铁芯橡胶 Iron-core Rubber	48	双轴承 double bearing	435	50	240
铸铁 Iron	50	双轴承 double bearing	470	50	240



DX401PH03B150PM1



DX401PSS-B03B150PM1



DX401GD03B150PM1



PS401GD36D150HM1



PS401PH36D150HM1



PS401PH36D150PM1



PS401GD36D150PM1

规格 size	平底活动 swivel	平底前双刹 brake	平底边刹 side brake	固定 rigid
4"	DX401PH03B100PM1	DX401PSS-B03B100PM1	DX401BDS03B100PM1	DX401GD03B100PM1
	DX401PH13B100PM1	DX401PSS-B13B100PM1	DX401BDS13B100PM1	DX401GD13B100PM1
	DX401PH36D100PM1	DX401PSS-B36D100PM1	DX401BDS36D100PM1	DX401GD36D100PM1
	DX401PH56G100PM1	DX401PSS-A56G100PM1	DX401BDS56G100PM1	DX401GD56G100PM1
5"	DX401PH03B125PM1	DX401PSS-B03B125PM1	DX401BDS03B125PM1	DX401GD03B125PM1
	DX401PH13B125PM1	DX401PSS-B13B125PM1	DX401BDS13B125PM1	DX401GD13B125PM1
	DX401PH36D125PM1	DX401PSS-B36D125PM1	DX401BDS36D125PM1	DX401GD36D125PM1
	DX401PH36D125HM1	DX401PSS-B36D125HM1	DX401BDS36D125HM1	DX401GD36D125HM1
	DX401PH03B125FH2	DX401PSS-B03B125FH2	DX401BDS03B125FH2	DX401GD03B125FH2
	DX401PH03B125FH1	DX401PSS-B03B125FH1	DX401BDS03B125FH1	DX401GD03B125FH1
	DX401PH56G125PM1	DX401PSS-A56G125PM1	DX401BDS56G125PM1	DX401GD56G125PM1
	DX401PH03B150PM1	DX401PSS-B03B150PM1	DX401BDS03B150PM1	DX401GD03B150PM1
6"	DX401PH13B150PM1	DX401PSS-B13B150PM1	DX401BDS13B150PM1	DX401GD13B150PM1
	DX401PH36D150PM1	DX401PSS-B36D150PM1	DX401BDS36D150PM1	DX401GD36D150PM1
	DX401PH36D150HM1	DX401PSS-B36D150HM1	DX401BDS36D150HM1	DX401GD36D150HM1
	DX401PH03B150FH2	DX401PSS-B03B150FH2	DX401BDS03B150FH2	DX401GD03B150FH2
	DX401PH03B150FH1	DX401PSS-B03B150FH1	DX401BDS03B150FH1	DX401GD03B150FH1
	DX401PH56G150PM1	DX401PSS-A56G150PM1	DX401BDS56G150PM1	DX401GD56G150PM1
	DX401PH03B200PM1	DX401PSS-B03B200PM1	DX401BDS03B200PM1	DX401GD03B200PM1
	DX401PH13B200PM1	DX401PSS-B13B200PM1	DX401BDS13B200PM1	DX401GD13B200PM1
8"	DX401PH36D200PM1	DX401PSS-B36D200PM1	DX401BDS36D200PM1	DX401GD36D200PM1
	DX401PH36D200HM1	DX401PSS-B36D200HM1	DX401BDS36D200HM1	DX401GD36D200HM1
	DX401PH03B200FH2	DX401PSS-B03B200FH2	DX401BDS03B200FH2	DX401GD03B200FH2
	DX401PH03B200FH1	DX401PSS-B03B200FH1	DX401BDS03B200FH1	DX401GD03B200FH1
	DX401PH56G200PM1	DX401PSS-A56G200PM1	DX401BDS56G200PM1	DX401GD56G200PM1

单轮 Wheel



塑芯聚氨酯
Super Polyurethane



铁芯聚氨酯(扁)
Iron-core PU(flat)



铁芯聚氨酯(弧)
Iron-core PU(arc)



烽火聚氨酯
Flame PU



塑芯尼龙
Super Nylon




酚醛
Phenolic




防滑聚氨酯
Skidproof PU

安装尺寸图 Fitting Dimension

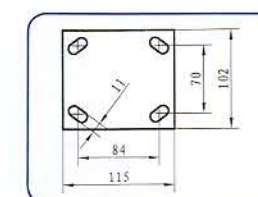

底板
Baseplate

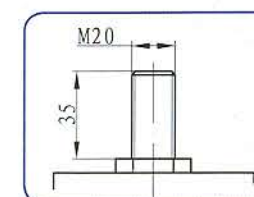

丝扣
Threaded stem

单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
塑芯聚氨酯 Super Polyurethane	45	一体轴承 annular bearing	220	34	140
塑芯尼龙 Super Nylon	45	滚珠 ball	270	34	140
平面铁芯聚氨酯 Iron-core PU(flat)	46	滚针 needle	300	34	138
酚醛 Phenolic	50	滚针 needle	150	34	140
塑芯聚氨酯 Super Polyurethane	50	一体轴承 annular bearing	260	37	165
塑芯尼龙 Super Nylon	50	滚珠 ball	340	37	165
平面铁芯聚氨酯 Iron-core PU(flat)	48	滚珠 ball	350	37	164
圆面铁芯聚氨酯 Iron-core PU(arc)	48	滚珠 ball	340	37	165
防滑聚氨酯 Skidproof PU	50	一体轴承 annular bearing	280	37	165
烽火聚氨酯 Flame PU	50	滚针 needle	280	37	165
酚醛 Phenolic	50	滚针 needle	180	37	165
塑芯聚氨酯 Super Polyurethane	50	一体轴承 annular bearing	320	43	190
塑芯尼龙 Super Nylon	50	滚珠 ball	370	43	190
平面铁芯聚氨酯 Iron-core PU(flat)	50	滚珠 ball	430	43	189
圆面铁芯聚氨酯 Iron-core PU(arc)	48	滚珠 ball	420	43	190
防滑聚氨酯 Skidproof PU	50	一体轴承 annular bearing	350	43	190
烽火聚氨酯 Flame PU	50	滚针 needle	350	43	190
酚醛 Phenolic	50	滚针 needle	200	43	190
塑芯聚氨酯 Super Polyurethane	50	一体轴承 annular bearing	360	49	238
塑芯尼龙 Super Nylon	50	滚珠 ball	400	49	238
平面铁芯聚氨酯 Iron-core PU(flat)	50	滚珠 ball	450	49	237
圆面铁芯聚氨酯 Iron-core PU(arc)	48	滚珠 ball	430	49	238
防滑聚氨酯 Skidproof PU	50	一体轴承 annular bearing	380	49	238
烽火聚氨酯 Flame PU	50	滚针 needle	380	49	238
酚醛 Phenolic	50	滚针 needle	220	49	238



PS451PH46D150PM1



PS451GD46D150PM1



PS451HSS36D150PM1



PS451PH36D150HM1



PS451GD36D150HM1



PS451PH36D150PM1



PS451GD36D150PM1

单轮 Wheel



铁芯聚氨酯(弧)
Iron-core PU(arc)



铁芯橡胶
Iron-core Rubber



铁芯聚氨酯(扁)
Iron-core PU(flat)




铁芯聚氨酯(弧)
Iron-core PU(arc)




铁芯尼龙
Iron-core Nylon

安装尺寸图 Fitting Dimension

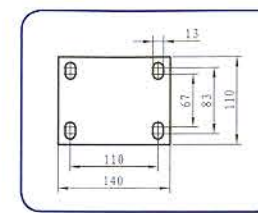

5"、6"、8" 底板
5"、6"、8" Baseplate

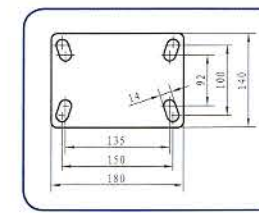

10"、12" 底板
10"、12" Baseplate

规格 size	平底活动 swivel	平底后双刹 brake	固定 rigid
5"	PS451PH36D125PM1	PS451HSS36D125PM1	PS451GD36D125PM1
	PS451PH36D125HM1	PS451HSS36D125HM1	PS451GD36D125HM1
	PS451PH46D125HM1	PS451HSS46D125HM1	PS451GD46D125HM1
	PS451PH49D125PM1	PS451HSS49D125PM1	PS451GD49D125PM1
	PS451PH26D125HM1	PS451HSS26D125HM1	PS451GD26D125HM1
6"	PS451PH36D150PM1	PS451HSS36D150PM1	PS451GD36D150PM1
	PS451PH36D150HM1	PS451HSS36D150HM1	PS451GD36D150HM1
	PS451PH46D150HM1	PS451HSS46D150HM1	PS451GD46D150HM1
	PS451PH49D150PM1	PS451HSS49D150PM1	PS451GD49D150PM1
	PS451PH26D150HM1	PS451HSS26D150HM1	PS451GD26D150HM1
8"	PS451PH36D200PM1	PS451HSS36D200PM1	PS451GD36D200PM1
	PS451PH36D200HM1	PS451HSS36D200HM1	PS451GD36D200HM1
	PS451PH46D200HM1	PS451HSS46D200HM1	PS451GD46D200HM1
	PS451PH49D200PM1	PS451HSS49D200PM1	PS451GD49D200PM1
	PS451PH26D200HM1	PS451HSS26D200HM1	PS451GD26D200HM1
10"	PS451PH36D250PM1	PS451HSS36D250PM1	PS451GD36D250PM1
	PS451PH49D250PM1	PS451HSS49D250HM1	PS451GD49D250PM1
	PS451PH26D250HM1	PS451HSS26D250PM1	PS451GD26D250HM1
12"	PS451PH36D300PM1	PS451HSS36D300PM1	PS451GD36D300PM1
	PS451PH49D300PM1	PS451HSS49D300HM1	PS451GD49D300PM1
	PS451PH26D300HM1	PS451HSS49D300PM1	PS451GD26D300HM1

单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
平面铁芯聚氨酯	48	滚珠 ball	550	32	169
弧面铁芯聚氨酯	48	滚珠 ball	400	32	169
铁芯橡胶	48	滚珠 ball	220	32	169
铸铁	48	滚珠 ball	600	32	169
铁芯尼龙	48	滚珠 ball	600	32	169
平面铁芯聚氨酯	50	滚珠 ball	650	34	196
弧面铁芯聚氨酯	48	滚珠 ball	500	34	196
铁芯橡胶	48	滚珠 ball	300	34	196
铸铁	50	滚珠 ball	700	34	196
铁芯尼龙	48	滚珠 ball	700	34	196
平面铁芯聚氨酯	50	滚珠 ball	800	45	246
弧面铁芯聚氨酯	48	滚珠 ball	600	45	246
铁芯橡胶	48	滚珠 ball	380	45	246
铸铁	50	滚珠 ball	850	45	246
铁芯尼龙	48	滚珠 ball	850	45	246
平面铁芯聚氨酯	62	滚珠 ball	1000	60	300
铸铁	62	滚珠 ball	1050	60	300
铁芯尼龙	62	滚珠 ball	1050	60	300
平面铁芯聚氨酯	62	滚珠 ball	1200	70	350
铸铁	62	滚珠 ball	1500	70	350
铁芯尼龙	62	滚珠 ball	1500	70	350

■ 支架 Bracket



PS501PH26D150PM1



PS501GD26D150PM1

■ 单轮 Wheel




铁芯聚氨酯
Iron-core PU




铁芯尼龙
Iron-core Nylon

■ 安装尺寸图 Fitting Dimension



6"、8"底板
6"、8" Baseplate

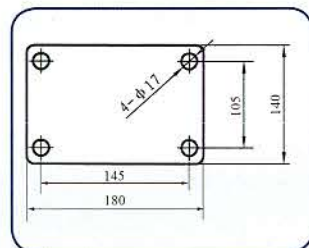

10" 底板
10" Baseplate

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
6"	PS501PH36D150PM1	PS501PSS36D150PM1	PS501GD36D150PM1	铁芯聚氨酯	64	滚珠 ball	1000	50	205
	PS501PH26D150PM1	PS501PSS26D150PM1	PS501GD26D150PM1	铁芯尼龙	64	滚珠 ball	1300	50	205
	PS501PH49D150PM1	PS501PSS49D150PM1	PS501GD49D150PM1	铸铁	64	滚珠 ball	1300	50	205
8"	PS501PH36D200PM1	PS501PSS36D200PM1	PS501GD36D200PM1	铁芯聚氨酯	64	滚珠 ball	1200	52	255
	PS501PH26D200PM1	PS501PSS26D200PM1	PS501GD26D200PM1	铁芯尼龙	64	滚珠 ball	1600	52	255
	PS501PH49D200PM1	PS501PSS49D200PM1	PS501GD49D200PM1	铸铁	64	滚珠 ball	1600	52	255
10"	PS501PH36D250PM1	PS501PSS36D250PM1	PS501GD36D250PM1	铁芯聚氨酯	80	滚珠 ball	1500	52	310
	PS501PH26D250PM1	PS501PSS26D250PM1	PS501GD26D250PM1	铁芯尼龙	80	滚珠 ball	1900	52	310
	PS501PH49D250PM1	PS501PSS49D250PM1	PS501GD49D250PM1	铸铁	80	滚珠 ball	1900	52	310
12"	PS501PH36D300PM1	PS501PSS36D300PM1	PS501GD36D300PM1	铁芯聚氨酯	80	滚珠 ball	2000	58	
	PS501PH26D300PM1	PS501PSS26D300PM1	PS501GD26D300PM1	铁芯尼龙	80	滚珠 ball	2500	58	
	PS501PH49D300PM1	PS501PSS49D300PM1	PS501GD49D300PM1	铸铁	80	滚珠 ball	2500	58	

■ 支架 Bracket



PS551PH36D150PM1



PS551GD26D150PM1

■ 单轮 Wheel




铁芯聚氨酯
Iron-core PU




铁芯尼龙
Iron-core Nylon

■ 安装尺寸图 Fitting Dimension

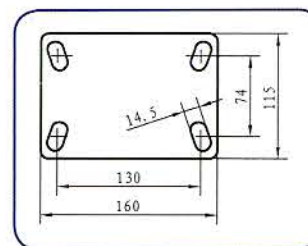


6"、8"底板
6"、8" Baseplate




10" 底板
10" Baseplate

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
6"	PS551PH36D150PM1	PS551PSS36D150PM1	PS551GD36D150PM1	铁芯聚氨酯	64	滚珠 ball	2000	50	205
	PS551PH26D150PM1	PS551PSS26D150PM1	PS551GD26D150PM1	铁芯尼龙	64	滚珠 ball	2500	50	205
	PS551PH49D150PM1	PS551PSS49D150PM1	PS551GD49D150PM1	铸铁	64	滚珠 ball	2500	50	205
8"	PS551PH36D200PM1	PS551PSS36D200PM1	PS551GD36D200PM1	铁芯聚氨酯	64	滚珠 ball	2500	52	255
	PS551PH26D200PM1	PS551PSS26D200PM1	PS551GD26D200PM1	铁芯尼龙	64	滚珠 ball	3500	52	255
	PS551PH49D200PM1	PS551PSS49D200PM1	PS551GD49D200PM1	铸铁	64	滚珠 ball	3500	52	255
10"	PS551PH36D250PM1	PS551PSS36D250PM1	PS551GD36D250PM1	铁芯聚氨酯	80	滚珠 ball	3500	75	350
	PS551PH26D250PM1	PS551PSS26D250PM1	PS551GD26D250PM1	铁芯尼龙	80	滚珠 ball	5000	75	350
	PS551PH49D250PM1	PS551PSS49D250PM1	PS551GD49D250PM1	铸铁	80	滚珠 ball	5000	75	350
12"	PS551PH36D300PM1	PS551PSS36D300PM1	PS551GD36D300PM1	铁芯聚氨酯	80	滚珠 ball	3800	80	
	PS551PH26D300PM1	PS551PSS26D300PM1	PS551GD26D300PM1	铁芯尼龙	80	滚珠 ball	5000	80	
	PS551PH49D300PM1	PS551PSS49D300PM1	PS551GD49D300PM1	铸铁	80	滚珠 ball	5000	80	

■ 支架 Bracket



PS601GD36D150PM1



PS601GD36D150HM1


■ 单轮 Wheel


铁芯橡胶
Iron-core Rubber

铁芯聚氨酯(扁)
Iron-core PU (flat)

铁芯聚氨酯(弧)
Iron-core PU (arc)

■ 安装尺寸图 Fitting Dimension

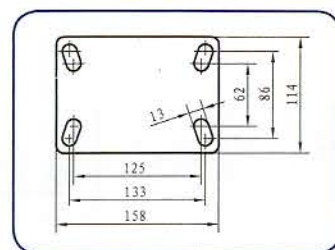
底板
Baseplate

规格 size	平底活动 swivel	固定 rigid	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height
5"	PS601PH36D125PM1	PS601GD36D125PM1	铁芯聚氨酯	50	滚珠 ball	450	50	185
	PS601PH46D125HM1	PS601GD46D125HM1	铁芯橡胶	50	滚珠 ball	435	50	185
6"	PS601PH36D150PM1	PS601GD36D150PM1	铁芯聚氨酯	50	滚珠 ball	480	50	197
	PS601PH46D150HM1	PS601GD46D150HM1	铁芯橡胶	50	滚珠 ball	465	50	197
8"	PS601PH36D200PM1	PS601GD36D200PM1	铁芯聚氨酯	50	滚珠 ball	530	63	247
	PS601PH46D200HM1	PS601GD46D200HM1	铁芯橡胶	50	滚珠 ball	515	63	247

■ 支架 Bracket




DG651DH03D125PM1

■ 单轮 Wheel


购物车轮
elevator wheel

■ 安装尺寸图 Fitting Dimension

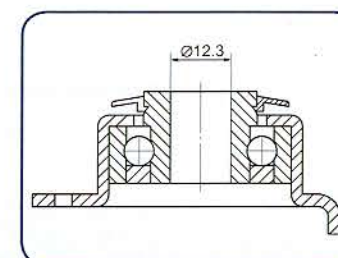
顶孔
Bolt hole

规格 size	顶孔活动 bolt hole swivel	顶孔刹车 bolt hole brake	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	顶孔全高 height
4"	DG651DH03D100PM1	DG651DSS03D100PM1	DG651LH03D100PM1	DG651LSS03D100PM1	聚氨酯PU	30	滚珠 ball	100	36	130
5"	DG651DH03D125PM1	DG651DSS03D125PM1	DG651LH03D125PM1	DG651LSS03D125PM1				120	39	153

支架 Bracket



DG701LH09C100PM1



DG701CH09C100PM1



DG701LSS09C100PM1

单轮 Wheel




超级人造胶
Artificial Rubber




超级聚氨酯
Super Polyurethane


安装尺寸图 Fitting Dimension

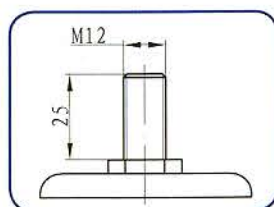

丝扣
Threaded stem

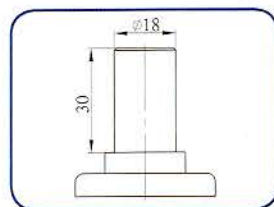

插杆
Stem

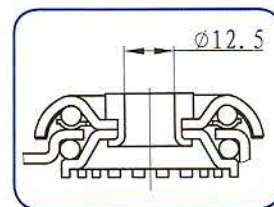

顶孔
Bolt hole

规格 size	顶孔活动 bolt hole swivel	顶孔刹车 bolt hole brake	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake	插杆活动 stem swivel	插杆刹车 stem brake	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	顶孔全高 height	螺丝全高 height	插杆全高 height
3"	DG701DH09C075PM1	DG701DSS09C075PM1	DG701LH09C075PM1	DG701LSS09C075PM1	DG701CH09C075PM1	DG701CSS09C075PM1	超级人造胶 Super Artificial Rubber	25	滚珠 ball	60	36	107	110	107
	DG701DH03C075PM1	DG701DSS03C075PM1	DG701LH03C075PM1	DG701LSS03C075PM1	DG701CH03C075PM1	DG701CSS03C075PM1	超级聚氨酯 Super Polyurethane	25	滚珠 ball	70	36	107	110	107
4"	DG701DH09C100PM1	DG701DSS09C100PM1	DG701LH09C100PM1	DG701LSS09C100PM1	DG701CH09C100PM1	DG701CSS09C100PM1	超级人造胶 Super Artificial Rubber	25	滚珠 ball	70	40	132	135	132
	DG701DH03C100PM1	DG701DSS03C100PM1	DG701LH03C100PM1	DG701LSS03C100PM1	DG701CH03C100PM1	DG701CSS03C100PM1	超级聚氨酯 Super Polyurethane	25	滚珠 ball	80	40	132	135	132
5"	DG701DH09C125PM1	DG701DSS09C125PM1	DG701LH09C125PM1	DG701LSS09C125PM1	DG701CH09C125PM1	DG701CSS09C125PM1	超级人造胶 Super Artificial Rubber	25	滚珠 ball	90	45	157	160	157
	DG701DH03C125PM1	DG701DSS03C125PM1	DG701LH03C125PM1	DG701LSS03C125PM1	DG701CH03C125PM1	DG701CSS03C125PM1	超级聚氨酯 Super Polyurethane	25	滚珠 ball	100	45	157	160	157


支架 Bracket



DX751PH09C075PM1




DX751PSS09C075PM1

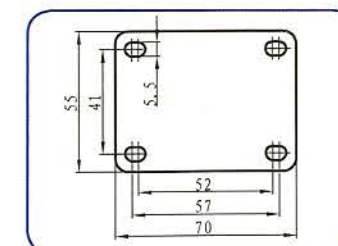


底板
Baseplate

规格 size	平底活动 swivel	平底刹车 brake	固定 rigid	顶孔活动 bolt hole swivel	顶孔刹车 bolt hole brake	螺丝活动 threaded stem swivel	螺丝刹车 threaded stem brake	单轮材质 material	轮宽 width	轴承 bearing	载重 load	偏心距 offset	平底全高 height	顶孔全高 height
3"	DX751PH09C075PM1	DX751PSS09C075PM1	DX751GD09C075PM1	DX751DH09C075PM1	DX751DSS09C075PM1	DX751LH09C075PM1	DX751LSS09C075PM1	超级人造胶	25	滚珠	80	28	102	100
	DX751PH03C075PM1	DX751PSS03C075PM1	DX751GD03C075PM1	DX751DH03C075PM1	DX751DSS03C075PM1	DX751LH03C075PM1	DX751LSS03C075PM1	塑芯聚氨酯	25	滚珠	100	28	102	100

定制产品 Special caster



KQ852PSS36D200PM1



DX402CSS36DPM1

定制产品: A: 液压叉车轮 B: 脚手架轮

规格 size	平底活动 swivel	平底刹车 brake	插杆刹车 stem brake	单轮材质 material	轮宽 width	轴承 bearing	载重 load	平底全高 height	插杆全高 height
8"A	KQ852PH36D200PM1	KQ852PSS36D200PM1	—	铁芯聚氨酯 iron-core PU	50	滚珠 ball	550	265	—
6"B	—	—	DX402CSS36DPM1	铁芯聚氨酯 iron-core PU	50	滚珠 ball	350	—	180



江苏申牌万向轮有限公司

JIANGSU SHENPAI CASTER CO.,LTD.

生产基地：江苏省江阴市璜土工业园区

Add: Huangtu Industrial Park Jiangyin, Jiangsu, China

全国质量投诉热线：800 828 7707

电话(TEL): (86) 510-86651178

(86) 510-86652178

传真(FAX): (86) 510-86656653 86652616

邮编(P.C.): 214445

Http: //www.shenpai.com

E-mail: sunnyeagle@shenpaicaster.cn

本地区：唯一指定品牌服务商

手册中有部分产品正在开发中，请在配套选用时详细咨询当地授权服务商。

