


10A 系列 SERIES 微型 Micro Duty

安装尺寸 Installation Drawing

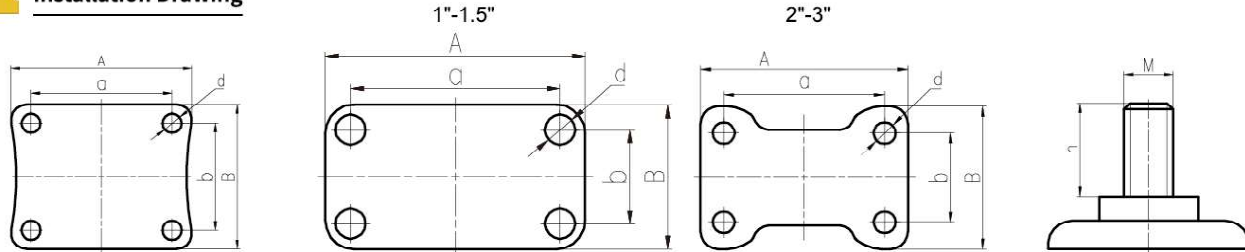

平底活动 刹车底板
Plate of Swivel Caster

平底固定底板
Plate of Rigid Caster

丝杆
Threaded Stem

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a×b	孔径 Φd
1"	25	38×33	30×24	4.2
1.25"	32	38×33	30×24	4.2
1.5"	38	46×39	36×28	5.2
2"	50	59×47	46×35	6.2
2.5"	63	70×58	55×42	8.3
3"	75	70×58	55×42	8.3

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a×b	孔径 Φd
1"	25	36×20	29×13	4.2
1.25"	32	36×20	29×13	4.2
1.5"	38	46×25	36×15	5.2
2"	50	58×40	45×25	6.2
2.5"	63	70×47	55×28	8.3
3"	75	70×47	55×28	8.3

尺寸 D	轮径 D	丝杆 m×h
1.5"	38	M8×15
2"	50	M10×15
2.5"	63	M12×25
3"	75	M12×25




1-3"
10-50 Kg

行走测试标准按3.2km/h检测 Walking test standard according to 3.2km/h

		 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	 轮片直径 (inch) Wheel diameter	 轮面宽度 (mm) Tire width	 载重 (kg) Capacity	 平底固定 Rigid	 装箱数 PCs/CTN	 平底活动 Swivel	 装箱数 PCs/CTN	 平底刹车 Swivel with brake	 装箱数 PCs/CTN	 丝杆活动 Threaded stem swivel	 装箱数 PCs/CTN	 丝杆刹车 Threaded stem swivel with brake	 装箱数 PCs/CTN
 	运行省力 Rollability  优秀 Excellent		轮面硬度 Hardness 75D±3	聚丙烯 Polypropylene	无轴承 None	1"	13	10	10A02-1001	700	10A01-1001	700	-	-	-	-	-	-
	耐磨耐用 Durability  一般 Average					1.25"	13	16	10A05-1002	500	10A04-1002	500	-	-	-	-	-	-
	运行静音 Quiet Operation  一般 Average					1.5"	17	20	10A09-1003	300	10A07-1003	300	10A08-1003	250	10A10-1003	300	10A11-1003	250
	地面保护 Floor Protection  一般 Average					2"	22	30	10A14-1004	150	10A12-1004	150	10A13-1004	100	10A15-1004	150	10A16-1004	100
						2.5"	27	40	10A19-1005	80	10A17-1005	80	10A18-1005	60	10A20-1005	80	10A21-1005	60
						3"	27	50	10A24-1006	60	10A22-1006	60	10A23-1006	50	10A25-1006	60	10A26-1006	50

外形尺寸 Overall Dimensions

尺寸 D	轮径 D	平底全高 H	丝杆全高 H	偏心距 F	旋转半径 r
1"	25	35	-	12	24.5
1.25"	32	42	-	14	30
1.5"	38	50	56	17	36
2"	50	65	68	23	48
2.5"	63	82	85	29	60.5
3"	75	92	95	29	66.5

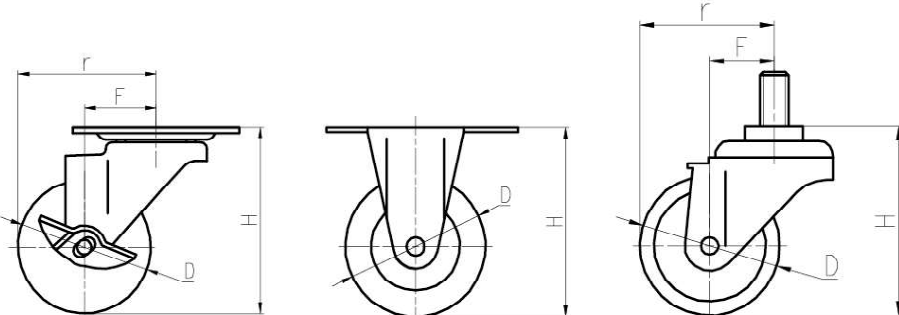

产品特点 Product Features

- 镀锌支架 Galvanized bracket
- 板材厚度 Thickness of steel plate


尺寸 Wheel size	底板厚度 Thickness of top plate	支架厚度 Thickness of bracket
1"-1.25"	1.5mm	1.2mm
1.5"	1.5mm	1.5mm
2"	2mm	2mm
2.5"-3"	2.5mm	2mm

定制产品 Customized Product




10B 系列 SERIES 微型 Micro Duty


安装尺寸 Installation Drawing



平底活动 刹车底板
Plate of Swivel Caster

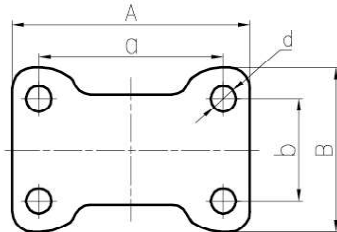

平底固定底板
Plate of Rigid Caster



丝杆
Threaded Stem

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a×b	孔径 Φd
1"	25	39×33	30×24	4.3
1.25"	32	39×33	30×24	4.3
1.5"	38	46×39.5	36×28	4.3
2"	50	46×39.5	36×28	5.2

尺寸 D	轮径 D	底板尺寸 A×B	孔距 a×b	孔径 Φd
1"	25	38×30	30×24	4.3
1.25"	32	39×33	30×24	4.3
1.5"	38	46×37.5	36×28	4.3
2"	50	46×38	36×28	5.2

尺寸 D	轮径 D	丝杆 m×h
1"	25	M8×20
1.25"	32	M8×20
1.5"	38	M8×20
2"	50	M10×25






1-2.5"
10-28 Kg

行走测试标准按3.2km/h检测 Walking test standard according to 3.2km/h

	 性能参数 Performance parameters		 轮面材质 Wheel material	 轮片轴承 Bearing	 轮片直径 (inch) Wheel diameter	 轮面宽度 (mm) Tire width	 载重 (kg) Capacity	 平底固定 Rigid	 装箱数 PCs/CTN	 平底活动 Swivel	 装箱数 PCs/CTN	 平底刹车 Swivel with brake	 装箱数 PCs/CTN	 丝杆活动 Threaded stem swivel	 装箱数 PCs/CTN	 丝杆刹车 Threaded stem swivel with brake	 装箱数 PCs/CTN	
	运行省力 Rollability	良好 Good	轮面硬度 Hardness 85±3A	人造胶 Thermoplastic elastomer on plastic core	单滚珠 Single ball bearing	1"	13	10	10B02-1510	650	10B01-1510	650	10B03-1510	550	10B04-1510	650	10B05-1510	550
耐磨耐用 Durability	良好 Good	1.25"				13	15	10B07-1511	500	10B06-1511	500	10B08-1511	400	10B09-1511	500	10B10-1511	400	
运行静音 Quiet Operation	优秀 Excellent	1.5"				17	20	10B12-1512	250	10B11-1512	250	10B13-1512	200	10B14-1512	250	10B15-1512	200	
地面保护 Floor Protection	优秀 Excellent	2"				17	25	10B17-1513	150	10B16-1513	150	10B18-1513	120	10B19-1513	150	10B20-1513	120	
	运行省力 Rollability	优秀 Excellent	轮面硬度 Hardness 75D±3	尼龙 Nylon	无轴承 None	1"	13	15	10B02-1514	650	10B01-1514	650	10B03-1514	550	10B04-1514	650	10B05-1514	550
耐磨耐用 Durability	优秀 Excellent	1.25"				13	18	10B07-1515	500	10B06-1515	500	10B08-1515	400	10B09-1515	500	10B10-1515	400	
运行静音 Quiet Operation	一般 Average	1.5"				17	25	10B12-1516	250	10B11-1516	250	10B13-1516	200	10B14-1516	250	10B15-1516	200	
地面保护 Floor Protection	一般 Average	2"				17	28	10B17-1517	150	10B16-1517	150	10B18-1517	120	10B19-1517	150	10B20-1517	120	

外形尺寸 Overall Dimensions

尺寸 D	轮径 D	平底 全高 H	丝杆 全高 H	偏心距 F	旋转 半径 r	旋转 半径 R
1"	25	37.5	39.5	15.5	28	47.5
1.25"	32	44.5	46.5	15	31	49
1.5"	38	52	54	18.5	37.5	59.5
2"	50	64	67	19	44	62.5



产品特点 Product Features

- 镀铬支架
·Chromed bracket
- 优质TPR注塑而成
·Injection with TPR
- 保护地面,不留痕迹
·Floor-protective, traceless


·板材厚度 ·Thickness of steel plate

尺寸 Wheel size	底板厚度 Thickness of top plate	支架厚度 Thickness of bracket
1-1.25"	1.2mm	1.2mm
1.5-2"	1.5mm	1.5mm


10D 系列 SERIES

不锈钢(微型) Stainless Steel(Micro Duty)


安装尺寸 Installation Drawing



平底活动 刹车底板
Plate of Swivel Caster



平底固定底板
Plate of Rigid Caster



丝杆
Threaded Stem




1.5-2"
30-50 Kg

PRPS	性能参数 Performance parameters	轮面材质 Wheel material	轮片轴承 Bearing	轮片直径 (inch) Wheel diameter	轮面宽度 (mm) Tire width	载重 (kg) Capacity	平底固定 Rigid	装箱数 PCs /CTN	平底活动 Swivel	装箱数 PCs /CTN	平底刹车 Swivel with brake	装箱数 PCs /CTN	丝杆活动 Threaded stem swivel	装箱数 PCs /CTN	丝杆刹车 Threaded stem swivel with brake	装箱数 PCs /CTN
	运行省力 Rollability	良好 Good	单滚珠 Single ball bearing	1.5"	20	30	10D02-1631	150	10D01-1631	150	10D03-1631	120	10D04-1631	150	10D05-1631	120
	耐磨耐用 Durability			2"	22	50	10D07-1632	120	10D06-1632	120	10D08-1632	100	10D09-1632	120	10D10-1632	100
	运行静音 Quiet Operation															
	地面保护 Floor Protection															
	运行省力 Rollability	优秀 Excellent	单滚珠 Single ball bearing	1.5"	20	30	10D02-1629	150	10D01-1629	150	10D03-1629	120	10D04-1629	150	10D05-1629	120
	耐磨耐用 Durability			2"	22	50	10D07-1630	120	10D06-1630	120	10D08-1630	100	10D09-1630	150	10D10-1630	100
	运行静音 Quiet Operation															
	地面保护 Floor Protection															

外形尺寸 Overall Dimensions

尺寸	轮径	平底全高	丝杆全高	偏心距	旋转半径	旋转半径
D	D	H	H	F	r	R
1.5"	40	60	67	25	45	67
2"	50	70	77	23	48	67

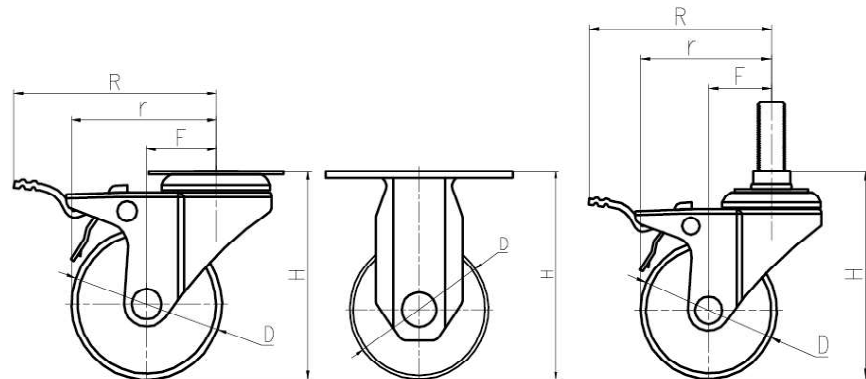

产品特点 Product Features

- 304不锈钢支架
- 底板厚度2mm
- 支架厚度2mm
- 防锈耐腐蚀
- 304 Stainless steel bracket
- Thickness of top plate 2mm
- Thickness of bracket 2mm
- Antirust & anti-corrosion